




DESIGNED TO FILL GAPS WITH PRECISION AND QUALITY

DRIFTIce™

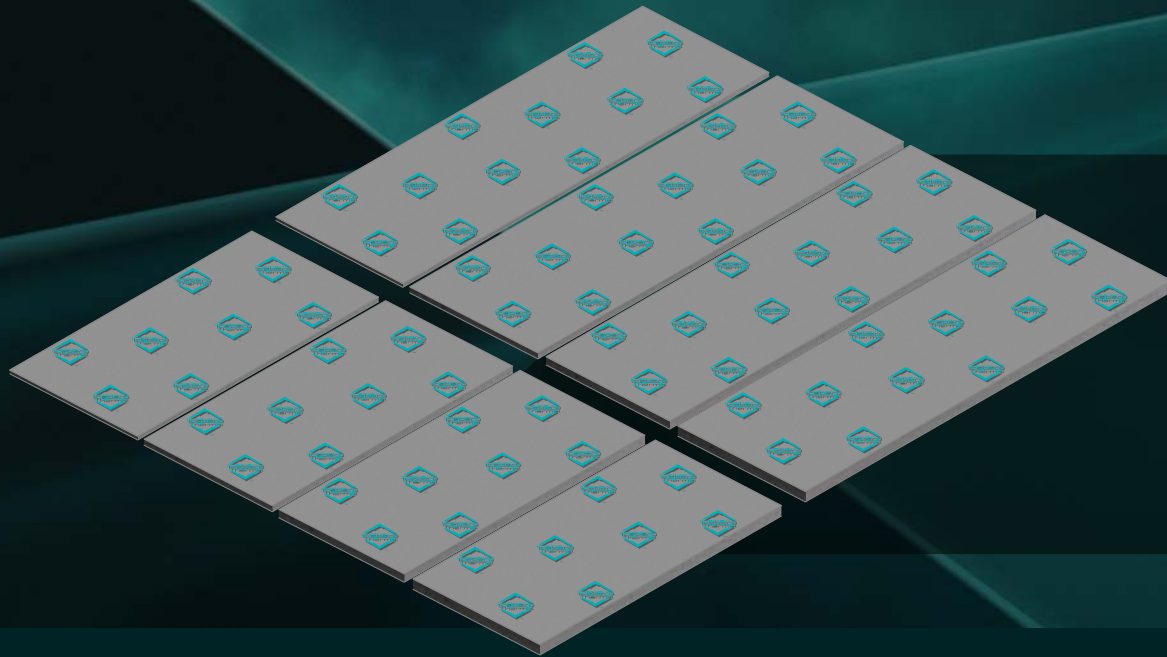

- Guaranteed Not to Harden or Corrode
- Made of Non-Toxic Material
- Precise and Even Contact, Filling Air Gaps

DRIFTIce™

Thermal Conductivity, 13 W/mK
Available in 2 Sizes and 4 Thicknesses

Size	40 x 80 mm 40 x 120 mm
------	---------------------------

Thickness	0.5 mm 1.0 mm 1.5 mm 2.0 mm
-----------	--------------------------------------

Specific Gravity	3.14 g / cm ³
------------------	--------------------------

Hardness	45 Shore 00
----------	-------------

Thermal Conductivity	13 W/mK
----------------------	---------

Operating Temperature	-40°C to 200°C
-----------------------	----------------

