

# USB-C™ Pro Docking Station 15 Port with SSD Slot

CDS-15S




M.2 SSD Slot



1x USB-C 3.2 Gen2  
4x USB-A



Support triple display  
2x HDMI & 1x DP



RJ45 Ethernet Port

## Unleash your productivity.

Empower your workspace with Verbatim CDS-15S, a dynamic docking station featuring one USB-C 3.2 Gen2 and two USB-A 3.2 Gen2 ports for swift data transfer. The USB-A 480 Mb/s, RJ45, and SD/MicroSD slots ensure versatile connectivity.

Elevate your storage capabilities with the M.2 SSD slot, unlocking rapid access to essential files and simplifying automatic backup. Experience visual brilliance with dual HDMI and single DP 8K connection, facilitating immersive triple display setups.

This docking station seamlessly integrates high-performance components to streamline your workflow, catering to professionals handling data-intensive tasks.

# USB-C™ Pro Docking Station

## 15 Port with SSD Slot

CDS-15S

### General Information

|                          |                    |
|--------------------------|--------------------|
| Product dimensions LxWxD | 168 x 68,5 x 34 mm |
| Product weight           | 340                |
| Material                 | Aluminum+ABS       |
| Colour                   | Black/Grey         |

### Connections

|             |                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Host Port   | USB-C Host to connect to your device.                                                                                                                                                                                                                                                                                                                        |
| Power IN    | USB-C PD: supports up to 80W charging, input max. 100W to connect your power supply.                                                                                                                                                                                                                                                                         |
| USB Ports   | 1 x USB-A 2.0: up to 480Mb/s - Design for the connection of 2.4 GHz wireless devices, such as wireless keyboards/mouse adapters etc.<br>2 x USB-A 3.2 Gen1: up to 5Gb/s backwards compatible with USB 2.0.<br>1 x USB-A 3.2 Gen2: up to 10Gb/s backwards compatible with USB 3.2 Gen1 and USB 2.0.<br><br>1 x USB-C 3.2 Gen2: up to 10Gb/s<br>Power: 5V 0.9A |
| Video*      | 2 x HDMI: 8K@30Hz, 4K/60Hz/10bit, 1080p/60Hz/48bit, 720p/60Hz/48bit<br>Supports 1080p/720p - Bandwidth: 12G<br><br>1 x DP 1.4: 8K@30Hz, 4K/60Hz/10bit, 1080p/60Hz/48bit, 720p/60Hz/48bit.<br>Supports 1080p/720p - Bandwidth: 8G                                                                                                                             |
| Audio       | 1 x Audio jack 3.5mm: in/out /8 channel sampling rate 192khz/16bit                                                                                                                                                                                                                                                                                           |
| Memory Card | 1 x SD 4.0: Read speed: Up to 250MB/s, Write speed: Up to 250MB/s<br>1 x Micro SD 3.0 Read speed: Up to 104MB/s, Write speed: Up to 80MB/s                                                                                                                                                                                                                   |
| Ethernet    | 1 x RJ45, up to 1Gb/s                                                                                                                                                                                                                                                                                                                                        |
| SSD Slot    | M.2 NVMe PCIe M Key/B&M Key (10Gb/s)<br>M.2 SATA B&M Key (5Gb/s)                                                                                                                                                                                                                                                                                             |

### Other Features

|              |                                     |
|--------------|-------------------------------------|
| Supported OS | Windows 10/11, MacOS 10.2 or higher |
| Status LED   | Yes                                 |
| Power Switch | Yes                                 |
| Safety Lock  | Kensington Security Lock Slot       |

### Storage and Operating Conditions

|                       |                               |
|-----------------------|-------------------------------|
| Operating Temperature | 0°C to 40°C (32°F to 104°F)   |
| Operating Humidity    | 20%-90%RH                     |
| Storage Temperature   | -20°C to 85°C (-4°F to 185°F) |
| Storage Humidity      | 5%-95%RH                      |

| DP 1.4         | HDMI                | HDMI                | DP                  |
|----------------|---------------------|---------------------|---------------------|
| Single Display | 8k@30Hz or 4K@120Hz | -                   | -                   |
|                | -                   | 8k@30Hz or 4K@120Hz | -                   |
|                | -                   | -                   | 8k@30Hz or 4K@120Hz |
| Dual Display   | 4K@60Hz             | 4K@60Hz             | -                   |
|                | -                   | 4K@60Hz             | 4K@60Hz             |
|                | 4K@60Hz             | -                   | 4K@60Hz             |
| Triple Display | 4K@60Hz             | 4K@30Hz             | 4K@30Hz             |

| DP 1.2         | HDMI                                | HDMI       | DP         |
|----------------|-------------------------------------|------------|------------|
| Single Display | 4K@30Hz                             | -          | -          |
|                | -                                   | 4K@30Hz    | -          |
|                | -                                   | -          | 4K@30Hz    |
| Dual Display   | 2K@60Hz                             | 1080p@60Hz | -          |
|                | -                                   | 2K@60Hz    | 1080p@60Hz |
|                | 1080p@60Hz                          | -          | 2K@60Hz    |
| Triple Display | Supports a maximum of two displays. |            |            |

\* Check which DP mode is supported by your device. MacOS only supports extension to one external monitor, second and third monitor can only mirror the first one. Windows has no limitations.


# USB-C™ Pro Docking Station 15 Port with SSD Slot

CDS-15S

| PN    | Description                                             | Bar Code     | EAN128 Code                    | EAN14 Code     |
|-------|---------------------------------------------------------|--------------|--------------------------------|----------------|
| 32173 | USB-C Pro Docking Station 15 Port with SSD slot CDS-15S | 023942321736 | (02)0023942321736(37)05(91)893 | 50023942321731 |

## Logistic Information

|                                   |                    |
|-----------------------------------|--------------------|
| Pack Dimensions L x W x H         | 220 x 115 x 36 mm  |
| Pack Weight                       | 436                |
| Units per Pack                    | 1                  |
| Outer Carton Dimensions L x W x H | 235 x 200 x 140 mm |
| Outer Cartons Weight              | 2450               |
| Units per Outer Carton            | 5                  |
| Outer Cartons per Layer           | 20                 |
| Layers per Pallet                 | 7                  |
| Outer Boxes per pallet            | 140                |
| Units per Pallet                  | 700                |

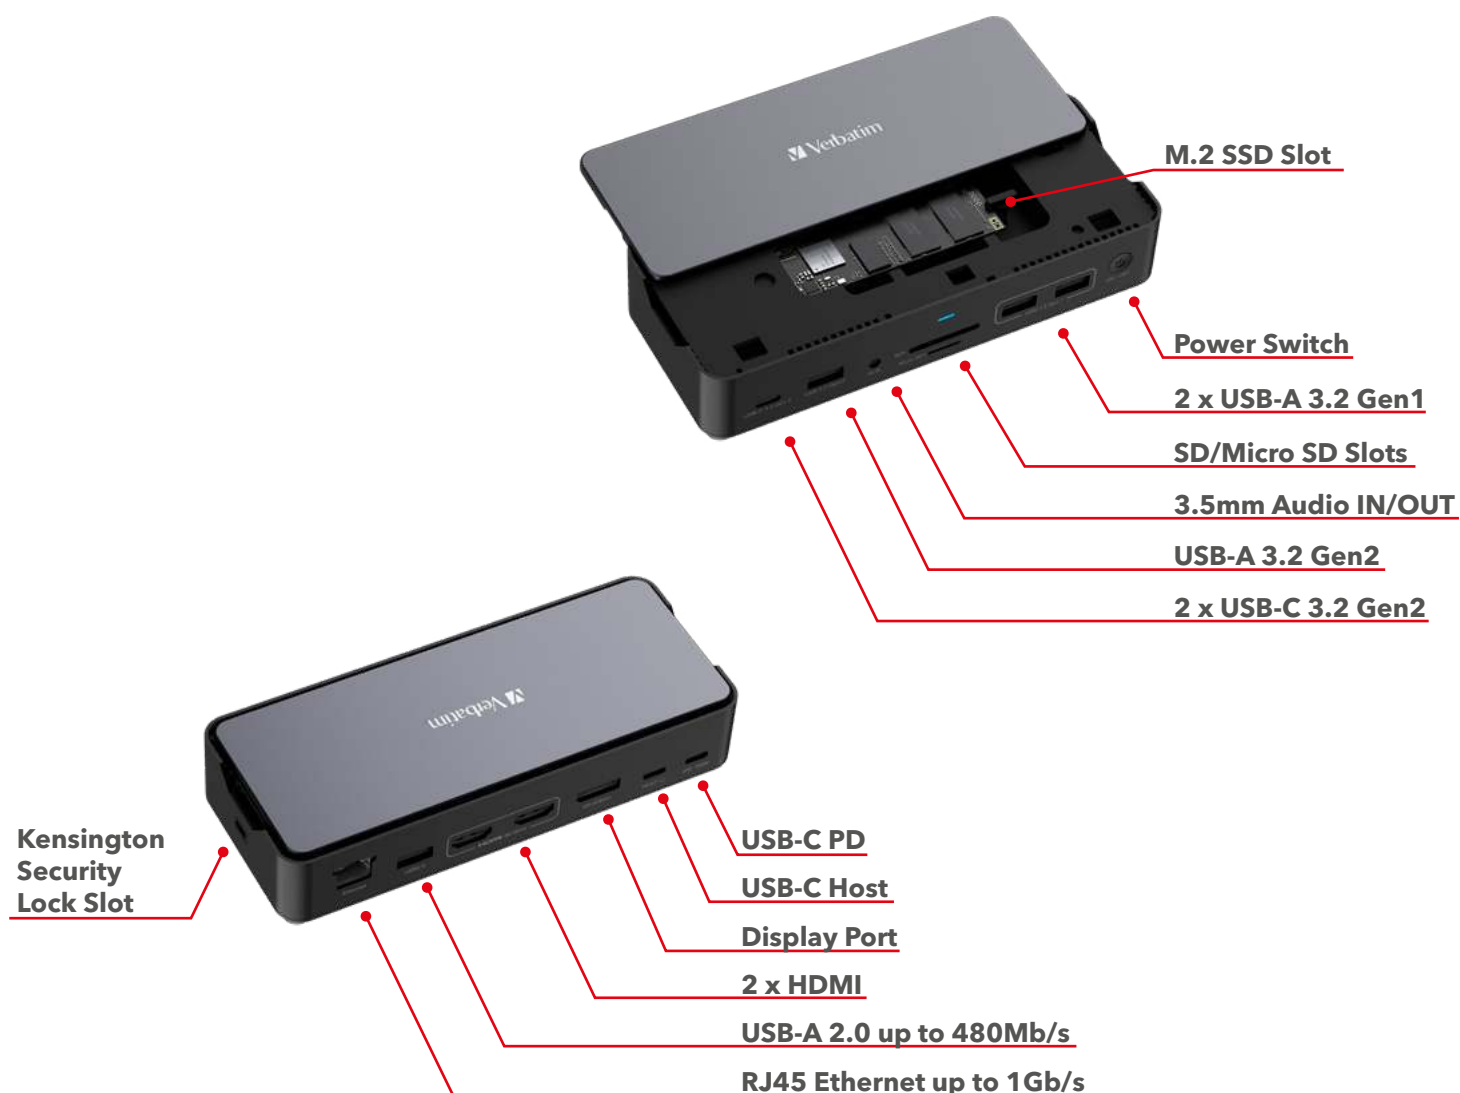

# USB-C™ Pro Docking Station 15 Port with SSD Slot

CDS-15S

**Verbatim**  
Technology you can trust



Front Angled



Front Angled Open



Back Angled



Connections



Angle Open Lit



Top Angled Open



Packaging 3D



Packaging Flat



Lifestyle 1



Lifestyle 2



Lifestyle 5



Lifestyle 4

## Pack Contents:

- USB-C Pro Docking Station
- USB-C to USB-C Cable
- Quick Start Guide

## System Requirements

- USB-C host port
- Windows 11, 10 or higher or  
Mac OS X 10.2 or higher

## Warranty

- 2 year limited warranty

For more information, please  
contact your key account manager

Publication date: 23-01-2024  
© 2024 Verbatim. All rights reserved.  
All brand names are registered trademarks of their respective owners.  
Unauthorized use strictly prohibited.  
Specifications are subject to change without prior notice.