


order number: H02050A0109

MICRO splice box incl. 4xSC adaptor, accessories

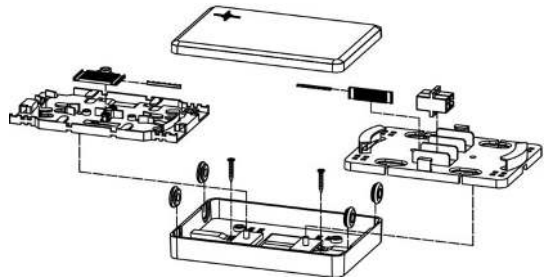

Technical Attributes	
Description	MICRO splice box incl. 4xSC adaptor, accessories
Adaptors	4xSC, ceramic
Dimensions	160 x 110 x 30 mm

Description of the Series/Product Category

Notice: The following information refer to the series/product category as a whole. Please see the specific data sheet for specific technical information of a particular product.

Fiber optic wall boxes and splice boxes by Telegärtner offer a maximum amount of ports using a minimum of space. Based on Telegärtner's decades of experience, they offer easy and reliable patching even in high density applications.

Performance Characteristics

Mechanical Characteristics	
Housing	thermoplastic PC-ABS, non halogen, flame retardant, pure white RAL 9010
Cable entries / Strain relief	sealing grommets for cable diameter max. 7,5 mm / cable ties
Protection class acc. To IEC 60529	IP 20
Panel piercings	for SC, E2000
Assembly	Wall mounting with common screws or in the cable duct using

	the fixing set
Dimension: Width	160
Dimension: Height	110
Dimension: Depth	30