



CablePort standard

professional desktop solutions

When needed, the lid is opened. After plugging in, the CablePort can be closed again and the connections are no longer visible. The cable outlet is covered by an integrated brush.

In addition to pre-configured desktop CablePorts various combinations of mains, AV and data interfaces can be realized in the desktop casing .

Quality
made
in
Germany
by Kindermann


- Installation depth 83 mm, corners with radius R5
- Power supply with 3-pin GST 18 plug
- Custom-made versions in other RAL colours can be supplied on demand!!

Available in 2 versions:

- Powder-coated, RAL 9006
- Stainless steel (brushed)



Features

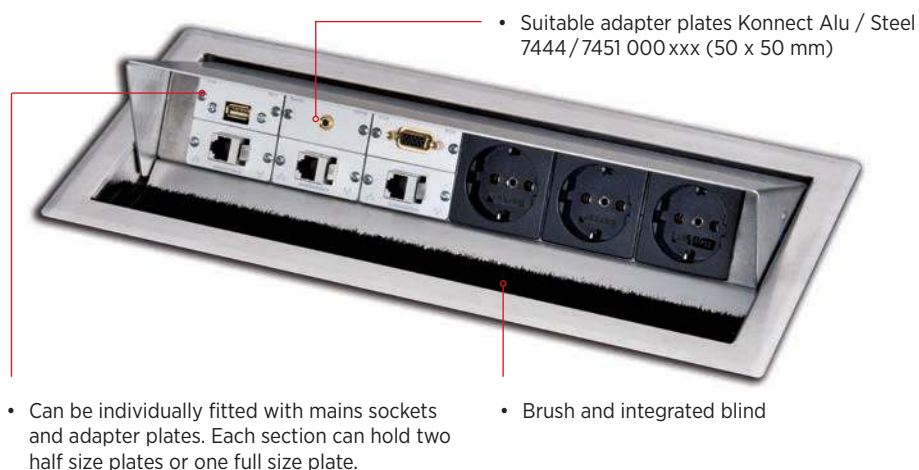

• Powder-coated/stainless steel



• Empty casing



• Closed



• Connections with cable and plug

CablePort standard



Version	4-fold			6-fold		
Pre-mounted with	1 x mains 3 x empty	2 x mains 2 x empty	3 x mains 1 x empty	2 x mains 4 x empty	3 x mains 3 x empty	4 x mains 2 x empty
Outer dimensions	287 x 180 mm			392 x 180 mm		
Cutout	262 x 160 mm			365 x 160 mm		
Powder-coated RAL 9006						
Ref. No.	7444 000 071	7444 000 072	7444 000 073	7444 000 082	7444 000 083	7444 000 084
Stainless steel, polished						
Ref. No.	7444 000 051	7444 000 052		7444 000 062	7444 000 063	7444 000 064

CablePort standard – pre-mounted



Version	2-fold	4-fold	6-fold
Pre-mounted with	1 x mains 1 x VGA 1 x HDMI 1 x audio (jack) 1 x cat-6 (RJ45) all with cable+plug	2 x mains 1 x VGA 1 x HDMI 1 x audio (jack) 1 x cat-6 (RJ45) all with cable+plug	3 x mains 1 x VGA 1 x HDMI 1 x audio (jack) 3 x cat-6 (RJ45) all with cable+plug
Outer dimensions	183 x 180 mm	287 x 180 mm	392 x 180 mm
Cutout	155 x 160 mm	262 x 160 mm	365 x 160 mm
Powder-coated RAL 9006			
Ref. No.	7444 000 013	7444 000 018	7444 000 019
Stainless steel, polished			
Ref. No.		7444 000 016	7444 000 017

CablePort basic

Open desktop connection system for integration in a desktop furniture, etc.

- Can also be mounted in vertical position
- Suitable adapter plates:
7444 000 xxx (50 x 50 mm)
- Installation depth 82 mm,
corners with radius 5
- Mains connection with
3-pinWieland plug GST 18



Version	4-fold	4-fold
Pre-mounted with	2 x mains 2 x empty	1 x mains 3 x empty
Outer dimensions	252 x 125 mm	252 x 125 mm
Cutout	240 x 107 mm	240 x 107 mm
Powder-coated RAL 9006		
Ref. No.	5301 170 000	5301 230 000