


Konnect flex 45 click

Easy click mounting on the front of the module holder

- Easy and quick installation possible without requiring any tools
- Multiple connectivity
- Improved design, interface for level integration, no screws visible
- Frontwise dismounting of the adapter plates (only CablePort standard²)
- Also suitable for cable channels 45 with min. 60 mm installation depth

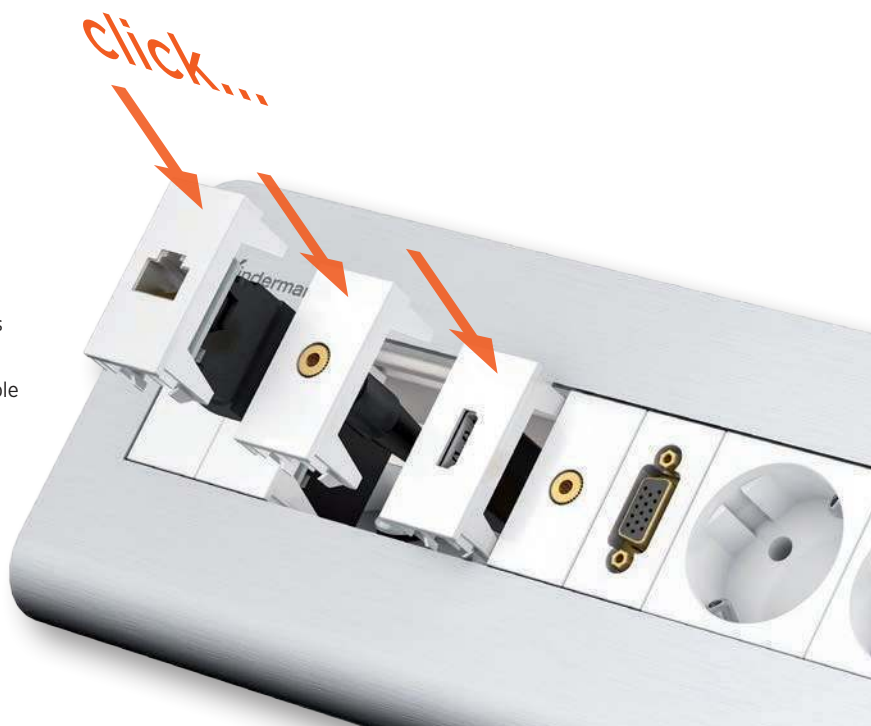

Konnect flex 45 click - Miscellaneous

Illustration	Model	Connection, rear side	Ref. No.
	Faceplate		7464 000 400
	Faceplate (full size plate)		7464 000 500
	Push-button, stainless steel, 48 VDC/125 mA	Screw connection	7464 000 441
	Push-button, stainless steel, 30 VDC/500 mA	Euro plug	7464 000 442
	Push-button, stainless steel with blue LED light ring, 48 VDC/500 mA	Euro plug	7464 000 443
	light ring 9 - 12 VDC, (1 x open/close)		
	Push-button, stainless steel with blue LED light ring, 48 VDC/500 mA	Cable+plug, 3 m with open ends	7464 000 448
	Faceplate with cable outlet	Opening: 8 mm	7464 000 446
	with metal reinforcement on the rear	Opening: 12 mm	7464 000 447
	Cable outlet socket incl. feed-through covers NEW! For 2 connection cables needs the space of 4 half size plates ideal for CablePort frame slide		7464 000 450
	Feed-through cover for SubD plug with screws, replaces a cover of 7464 000 450		7464 000 451
	Media control Neets SieRra		7464 000 590
	Media control Neets EcHo		7464 000 591
	Media control Neets EcHo Plus		7464 000 593
	NEB button field 8-fold needs the space of 4 half size plates		7464 000 592

Konnect flex 45 click

The adapter plates are available in 4 versions

- socket / socket, ca. 20 cm

- socket / 13/19-pin plug

- socket / plug, 100 cm
- socket / plug, 300 cm



Konnect flex 45 click - Digital

Illustration	Model	Connection, rear side	Ref. No.
	HDMI - High Speed with Ethernet	Cable+plug	7464 000 542
		Cable+plug, 1 m	7464 000 842
		Cable+plug, 3 m	7464 000 942
	DVI-I (24 + 5-pin)	Cable+plug	7464 000 502
		Cable+plug, 3 m	7464 000 902
	DisplayPort	Cable+plug	7464 000 588
		Cable+plug, 1 m	7464 000 888
		Cable+plug, 3 m	7464 000 988

Konnect flex 45 click - Digital to 19-pin system cable

Illustration	Model	Connection, rear side	Ref. No.
	HDMI to 19-pin	Cable+plug	7464 000 561
		Cable+plug, 3 m	7464 000 961

Konnect flex 45 click - VGA/Video

Illustration	Model	Connection, rear side	Ref. No.
	VGA (HD15)	Cable+plug	7464 000 501
		Cable+plug, 1 m	7464 000 801
		Cable+plug, 3 m	7464 000 901

Konnect flex 45 click - Analogue to 13-pin system cable

Illustration	Model	Connection, rear side	Ref. No.
	VGA (HD15 fully configured) to 13-pin	Cable+plug	7464 000 552
		Cable+plug, 3 m	7464 000 952



Konnect flex 45 click - Audio

Illustration	Model	Connection, rear side	Ref. No.
	Audio L/R (cinch)	Cable+plug Cable+plug, 3 m	7464 000 510 7464 000 910
	Audio jack (3.5 mm stereo)	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 511 7464 000 811 7464 000 911
	XLR socket, 3-pin (full size plate) Neutrik socket	Soldering	7464 000 412

Konnect flex 45 click - Daten/Netzwerk

Illustration	Model	Connection, rear side	Ref. No.
	USB 2.0 Type A / Type A	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 522 7464 000 822 7464 000 922
	USB 3.0 Type A / Type A	Cable+plug Cable+plug, 3 m	7464 000 529 7464 000 828

Konnect flex 45 click - Daten/Network

Illustration	Model	Connection, rear side	Ref. No.
	USB 2.0 B-socket/A-socket	Cable+plug	7464 000 525
	NEW! USB 2.0 active hub B-socket/A-socket with integrated repeater for max. 5 m cable length	Cable+plug	7464 000 528
	USB 2.0 B-socket/B-plug	Cable+plug, 1 m	7464 000 829
	Cat-6 (RJ45) Cat-6a transmission properties are compatible with the ANSI/TIA 568 C.2 standard 500 MHz according to ISO/IEC 60603-7-51, 11801 AMD2:2010-04 Suitable for outer diameter AWG 26/7 - 22/1 LSA clamps colour-coded according to EIA/TIA 568 A&B	Cut+clamp	7464 000 423
	Cat-6 (RJ45)	Gender changer (1:1)	7464 000 523
	Cat-6 (RJ45) BTR Netcom Fully protected interface from Metz connect RJ45 cable coupling cat-6 class E 10 GBit Ethernet (IEEE 802.3an) Compliance of class E according to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09 Suitable for Power over Ethernet (PoE, PoE plus and UPoE)	Gender changer (1:1)	7464 000 526
	NEW! Cat-6 (RJ45)	Cable+plug Cable+plug, 1 m Cable+plug, 3 m	7464 000 527 7464 000 827 7464 000 927
	Cat-7 (GG45) Nexans Certified up to 1000 MHz, downward compatible with RJ45 (Cat-6)	Cut+clamp	7464 000 424
	Cat-6/audio jack (3.5 mm stereo)	Cable+plug	7464 000 587