




Delock PCI Express x1 to M.2 Key M Adapter

Description

This adapter by Delock enables the connection of an **M.2 SSD in 2280, 2260, 2242 and 2230 format**. The data transmission occurs directly via the PCI Express slot.

Ideal test equipment

Due to the PCIe male connector and the direct installation of the SSD on the board, without enclosure, the Delock adapter is **most suitable as test equipment**.

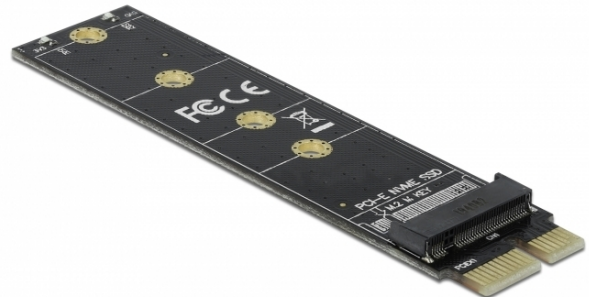M.2 NVMe

Specification

- Connectors:
 - 1 x PCI Express x1, V4.0
 - 1 x 67 pin M.2 key M slot
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe (NVMe)
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- 2 x LED indicator for power and activity
- Bootable
- Dimensions (LxWxH): ca. 100 x 24 x 6 mm
- Plug & Play

System requirements

- Linux Kernel 4.6.4 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- Adapter M.2
- 2 x thermal pad
- M.2 mounting material
- Screwdriver
- User manual

Item no. 64105

EAN: 4043619641055



Country of origin: China

Package: • Retail Box





Images





General	
Function:	NVM Express (NVMe)
Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Linux Kernel 4.6.4 or above
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	1 x 67 pin M.2 key M slot
	1 x PCI Express x1, V4.0