

M.2 2242 Key B+M Controller to 4 x SATA with 1 m cable

Description

This M.2 to SATA controller by Delock expands the system by **four SATA ports**. Different devices such as SSDs, hard drives, DVD-drives etc. can be connected to the controller.



Item no. 64260

EAN: 4043619642601

Country of origin: China

Package: Box

Technical details

- Connectors:
 - 1 x M.2 key B+M male
 - 1 x SFF-8087 female
- Connection cables:
 - 1 x SFF-8087 male
 - 4 x SATA 6 Gb/s 7 pin receptacle
- Chipset: JMicron JMB585
- Interface: PCIe
- Form factor: M.2 2242
- Suitable for M.2 slot with key M or B based on PCIe
- 4 x LED indicator for power and access
- Data transfer rate up to 6 Gb/s
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable
- Dimensions (LxWxH): ca. 42 x 22 x 21 mm


System requirements

- Linux Kernel 6.5 or above
- Windows 10/10-64/11
- A free M.2 key M or key B slot

Package content

- M.2 to SATA controller
- 1 x Cable SFF-8087 male to 4 x SATA receptacle, length ca. 1 m
- Screw
- User manual

Images

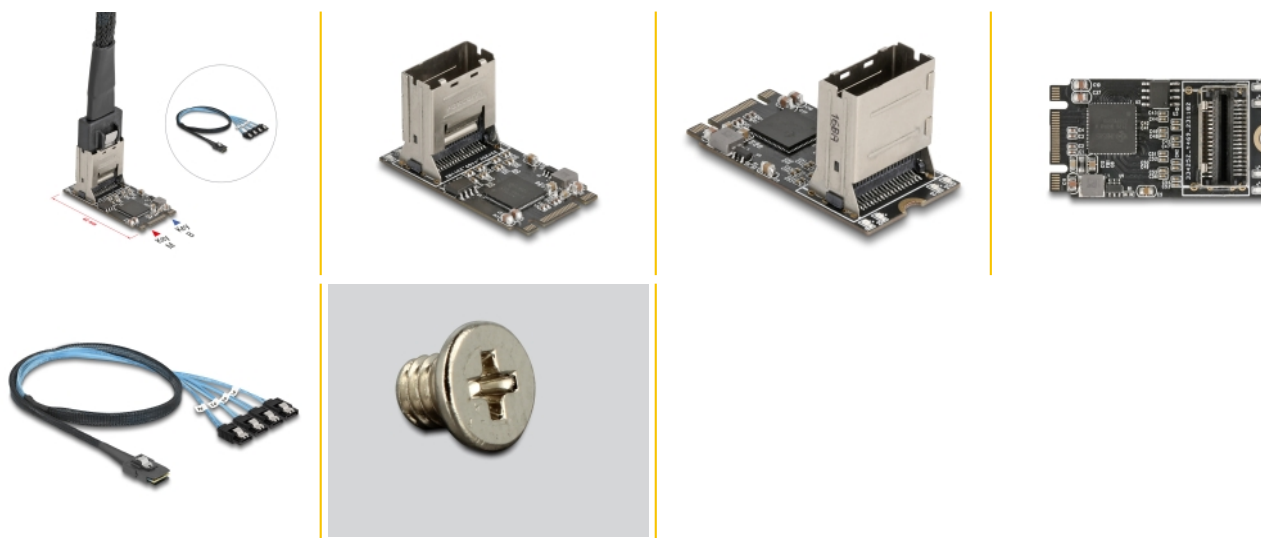

General

Form factor:	M.2 2242
Function:	Hot Swap bootable TRIM S.M.A.R.T.
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Linux Kernel 6.5 or above
LED indicator:	4 x
Slot:	PCIe

Interface

Connector 1:	1 x M.2 key B+M male
Connector 2:	4 x SATA 6 Gb/s 7 pin female

Technical characteristics

Chipset:	JMicron JMB585
Data transfer rate:	6 Gb/s

Physical characteristics

Length:	42 mm
Width:	22 mm
Height:	21 mm

Manufacturer information

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de