



Delock Sub-D15 female to Terminal Block Adapter with Enclosure

Description


This terminal block adapter by Delock can be used to connect bare wires. Thus the adapter is not only convenient for special industry applications, but also for the hobby area, e.g. railway modelling.

Protection by enclosure

The plastic enclosure protects the PCB from dirt and damage.

Strain relief

The screw-on strain relief fixes the cable in the enclosure.

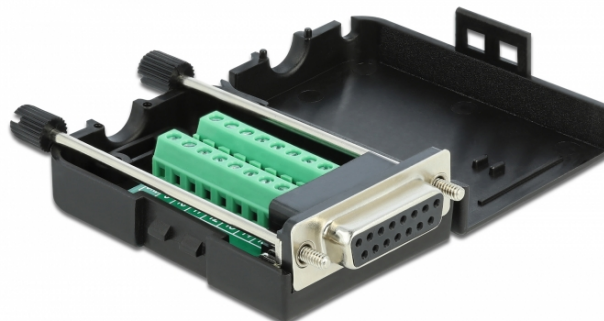

Specification

- Connectors:
 - 1 x serial Sub-D15 female (2 rows) with screws
 - 1 x 16 pin terminal block
- Pin assignment: 1:1
- Pitch: 3.81 mm
- Useable for a cable gauge from 26 to 18 AWG
- Operating temperature: -20 °C ~ 105 °C
- Dimensions (LxWxH): ca. 78 x 42 x 21 mm

System requirements

- A free Sub-D15 male port

Package content

- Adapter
- 1 x strain relief
- 2 x locking screws

Item no. 66567

EAN: 4043619665679

Country of origin: CHINA

Package: • Zip poly bag

Images





Interface	
Connector 1:	1 x serial Sub-D 15 pin female
Connector 2:	1 x 16 pin terminal block
Technical characteristics	
Operating temperature:	-20 °C ~ 105 °C
Physical characteristics	
Pitch distance:	3.81 mm
Conductor gauge:	26 - 18 AWG
Length:	78 mm
Width:	42 mm
Height:	21 mm