



Delock Adapter cable USB Type-A to Serial RS-232 RJ12 with ESD protection Leadshine 2 m

Description

This USB to serial RS-232 RJ12 adapter cable by Delock is suitable with the ProTuner software for configuration, control, monitoring etc. of the servo and stepper motors by Leadshine.

Compatible Devices:

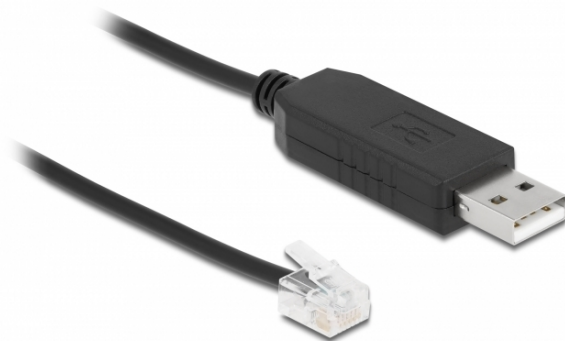
Stepper motors:

DM432C, DM442, DM556, DM856 3DM683 AM882

DM1182 DM2282

Servomotors:

DCS810, DCS810S, ACS306, ACS606, ACS806

**2 m**

Specification

- Connectors:
 - 1 x USB 2.0 Type-A male
 - 1 x Serial RS-232 RJ12 plug
- Chipset: FTDI FT231X
- Plug & Play
- ESD protection:
- FIFO: 512 Byte - TX
- FIFO: 512 Byte - RX
- Compatible with USB 3.0, USB 2.0, and USB 1.1 full speed 12 Mbps
- Data transfer rate up to 230.4 Kb/s
- Signals: RXD(3), GND(4), TXD(5)
- ESD protection IEC 61000-4-2
- HCP & VCP: ± 4 kV
- Air Discharge: ± 8 kV
- Contact Discharge: ± 4 kV
- Colour: black
- Cable length incl. connectors: ca. 2.0 m
- Suitable for various devices by Leadshine

System requirements

- Windows 8.1/8.1-64/10/10-64
- PC or laptop with a free USB Type-A port

Package content

- Adapter cable USB 2.0 Type-A to RS-232 RJ12

Item no. 66737

EAN: 4043619667376

Country of origin: China

Package: • Zip poly bag

Images





General

Specification: RS-232 (EIA / TIA)
USB 2.0

Supported operating system: Windows 8.1 32-bit
Windows 8.1 64-bit
Windows 10 32-bit
Windows 10 64-bit

Interface

Connector 1: 1 x USB 2.0 Type-A male

Connector 2: 1 x RJ12 plug

Technical characteristics

Chipset: FTDI FT231XS

Data transfer rate: bis zu 230,4 Kbps

FIFO: 2 x 512 Byte

Signal transmission: TxD, RxD und GND

UART: USB to serial UART

Physical characteristics

Cable length incl. connector: 2 m

Colour: black

Overvoltage protection: ± 8 kV EN / IEC 61000-4-2 Air Gap Discharge
 ± 4 kV EN / IEC 61000-4-2 Contact Discharge
 ± 4 kV EN / IEC 61000-4-2 VCP & HCP