




## Delock D-Sub HD 44 pin male to Terminal Block for DIN rail

### Description

This terminal block adapter by Delock can be used to connect wires with stripped ends.

### DIN rail mounting

With the clips included in the delivery content, the adapter can be attached to a 15 mm or 35 mm wide DIN rail.

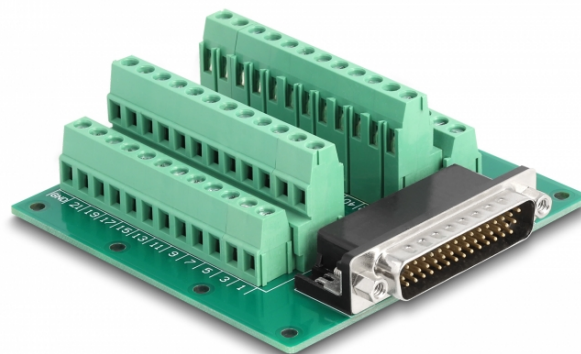

### Specification

- Connectors:
  - 1 x D-Sub HD 44 pin male
  - 1 x 45 pin terminal block
- Pin assignment: 1:1
- Pitch: 5.00 mm
- Useable for a cable gauge from 24 to 12 AWG
- DIN rail mounting: 15 mm and 35 mm
- Operating temperature: -40 °C ~ 100 °C
- Dimensions (LxWxH): ca. 86 x 84 x 30 mm

### System requirements

- A free D-Sub HD 44 pin female
- 15 mm or 35 mm DIN rail

### Package content

- Adapter
- 2 x DIN rail clip
- 5 x screws




### Item no. 66915

EAN: 4043619669158

Country of origin: China

Package: White Box

### Images





|                           |                                    |
|---------------------------|------------------------------------|
| General                   |                                    |
| Mounting type:            | DIN rail mounting: 15 mm and 35 mm |
| Interface                 |                                    |
| Connector 1:              | 1 x D-Sub HD 44 pin male           |
| Connector 2:              | 1 x 45 pin terminal block          |
| Technical characteristics |                                    |
| Operating temperature:    | -40 °C ~ 100 °C                    |
| Physical characteristics  |                                    |
| Pitch distance:           | 5.00 mm                            |
| Conductor gauge:          | 24 to 12 AWG                       |
| Length:                   | 86 mm                              |
| Width:                    | 84 mm                              |
| Height:                   | 30 mm                              |