


# Delock Cable Optical Fibre LC-APC to LC-APC Simplex Singlemode OS2 0.5 m

## Description

This fibre optic cable by Delock can be used to connect various network devices, e.g. an FTTH house interconnection point with a fibre optic modem.

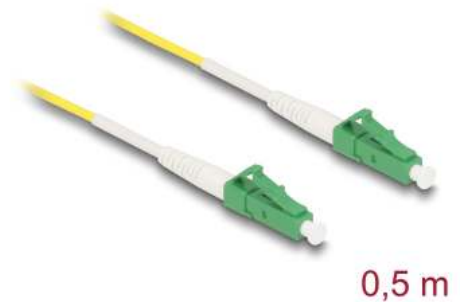

**Item no. 83219**

EAN: 4043619832194

Country of origin: China

Package: Zip poly bag

## Technical details

- Connectors:  
1 x LC-APC Simplex  
1 x LC-APC Simplex
- APC 8°
- Ceramic ferrule with dust protection
- Singlemode OS2 cable G657.A2
- Fibre: 9/125 µm
- Insertion loss < 0.15 dB
- Return loss > 60 dB
- Smallest bending radius: 7.5 mm
- Cable diameter: ca. 2.0 mm
- LS0H (halogen-free)
- Operating temperature: -20 °C ~ 70 °C
- Colour: yellow
- Cable length: ca. 0.5 m

## Package content

- Optical fiber cable

---

## Images



## General

|                |     |
|----------------|-----|
| Specification: | OS2 |
|----------------|-----|

## Interface

|              |                     |
|--------------|---------------------|
| Connector 1: | 1 x LC Simplex male |
| Connector 2: | 1 x LC Simplex male |

## Technical characteristics

|                        |                |
|------------------------|----------------|
| Operating temperature: | -20 °C ~ 70 °C |
|------------------------|----------------|

## Physical characteristics

|                               |                     |
|-------------------------------|---------------------|
| Cable colour:                 | yellow              |
| Cable length incl. connector: | 0.5 m               |
| Smallest bending radius:      | 7.5 mm              |
| Cable jacket material:        | LS0H (halogen-free) |