




Delock Kabel mini Displayport 1.1 Stecker > HDMI-A Stecker 0,5 m

Description

This cable by Delock can be used to connect a display with an HDMI port to a PC or a laptop with mini Displayport interface.

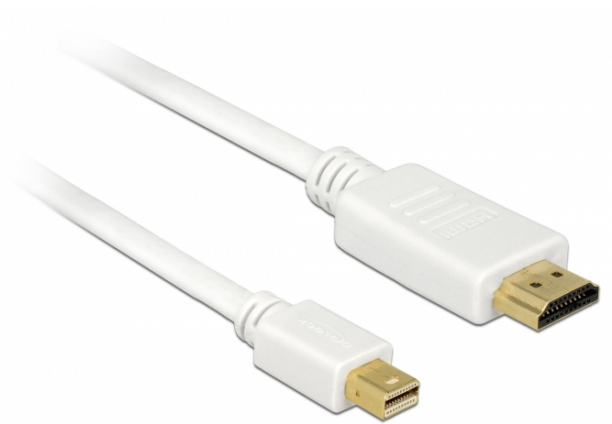

ca. 0,5 m

Specification

- Connectors:
 - 1 x mini Displayport 20 pin male >
 - 1 x High Speed HDMI-A 19 pin male
- Chipset: Parade PS8121E
- Displayport 1.1a and High Speed HDMI specification
- Passive cable (level shifter), suitable only for graphics cards with DP++ output
- Signal direction: mini Displayport input > HDMI output
- Cable gauge: 32 AWG
- Cable diameter: ca. 5.5 mm
- Twisted-pair cabling
- Copper conductor
- Gold-plated connectors
- Triple shielded cable
- Transfer of audio and video signals
- Data transfer rate up to 10.2 Gb/s
- Resolution up to 1920 x 1200 @ 60 Hz (depending on the system and the connected hardware)
- Colour: white
- Length incl. connectors: ca. 0.5 m

System requirements

- One free mini Displayport DP++ female

Package content

- Mini Displayport to HDMI cable

Item no. 83993

EAN: 4043619839933

Country of origin: China

Package: Poly bag



Images





General	
Specification:	standard Displayport 1.1 High Speed HDMI
Interface	
connector:	standard 1 x mini Displayport 20 pin male 1 x High Speed HDMI-A 19 pin male
Technical characteristics	
Data transfer rate:	standard 10.2 Gb/s
Maximum screen resolution:	standard 1920 x 1200 @ 60 Hz
Physical characteristics	
Cable colour:	standard white
Cable diameter:	standard 5.5 mm
Cable length incl. connector:	standard 0.5 m
Connector finishing:	standard gold-plated
Pin finishing:	standard gold-plated
Conductor material:	standard copper
Conductor gauge:	standard 32 AWG
Shielding:	standard triple