




Delock PoweredUSB cable male 12 V > 2 x 4 pin male 3 m for POS printers and terminals

Description

This PoweredUSB cable by Delock can be used to connect a device with 2 x 4 pin port to a PC or hub with PoweredUSB 12 V port. It is suitable for connecting various POS devices such as printers and terminals, e.g. by IBM or other manufacturers. The cable is used both for data transmission and for power supply of the connected device.

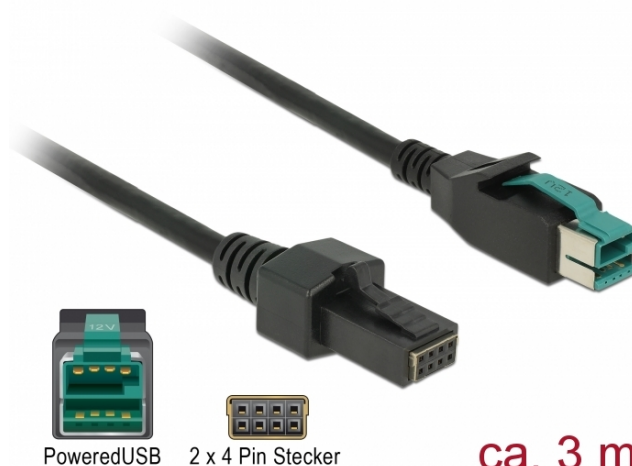

PoweredUSB

2 x 4 Pin Stecker

ca. 3 m

Specification

- Connectors:
 - 1 x PoweredUSB male 12 V >
 - 1 x Male 2 x 4 pin
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge:
 - 26 AWG data line
 - 20 AWG power line
- Cable diameter: ca. 6.5 mm
- Cable double shielded
- Data transfer rate up to 480 Mbps
- Colour: black
- Length incl. connectors (L): ca. 3 m

System requirements

- PC or hub with a free PoweredUSB 12 V female port
- Device with a free 2 x 4 pin female port

Package content

- PoweredUSB cable

Item no. 85484

EAN: 4043619854844

Country of origin: China

Package: Poly bag



Images

PoweredUSB
12 V

2 x 4 Pin Stecker



General	
Specification:	PoweredUSB
Interface	
Connector 1:	1 x PoweredUSB male 12 V
Connector 2:	1 x male 2 x 4 pin
Technical characteristics	
Data transfer rate:	USB 2.0 up to 480 Mb/s
Voltage:	12 V
Physical characteristics	
Cable diameter:	6.5 mm
Conductor gauge:	26 AWG data line
	20 AWG power line
Shielding:	double
Length:	3 m
Colour:	black