




Delock PCI Express Card to 1 x internal USB 3.2 Gen 2 key A 20 pin female

Description

This PCI Express card by Delock expands the PC by one internal **USB 3.2 key A 20 pin female** port. Various cables can be connected to the card, to provide either one USB Type-C™ or one USB Type-A interface.

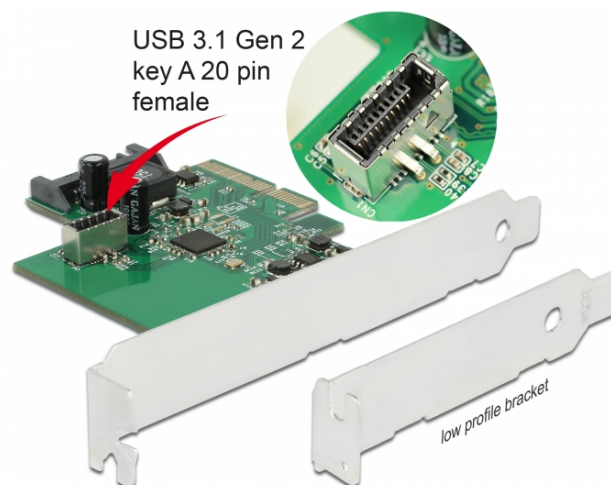

Specification

- Connectors:
internal:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) key A 20 pin female
 - 1 x SATA 15 pin power plug
 - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

System requirements

- Linux Kernel 4.4 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- User manual

Item no. 89029


EAN: 4043619890293

Country of origin: Taiwan, Republic of China

Package: • Retail Box



Images





General	
Specification:	SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)
Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Linux Kernel 4.4 or above
Interface	
Internal:	1 x PCI Express x4, V3.0
	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) key A 20 pin female
	1 x SATA 15 pin power plug
Technical characteristics	
Chipset:	Asmedia ASM3142
Data transfer rate:	10 Gbps
Physical characteristics	
Slot bracket:	low profile
	standard