




Delock PCI Express Card > 4 x Serial with voltage supply

Description

The Delock PCI Express card expands a PC by four external serial ports. Connected devices can be optionally supplied with a voltage of 5 V or 12 V. Included are thumbscrews for the individual serial ports, so either serial devices with screws or with nuts can be connected to the ports. By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

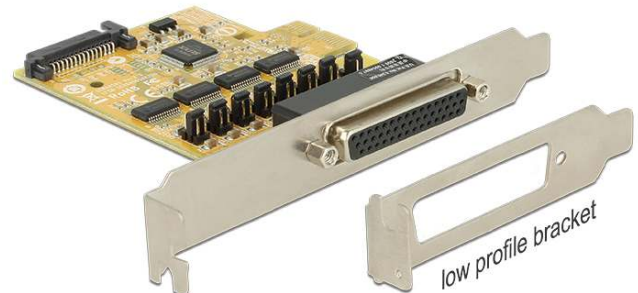

Specification

- Connector:
 - external:
 - 1 x DB44 female
 - connecting cable: DB44 male > 4 x serial RS-232 DB9 male
 - internal:
 - 1 x PCI Express x1, V2.0
 - 1 x SATA 15 pin male
- Chipset: SUN2410
- Data transfer rate up to 115.2 Kb/s
- FIFO: 128 byte
- Compatible with 16C950 UART
- 5 V or 12 V can be set individually for each port through the jumper (pin 1 or 9)
- Signals: DCD/12V/5V, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI/12V/5V
- ±15 kV ESD protection for all serial signals meets IEC1000-4-2 standard

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot
- Power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- 1 x serial connecting cable (ca. 30 cm)
- 8 x thumbscrew
- Driver CD
- User manual

Item No. 89447

EAN: 4043619894475

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



**General**

Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8 32-bit
	Windows 8 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit

Interface

External:	4 x serial RS-232 DB9 male
Internal:	1 x SATA 15 pin male
	1 x PCI Express x1, V2.0

Technical characteristics

Data transfer rate:	115.2 Kb/s
FIFO:	128 byte
Voltage:	5 V or 12 V can be set individually for each port through the jumper (pin 1 or 9)
UART:	16C950

Physical characteristics

Slot bracket:	low profile
	standard