




## Delock PCI Card > 1 x Serial RS-232

### Description

This PCI card by Delock expands a PC by one external serial port. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile bracket, the PCI card can be also installed into a Mini-PC.

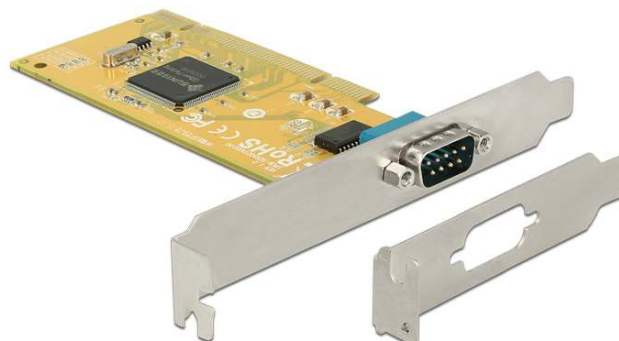

### Specification

- Connectors:
  - external: 1 x serial RS-232 DB9 male
  - internal: 1 x 32-Bit PCI standard 3.0
- Chipset: SUN1989
- Compliance with PCI 33 MHz Ver. 3.0/2.3/2.2./2.1 specification
- Supports both 64-bit & 32-bit PCI bus slots and 3.3 V & 5 V power
- Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
- $\pm 2$  kV ESD protection for all serial signals
- Data transfer rate up to 115.2 Kb/s
- FIFO: 128 byte
- Compatible with 16C950 UART
- Operating temperature: 0 °C ~ 60 °C
- Humidity: 5 ~ 95 %

### System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38
- PC with one free PCI slot

### Package content

- PCI card
- 1 x low profile bracket
- Driver CD
- User manual

Item no. 89592



EAN: 4043619895922

Country of origin: China

Package: Retail Box



### Images





## General

|                             |                                                                                                                                                                         |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported operating system: | <b>standard</b><br>Linux ex Kernel 2.6.38<br>Windows 7 32-bit<br>Windows 7 64-bit<br>Windows 8.1 32-bit<br>Windows 8.1 64-bit<br>Windows 10 32-bit<br>Windows 10 64-bit |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|             |                                                  |
|-------------|--------------------------------------------------|
| Protection: | <b>standard</b><br>ESD (Electrostatic Discharge) |
|-------------|--------------------------------------------------|

## Interface

|           |                                               |
|-----------|-----------------------------------------------|
| External: | <b>standard</b><br>1 x serial RS-232 DB9 male |
|-----------|-----------------------------------------------|

|           |                                             |
|-----------|---------------------------------------------|
| Internal: | <b>standard</b><br>1 x PCI V3.0/2.3/2.2/2.1 |
|-----------|---------------------------------------------|

## Technical characteristics

|          |                          |
|----------|--------------------------|
| Chipset: | <b>standard</b><br>SUNIX |
|----------|--------------------------|

|                     |                                     |
|---------------------|-------------------------------------|
| Data transfer rate: | <b>standard</b><br>up to 115,2 Kb/s |
|---------------------|-------------------------------------|

|       |                             |
|-------|-----------------------------|
| FIFO: | <b>standard</b><br>128 byte |
|-------|-----------------------------|

|                        |                                 |
|------------------------|---------------------------------|
| Operating temperature: | <b>standard</b><br>0 °C ~ 60 °C |
|------------------------|---------------------------------|

|           |                             |
|-----------|-----------------------------|
| Humidity: | <b>standard</b><br>5 ~ 95 % |
|-----------|-----------------------------|

|       |                           |
|-------|---------------------------|
| UART: | <b>standard</b><br>16C950 |
|-------|---------------------------|

## Physical characteristics

|               |                                            |
|---------------|--------------------------------------------|
| Slot bracket: | <b>standard</b><br>low profile<br>standard |
|---------------|--------------------------------------------|

|         |                           |
|---------|---------------------------|
| Length: | <b>standard</b><br>120 mm |
|---------|---------------------------|

|        |                          |
|--------|--------------------------|
| Width: | <b>standard</b><br>51 mm |
|--------|--------------------------|

|         |                           |
|---------|---------------------------|
| Height: | <b>standard</b><br>6.6 mm |
|---------|---------------------------|