




Delock PCI Express Card > 2 x Serial RS-232

Description

The PCI Express card by Delock expands a PC by two external serial RS-232 ports. Different devices such as scanner, protocol converter, IoT devices etc. can be connected to this card. By using the included low profile brackets, the PCI Express card can be also installed into a Mini-PC.

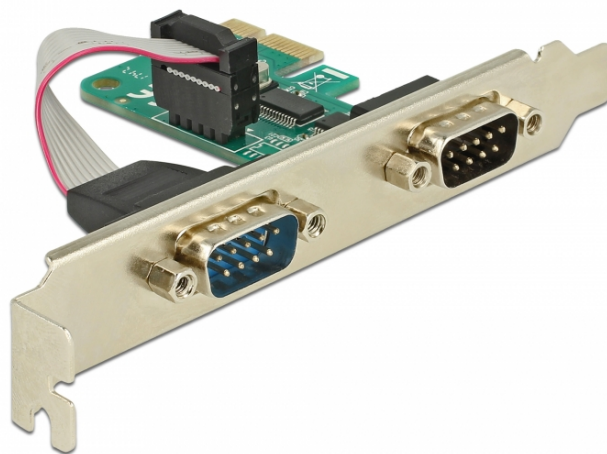

Specification

- Connectors:
 - external: 2 x serial RS-232 DB9 male
 - internal: 1 x PCI Express x1, V1.1
- Chipset: WCH CH382L
- Compatible with 16C550 UART
- Buffer: 256 byte on each port
- Databits: 5, 6, 7, 8
- Stop bits: 1, 2
- Parity: even, odd, none, mark, space
- Flow control: none, hardware RTS / CTS, software XON / XOFF

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, ex Linux Kernel 4.15
- PC with one free PCI Express slot

Package content

- PCI Express card
- 2 x low profile bracket
- Driver CD
- User manual

Item no. 89918



EAN: 4043619899180

Country of origin: China

Package: Retail Box



Images





General	
Form factor:	Standard
Specification:	RS-232
	PCIe 1.1
Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	ex Linux Kernel 4.15
Slot:	PCIe
Interface	
External:	2 x serial RS-232 DB9 male
Internal:	1 x PCI Express x1, V1.1
Technical characteristics	
Chipset:	WCH CH382L
Data transfer rate:	2 x up to 230,4 Kbps
UART:	16C550
Physical characteristics	
Colour:	green