




## Delock Riser Card PCI Express x1 to 1 x PCI 32 Bit 5 V Slot

### Description

The PCI Express riser card by Delock enables the connection of one **PCI card** via one PCI Express interface. The **recess in the slot bracket** allows an external connection of e.g. cables to the built-in PCI card in the computer case.

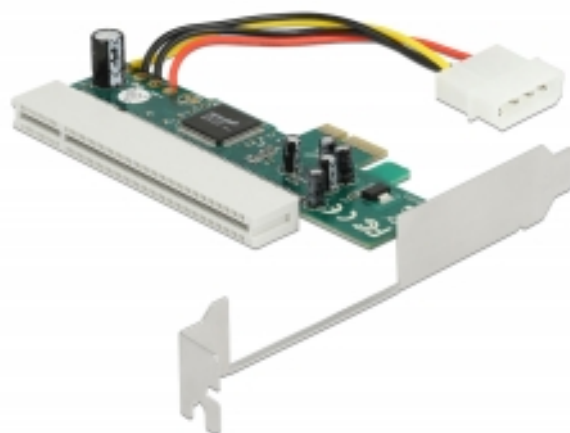

### Specification

- Connectors:
  - 1 x PCI Express x1 >
  - 1 x 32-Bit PCI
  - 1 x power connector 4 pin Molex male
- Chipset: Asmedia ASM1083
- Bootable

### System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express slot

### Package content

- PCIe riser card
- User manual


### Item no. 90062

EAN: 4043619900626

Country of origin: China

Package: Box

### Images

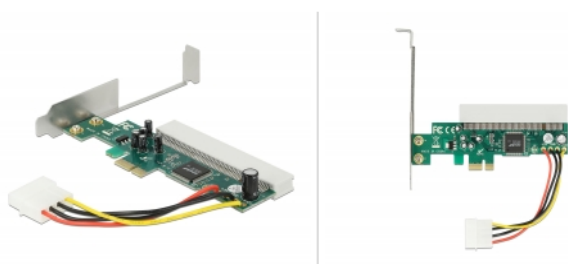



| General                   |                                      |
|---------------------------|--------------------------------------|
| Function:                 | bootable                             |
| Interface                 |                                      |
| Connector 1:              | 1 x PCI Express x1                   |
| Connector 2:              | 1 x 32-Bit PCI                       |
| connector 3:              | 1 x power connector 4 pin Molex male |
| Technical characteristics |                                      |
| Chipset:                  | Asmedia ASM1083                      |