




Delock PCI Express x4 Card to 1 x external USB Type-C™ female + 2 x external USB Type-A female SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) + 1 x internal USB 3.0 Pin Header

Description

This PCI Express card by Delock expands the PC by **three external USB 3.2 ports** as well as **one internal pin header**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

Data transfer rate 5 Gbps internal and 10 Gbps external

The card allows a data transfer rate of **10 Gbps** on the external ports, as well as 5 Gbps on the internal pin header.

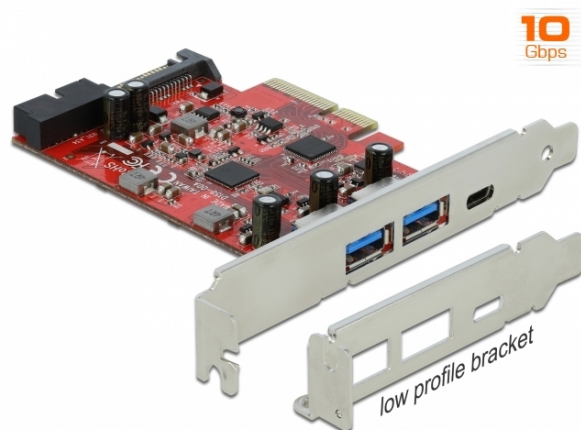

Specification

- Connectors:
external:
1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
internal:
1 x 19 pin USB 3.0 pin header male
1 x SATA 15 pin power connector
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142, Genesys Logic GL3590
- Data transfer rate up to:
SuperSpeed USB 10 Gbps,
SuperSpeed USB 5 Gbps,
Hi-Speed 480 Mbps,
Full-Speed 12 Mbps,
Low-Speed 1.5 Mbps
- Bootable
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port:
USB Type-C™: max. 15 watt (5 V / 3 A)
USB Type-A: max. 10 watt (5 V / 2 A)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports UASP

System requirements

- Linux Kernel 3.12 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- User manual

Item no. 90492

EAN: 4043619904921

Country of origin: Taiwan, Republic of China

Package: • Retail Box





Images





General	
Form factor:	Low Profile
Function:	bootable
Supported operating system:	Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.12 or above
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female 2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
Technical characteristics	
Chipset:	Asmedia ASM3142 Genesys Logic GL3590
Data transfer rate:	10 Gbps
Physical characteristics	
Slot bracket:	low profile standard