




Delock PCI Express x1 Card to 2 x external SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female

Description

This PCI Express card by Delock expands the PC by **two external USB-C™ ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

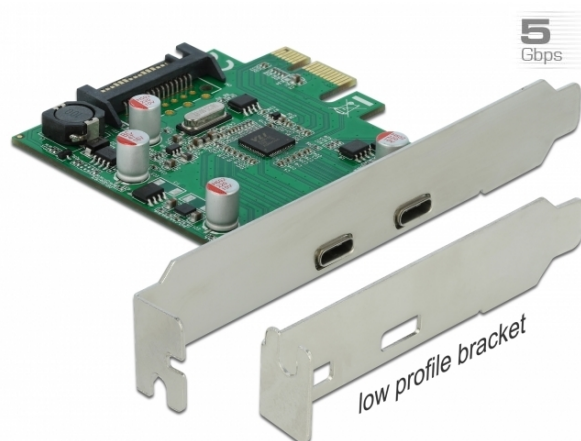

Specification

- Connectors:
 - external:
 - 2 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female
 - internal:
 - 1 x SATA 15 pin power connector
 - 1 x PCI Express x1, V2.0
- Chipset: VIA VL805
- Data transfer rate up to:
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply mandatory via SATA power connector
- Electrical power per port: max. 7 watt (5 V / 1.4 A)

System requirements

- Linux Kernel 3.16 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express slot
- A free SATA power plug

Package content

- PCI Express card
- Low profile bracket
- User manual

Item no. 90493

EAN: 4043619904938

Country of origin: China

Package: • Retail Box

Images





General	
Form factor:	Low Profile
Supported operating system:	Linux Kernel 3.16 or above
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
Interface	
External:	2 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female
Internal:	1 x PCI Express x1, V2.0
	1 x SATA 15 pin power connector
Technical characteristics	
Chipset:	VIA VL805
Data transfer rate:	5 Gbps
Physical characteristics	
Slot bracket:	low profile
	standard