

Gaming Series

Power Supplies 450W/ 550W/ 650W semi modular/ 750W/ 850W

The successful Gaming series combines high performance with a low noise level and high efficiency. The new DC/DC technology guarantees for increased efficiency and a maximum tension stability even during excessive gaming. Thanks to this high efficiency and the associated 80+ BRONZE certification high electricity costs are now a thing of the past. Four integrated safety circuits provide for an all-time safe operation and the sleeved main cable harness ensures order in the PC case.




Product Features

- Extremely silent cooling: large 120mm fan
- Excellent air flow design for a better heat dissipation
- Full safety design:
 - OVP (Over Voltage Protection)
 - UVP (Under Voltage Protection)
 - SCP (Short Circuit Protection)
 - OLP (Over Load Protection)
- Low stand-by consumption
- High energy efficiency: 80+ BRONZE® certified (complies with ErP2014 norm)
- Active-PFC

*XN225 | XP650R10 has a 140mm fan and is semi-modular

Technical Data | 450W

	AC INPUT	DC OUTPUT	
XP450R1	200V - 240V	+ 3.3V	20.0A
		+ 5.0V	14.0A
		+ 12.0V	33.0A
		- 12.0V	0.5A
		+ 5.0VSB	2.5A
Efficiencies		20%	> 85%
		50%	> 88%
		100%	> 85%
Noise Level		20%	~ 16 db(A)
		50%	~ 17 db(A)
		100%	~ 23 db(A)

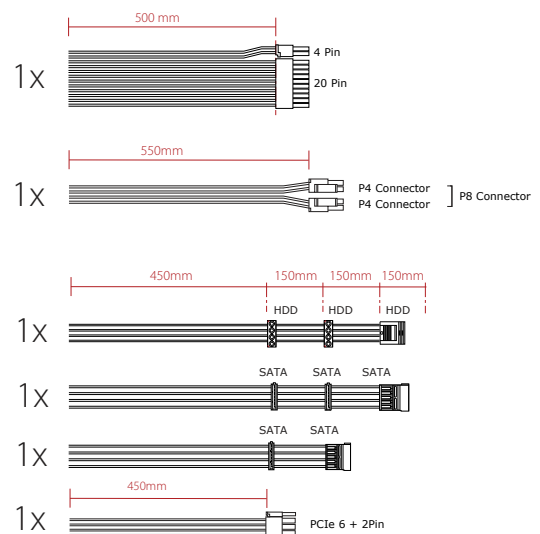


All trademarks and registered marks are the property of their respective companies. Errors excepted. Subject to change without prior notice. Images may differ from original product.

Gaming Series

Technical Data | 550W


	AC INPUT	DC OUTPUT
XP550R10	200 - 240V	+ 3.3V 21.0A
		+ 5.0V 16.0A
		+ 12.0V 48.0A
		- 12.0V 0.5A
		+ 5.0VSB 2.5A
Efficiencies		20% > 85%
		50% > 88%
		100% > 85%
Noise Level		20% ~ 17 db(A)
		50% ~ 18 db(A)
		100% ~ 27 db(A)

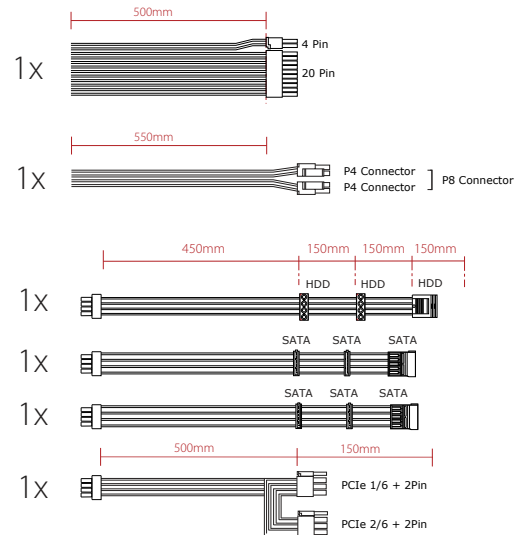


Technical Data | 650W | semi modular

	AC INPUT	DC OUTPUT
XP650R10	200 - 240V	+ 3.3V 23.0A
		+ 5.0V 17.0A
		+ 12.0V 48.0A
		- 12.0V 0.5A
		+ 5.0VSB 2.5A
Efficiencies		20% > 85%
		50% > 88%
		100% > 85%
Noise Level		20% ~ 17 db(A)
		50% ~ 18 db(A)
		100% ~ 29 db(A)

Direct Cables

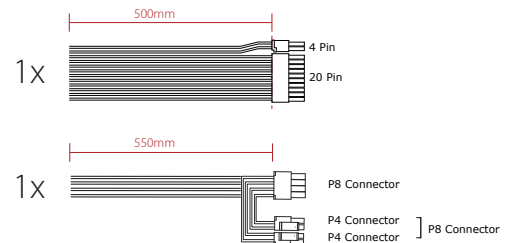


Modular Cables

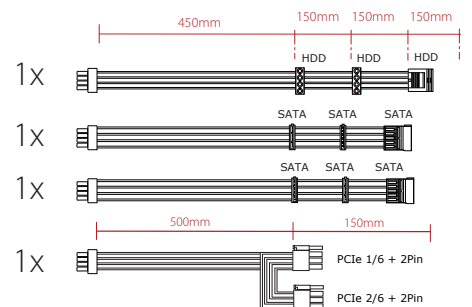

Gaming Series


Technical Data | 750W

	AC INPUT	DC OUTPUT	
XP750R10	200 - 240V	+ 3.3V	20.0A
		+ 5.0V	20.0A
		+ 12.0V	62.5A
		- 12.0V	0.3A
		+ 5.0VSB	3.0A
Efficiencies		20%	> 85%
		50%	> 88%
		100%	> 85%
Noise Level		20%	~ 17 db(A)
		50%	~ 18 db(A)
		100%	~ 29 db(A)

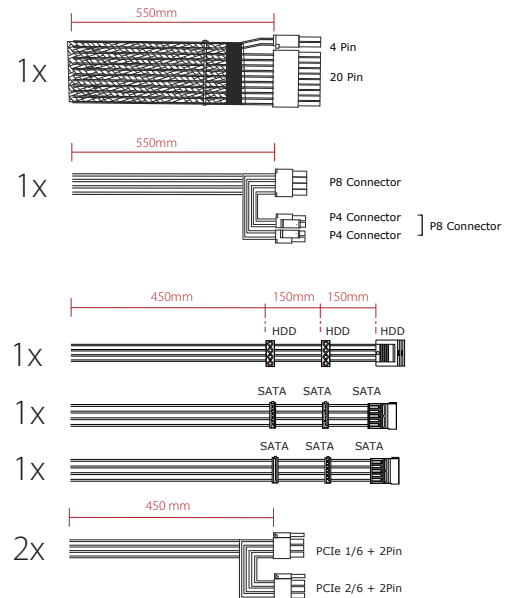

Technical Data | 850W

	AC INPUT	DC OUTPUT	
XP850R10	200 - 240V	+ 3.3V	20.0A
		+ 5.0V	20.0A
		+ 12.0V	70.8A
		- 12.0V	0.3A
		+ 5.0VSB	3.0A
Efficiencies		20%	> 85%
		50%	> 88%
		100%	> 85%
Noise Level		20%	~ 17 db(A)
		50%	~ 18 db(A)
		100%	~ 29 db(A)

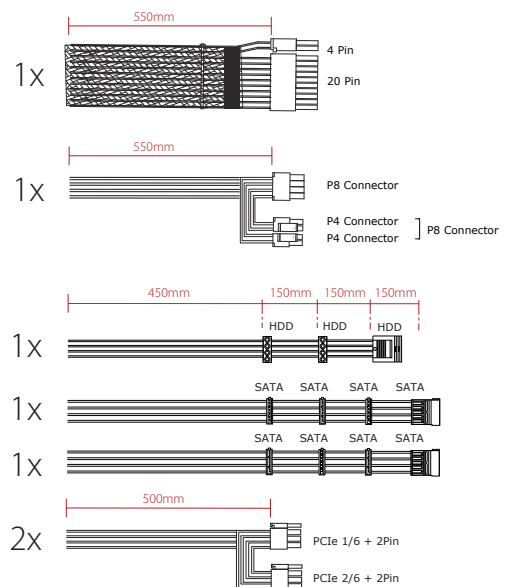

Logistical Data

Manufacturer Number	XP450R10	XP550R10	XP650R10	XP750R10	XP850R10
Item Number	XN213	XN215	XN225*	XN235	XN240
EAN Barcode	4044953501661	4044953501685	4044953501708	4044953502361	4044953502712



All trademarks and registered marks are the property of their respective companies.
Errors excepted. Subject to change without prior notice. Images may differ from original product.