


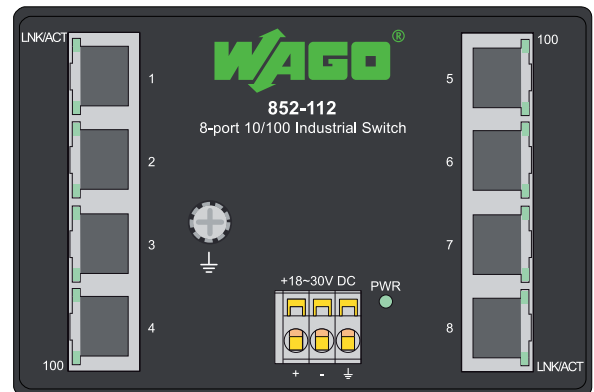

852-112 has 8 ports with each port featuring Auto-negotiation and Auto MDI/MDI-X detection. Existing 10Mbps networks can now be upgraded effortlessly to higher speed 100Mbps Fast ETHERNET networks. The 852-112 8-port density can be used to create multiple segments to alleviate client congestion and provide dedicated bandwidth to each user node. The 852-112 is a cost-effective solution to keep up with the constant demands for emerging IP-based industry communication needs. The switch can be easily configured and installed and is also ideally suited for small to medium-sized networks.

Features:

- 8-port 10/100 Mbps Auto-negotiation ETHERNET ports
- Comprehensive front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X
- Full/half-duplex transfer modes for each port
- Wire speed reception and transmission
- Store-and-forward switching method
- Integrated address Look-Up Engine, supports 2K absolute MAC addresses
- Supports surge protection
- IEEE 802.3x flow control for full duplex
- Supports DIN 35 rail

[illegible][illegible]