


Contact Interface flush-mount – 1 channel

Product ref.: 153489A0

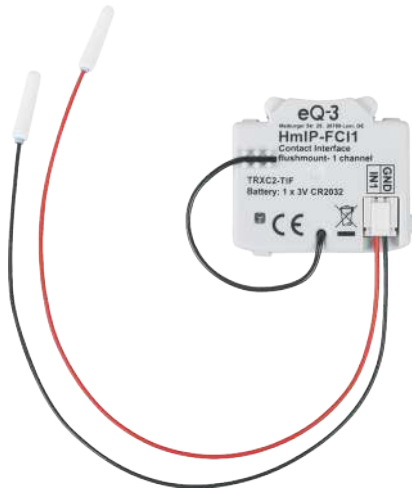

Technical specifications

Supply voltage	1x 3 V CR2032
Current consumption	30 mA max.
Battery life	2 years (typ.)
Degree of protection	IP20
Ambient temperature	5 to 35 °C
Dimensions (W x H x D)	41 x 12 x 35 mm
Weight	14.5 g (including batteries)
Radio frequency band	868.0-868.6 MHz 869.4-869.65 MHz
Typ. open area RF range	280 m



Product features

- For retrofitting of conventional floating push-buttons to enable smart and individual wireless control
- Offers integration of switches, push-buttons or contacts into the Homematic IP system for controlling e.g. lights or shutters
- Easy installation with the durable lithium battery – the device does not need to be connected to the power supply
- Compact housing for installation into flush-mounted boxes – even behind existing switching elements
- Offers comfortable integration while existing switches and switch systems can continue to be used
- To enable operation, the device has to be connected with one of the following solutions:
 - Homematic IP Access Point with free smartphone app and free cloud service
 - Central Control Unit CCU2/CCU3 with local user interface WebUI
 - Third-party solutions of partners

Logistical data

Product reference	153489A0
EAN code	4047976534890
Short description	HmIP-FCI1
Packing unit	144
Packing dimensions	122 x 93 x 36 mm
Weight incl. packaging	77.0 g

Package contents

Homematic IP Contact Interface flush-mount – 1 channel

Connecting cable

3 V CR2032 battery

User manual