



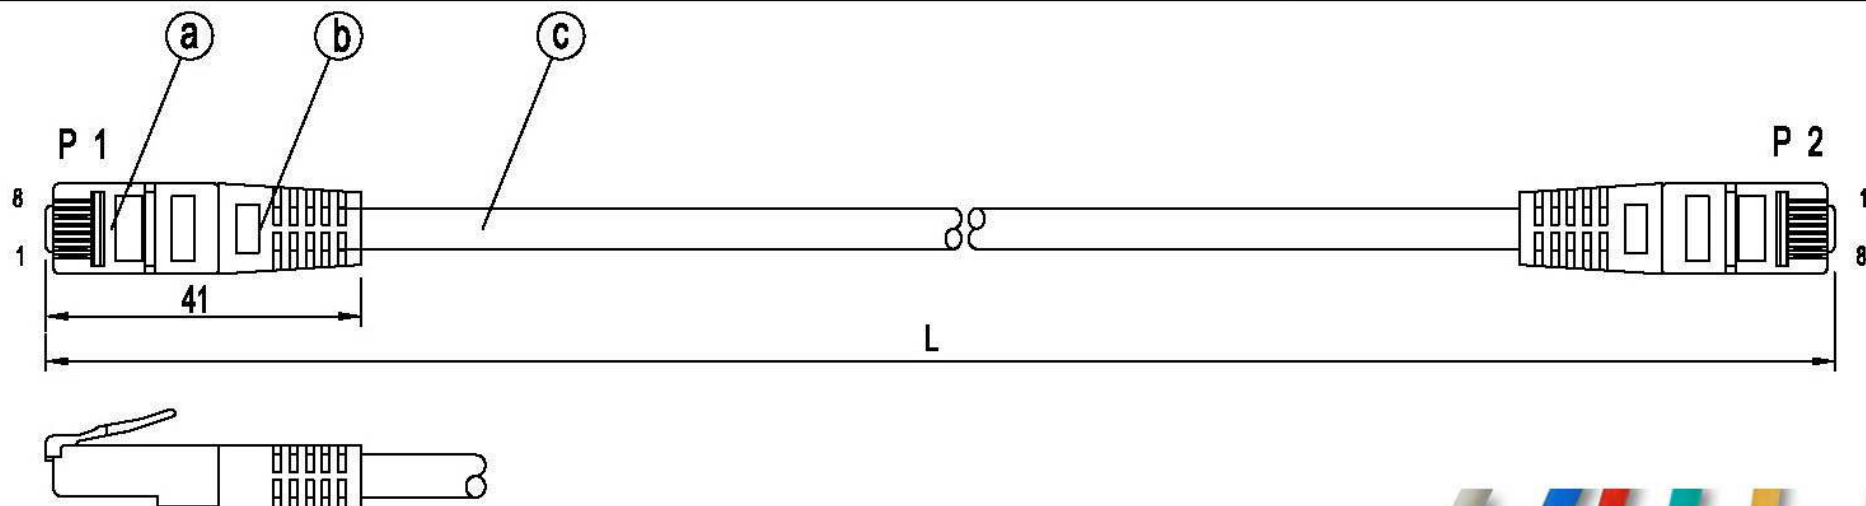

Wiring Diagram

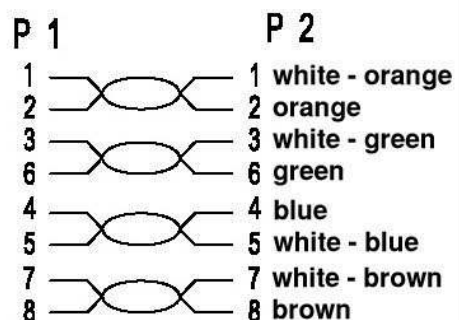


Temperature Range: -20°C ~ 70°C

Item No.	Color	Length (L)
K8100GR.x	grey	0,5m +/- 5mm
K8100MA.x	magenta (pink)	1m +/- 10mm
K8100WS.x	white	1,5m +/- 15mm
K8100GN.x	green	2m +/- 20mm
K8100BL.x	blue	3m +/- 30mm
K8100GE.x	yellow	5m +/- 50mm
K8100RT.x	red	7,5m +/- 75mm
K8100SW.x	black	10m +/- 100mm
K8100OR.x	orange	15m +/- 150mm
		20m +/- 200mm
		25m +/- 250mm
		30m +/- 300mm



c	Cable	UTP Cat.6 Patch cord, AWG24/7 x 4P, PVC sheath flame retardant acc. to IEC 60332-1, OD = 5,9mm Printing: CAT.6 UTP AWG24 stranded x 4pairs cable	L / mm
b	Overmold	PVC 75A / Length imprint on boot	8 g
a	Connector	RJ45 8P8C'S UNSHIELDED, GOLD PLATED 3-50u"	2 Pcs
No.	Mat.Name	Description	Quantity

ROHS compliant

Item No.	K8100xx.x			
Description				
UTP Cat.6 Patch cord, AWG24/7 x 4 Pairs, PVC				
Drawing	Check	Approved	Date	
			2007-08-01	