


DSub plugs 9.4 mm, 90° angled, EURO

Article no.

29259.1

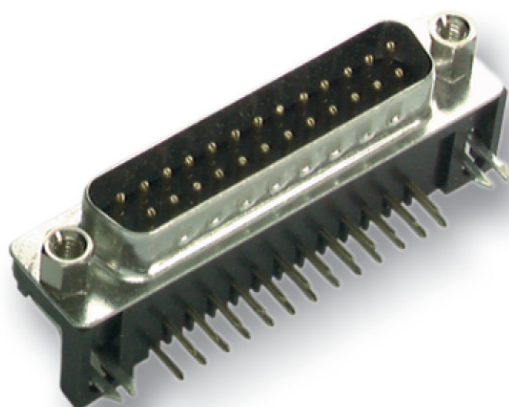

Description

- Quality level III
- UNC 4-40 bolts
- PushFit snap-in fastening element

General data

Model	jack (jack)
-------	-------------

Electrical characteristics

Contact type	male (male)
Connection type	solder

Available variants

Article no.	Title	Number of poles	Type
29259.1	DSub Plug 9.4mm, euro. st. angled, E-DS 09A/KG-T1	9	E-DS 09A KG-T1
34706.1	DSub Plug 9.4mm, euro. st. angled, E-DS 15A/KG-T1	15	E-DS 15A/KG-T1

Technical drawings

This datasheet was created automatically on 25-01-2019 . Technical changes reserved.

DATASHEET

DSub plugs 9.4 mm, 90° angled, EURO

Article no.

29259.1

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA

Insulator Resistance: 1000MΩmin. at DC 500V

Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute




Operating Temperature: -55°C~+105°C

Contact: Brass or Phosphor Bronze

Housing: PBT & 30% Glass Fiber (UL 94V-0)

MALE

FEMALE

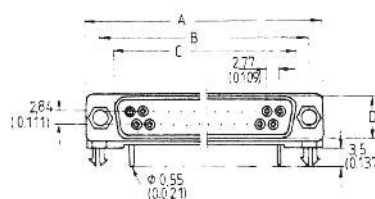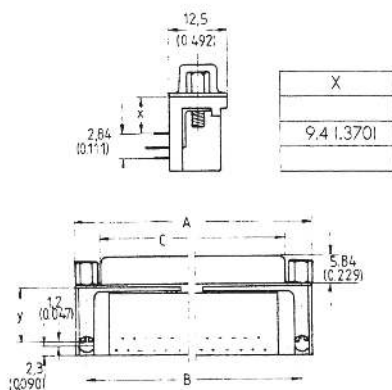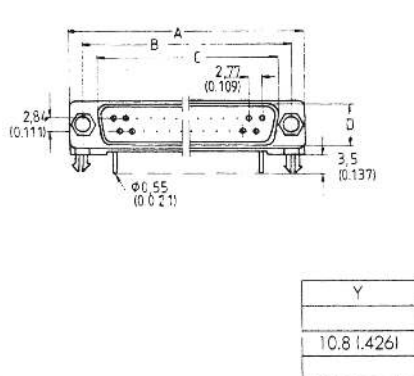

Dimension

No. of contacts	A	B	C	D
9	30.8	25.0	16.9	8.4
15	39.2	33.3	25.3	8.4
25	53.0	47.0	39.0	8.4
37	69.4	63.5	55.4	8.4

