


DSub jacks 9.4 mm, 90° angled, EURO

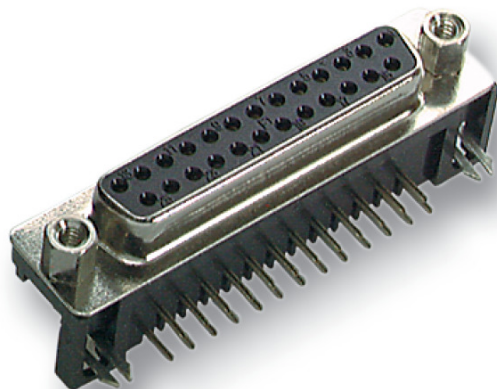

Description

- Quality level III
- UNC 4-40 bolts
- PushFit snap-in fastening element

General data

Model jack (jack)

Electrical characteristics

Contact type female (female)
 Connection type solder




Available variants

Article no.	Title	Number of poles	Type
34701.1	DSub Jack 9.4mm Euro Standard, EDF 09 A/KG-T1	9	EDF 09 A/KG-T1
34702.1	DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1	15	EDF 15 A/KG-T1
34703.1	DSub Jack 9.4mm Euro Standard, EDF 25 A/KG-T1	25	EDF 25 A/KG-T1


DATASHEET

DSub jacks 9.4 mm, 90° angled, EURO

Technical drawings

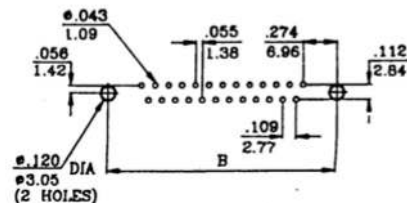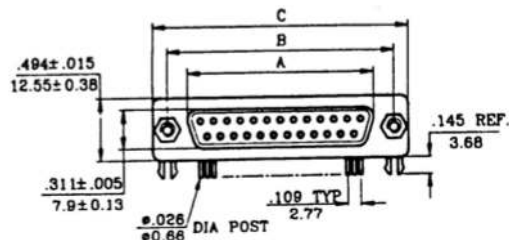

PCB HOLE PATTERNS

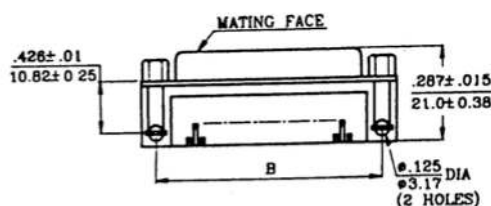

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-0)

DIMENSIONS

SHELL SIZE	A .010 0.25	B .005 0.13	C .015 0.38
9	0.643 16.33	0.984 24.99	1.213 30.81
15	0.971 24.66	1.312 33.32	1.541 39.14
25	1.511 38.38	1.852 47.04	2.088 53.04
37	2.159 54.84	2.500 63.50	2.729 69.32

ORDERING INFORMATION:

POLE	PART NO.
09	34701.1
15	34702.1
25	34703.1
37	34704.1

RoHS COMPLIANT

