

## Cat.6A Keystone Jack STP, Slim Type

Part no.: NK4019

### Technical Features

PrimeLine Cat.6A Class EA, 500 MHz



Supports PoE, PoE+ and PoE++

180° toolless, width only 14.8mm

For AWG22-26 solid wires

Cat.6A Channel Link certified

### Technical Drawing

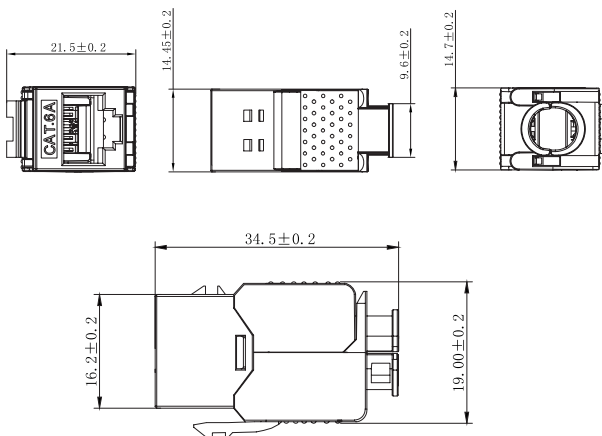

#### Electrical:

1. Contact resistance: 20MΩ max.
2. Insulation resistance: 500MΩ min. @ 500V DC
3. Withstand voltage: DC 1000V AC 700V RMS 60Hz, 1min
4. Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06  
DIN EN 50173-1:2011-09  
TIA/EIA-568-C.2 (2009-08)  
IEC 60603-7-5 Ed.1 (12/2008)
5. Compliance with Class EA up to 500 MHz to ISO/IEC 11801 Ed.2.2:2011-06  
DIN EN 50173-1:2011-09

#### Environmental:

1. Storage temperature: -40°~70°
2. Operation temperature: -10°~60°

#### Mechanical:

1. Shield Material: Zinc Alloy (Silver)
2. IDC Material: PC Terminal: Phosphor Bronze, Tin Plating
3. RJ45 Contact Life: 750 Times Min
4. Plug inforce: <30N
5. Solid cable: 1/22AWG(0.65MM)-1/26AWG(0.40MM) ID:1.05MM-1.5MM
6. Cable OD: 5.0mm-8.0mm
7. PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
8. 360° Shield connection

NK4019



4 052792 060256

Made in China

www.logilink.com



RoHS  
compliant


\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

## Package Content

Cat.6A Keystone Jack STP, Slim Type x 1

## Packaging Information

Packing Dimension	120 x 79mm
Packing Weight	0.018kg
Carton Dimension	475 x 275 x 200mm
Carton Q'ty	250pcs
Carton Weight	6kg

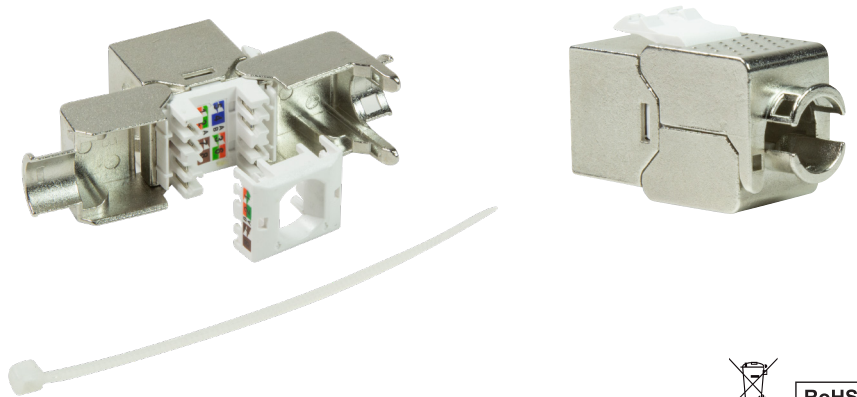

NK4019



4 052792 060256

Made in China

[www.logilink.com](http://www.logilink.com)



RoHS  
compliant

\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.