


BASIC VI 3000 STL



- Human Interface Device (HID) supported
- Equipped with Boost and Buck AVR to stabilize output voltage
- Auto dimming Screen
- Low Own Power Consumption
- Cold (DC) Start Function

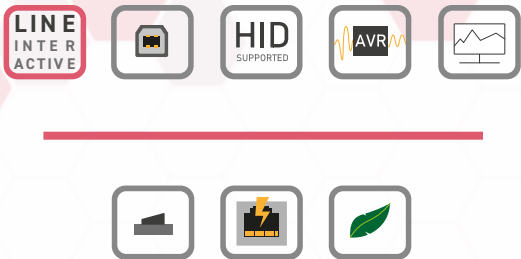

Type E Outlets Type F Outlets Type G Outlets

The PowerWalker Basic VI STL series is designed to answer the essential market needs. This Line Interactive UPS will protect your load from power failures and voltage disturbances, while remaining affordable and compact. It is equipped with a USB port with HID support allowing easy and immediate communication with any O/S.

Additionally, this model has an integrated **ECO-function**. This allows the UPS to extremely reduce its power consumption while in normal mode (not while charging).

General Features	Values
Power Capacity	3000VA/ 1800W
Output Power Factor	0.60
LINE Mode Full Load	93%
Input Specifications	Values
Input Voltage Range	162-290 VAC
Frequency (Synchronized Range)	50Hz or 60Hz
Input Type	IEC C20
Output Specifications	Values
Nominal Output Voltage	230 VAC
Frequency (Battery Mode)	+/-1Hz
Outlets	Type F, Type E (4) or IEC C13 (6)
Battery Specifications	Values
Batteries	4 x 12V/ 7Ah
DC Voltage	1 x 12V
Recharge Time	8h to 90%
Half Load Backup Time	3.5 min
Transfer Time [AC to Battery]	4 ms