


This product is intended for installation only by expert users. Please consult with a qualified technician for installation.


Improper installation may result in damage to your equipment.

1. Please carefully read the manual before beginning the installation process !
2. It is strongly recommended to use market proven pre-mix coolant, such as Thermaltake Coolant.
3. DO NOT USE any kind of alcohol or alcohol derivatives with this reservoir or the acrylic tube may crack and fail ! Do not clean it using alcohol either !

Parts List

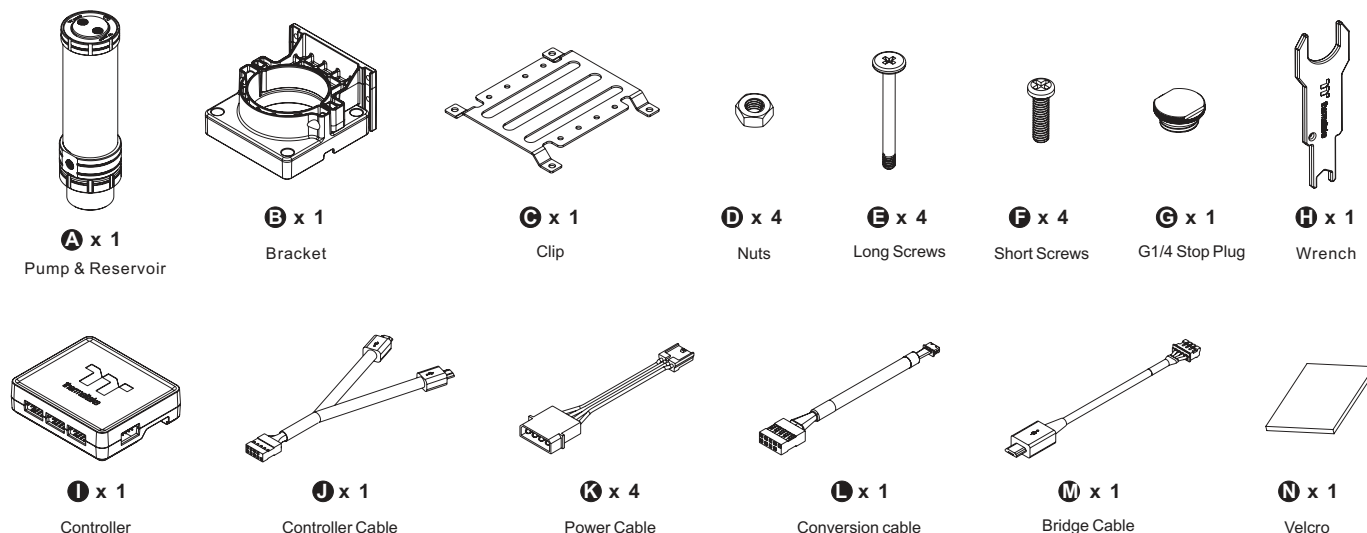


Installation Guide

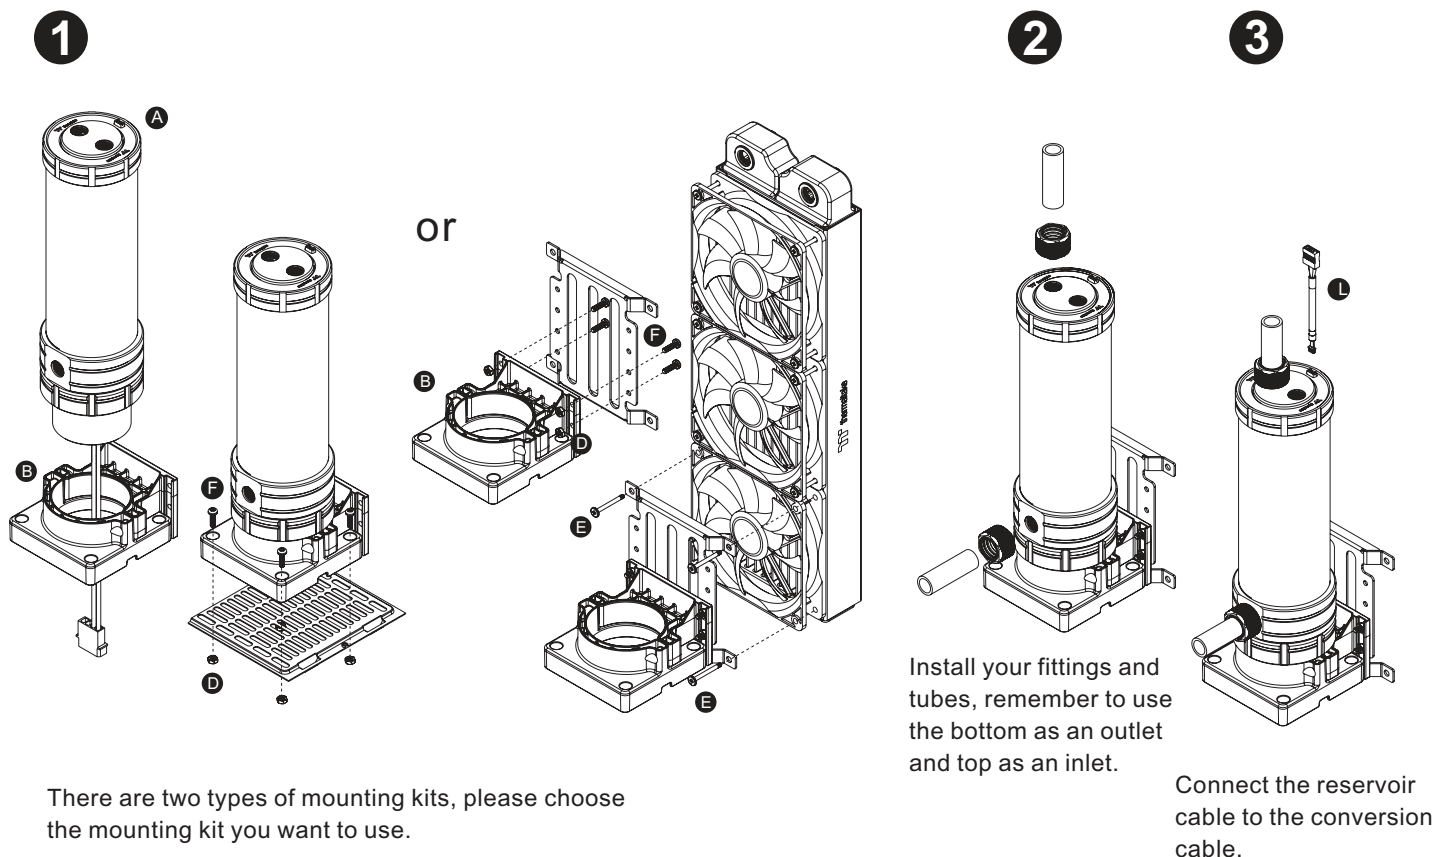


Installation Guide

4

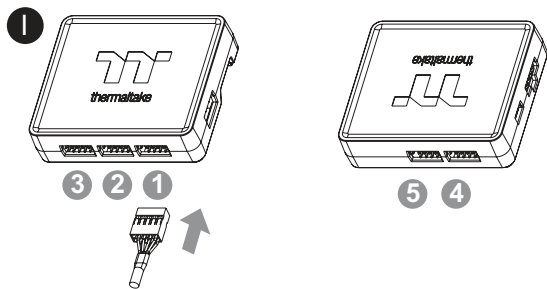


Connect the reservoir cable onto the controller.

5

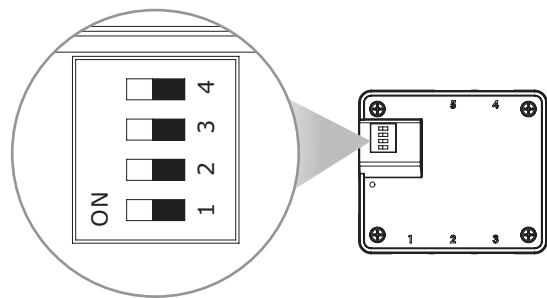


Set the DIP switch on the back side of the controller to assign the number of the controller

6

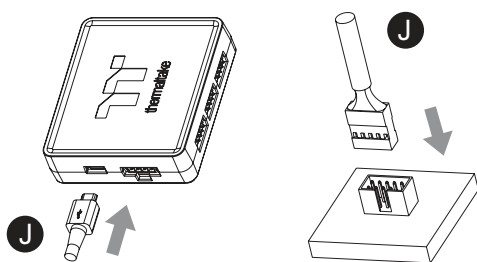


Connect the controller cable onto the mainboard (USB 2.0 9 pin) and controller.

7

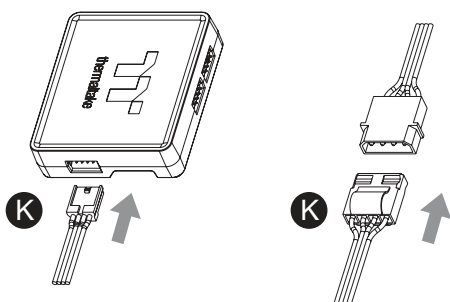


Connect the power cable to the 4pin Molex connector and controller.

8

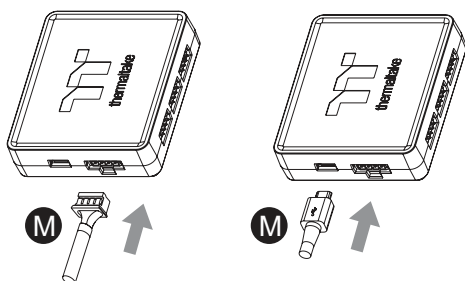


If you want to connect two or more connectors, you can use the bridge cable to connect the controllers.

10

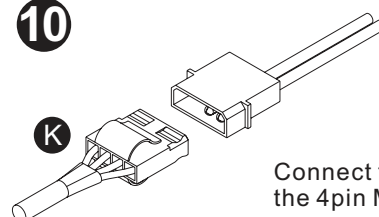

Connect the Pump power cable to the 4pin Molex connector.

9

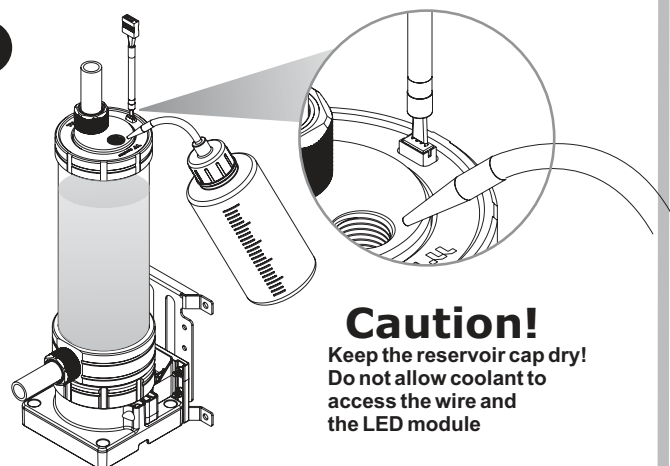

Caution!

Keep the reservoir cap dry!
Do not allow coolant to
access the wire and
the LED module

After adding the recommended coolant, remember to fill the reservoir to only 80% and leave the fill port cap off. This will help stabilize your internal loop pressure