

DisplayPort HDBaseT-Lite Extender

VE901

The VE901 DisplayPort HDBaseT-Lite Extender is able to extend a DisplayPort display up to 70 m using a Cat 6 / 6a / ATEN 2L-2910 Cat 6 cable. This combination of ATEN and HDBaseT™ technology supports sharing 4K media up to 40 m away, offering a simple, adaptable, and cost-effective solution for any professional A/V installation.


The VE901 DisplayPort HDBaseT-Lite Extender is the perfect solution for professional A/V installations that require video signal interference protection, such as in medical and military installations. With its lightweight and easy-to-mount design, and a slip-resistant DC Jack lock mechanism, the VE901 can be installed in a multitude of locations while ensuring peace of mind with its reliability.



Features

- HDBaseT Connectivity – extends a DisplayPort connection up to 70 meters via a single Cat 6a cable or ATEN 2L-2910 Cat 6 cable
- DisplayPort v1.1*; HDCP 1.4 compliant
- Superior video quality – 4K @ 35 m (Cat 5e / 6) / 40 m (Cat 6a / ATEN 2L-2910 Cat 6 cable) and 1920 x 1080 @ 60m (Cat 5e / 6) / 70m (Cat 6a / ATEN 2L-2910 Cat 6 cable)
- HDBaseT Anti-Jamming – resists signal interference during video transmission using HDBaseT technology
- Featuring 3.3V / 500mA power output for powering auxiliary devices
- Plug-and-play
- Rack-Mountable

*Note: DisplayPort v1.1 supports up to 4K2K @ 30Hz.

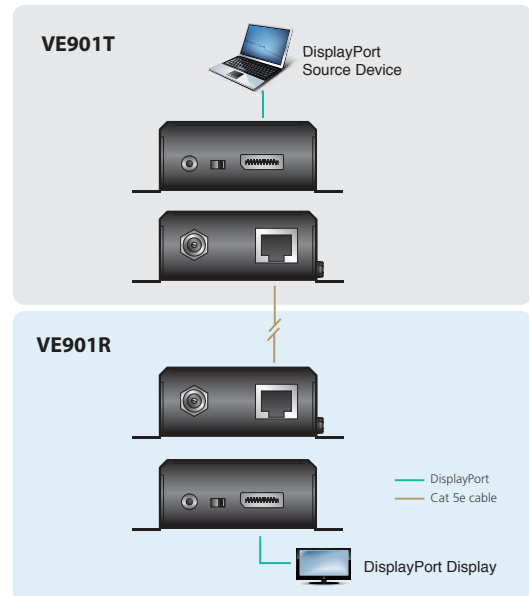

Specifications

	VE901R	VE901T
Video Input		
Interfaces	N/A	1 x DisplayPort Female (Black)
Impedance	N/A	100 Ω
Max. Distance	N/A	1.5 m
Video Output		
Interfaces	1 x DisplayPort Female (Black)	N/A
Impedance	100 Ω	N/A
Video		
Max. Data Rate	10.2Gbps (3.4Gbps per lane)	10.2Gbps (3.4Gbps per lane)
Max. Pixel Clock	297 MHz	297 MHz
Compliance	DisplayPort (Deep Color, 4K); HDCP Compatible	
Max. Resolutions / Distance	Up to 4K @ 35 m (Cat 5e / 6) / 40 m (Cat 6a / ATEN 2L-2910 Cat 6 cable); 1080p @ 60 m (Cat 5e / 6) / 70 m (Cat 6a / ATEN 2L-2910 Cat 6 cable) *4K supported: 4096 x 2160 / 3840 x 2160 @ 30 Hz (4:4:4)	
Audio		
Input	N/A	1 x DisplayPort Female (Black)
Output	1 x DisplayPort Female (Black)	N/A
Connectors		
Power	1 x DC Jack (Black) with locking	
Consumption	DC 5 V : 5.72 W : 27 BTU	DC 5 V : 2.84 W : 13 BTU
Environmental		
Operating Temperature	0 - 40 °C	0 - 40 °C
Storage Temperature	-20 - 60 °C	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing	
Physical Properties		
Housing	Metal	Metal
Weight	0.27 kg	0.24 kg
Dimensions (L x W x H) with bracket	9.77 x 8.70 x 3.00 cm	9.77 x 8.70 x 3.00 cm
Dimensions (L x W x H) without bracket	9.42 x 6.60 x 2.90 cm	9.42 x 6.60 x 2.90 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 12/2021 V3.0

© Copyright 2021 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.

