

## 4-port USB 2.0 CAT 5 Extender UEH4002A


- The UEH4002A 4-port USB 2.0 CAT 5 Extender incorporates patented ExtremeUSB® technology that enables users to extend beyond the standard 5 meter cable limit for USB peripheral devices.

The UEH4002A provides a durable, high quality connection that harnesses the full capability of the USB 2.0 standard, to ensure reliable data communication. A true plug-and-play solution, the UEH4002A is compatible with all leading operating systems, and supports all USB peripherals such as flash drives, keyboards, mice, webcams and interactive whiteboards across a dedicated CAT 5e connection. An integrated four port hub allows for extension of up to four USB devices without the need for an additional hub.



### Features

- Extends USB transmission distance up to 100 m
- Supports all USB 2.0 devices up to 480 Mbps
- ExtremeUSB® – supports transparent USB 2.0 signals and true plug-and-play (no software or drivers required)
- Fully compliant with USB Electrical and Timing
- Works with all major operating systems: Windows®, OS X®, and Linux®

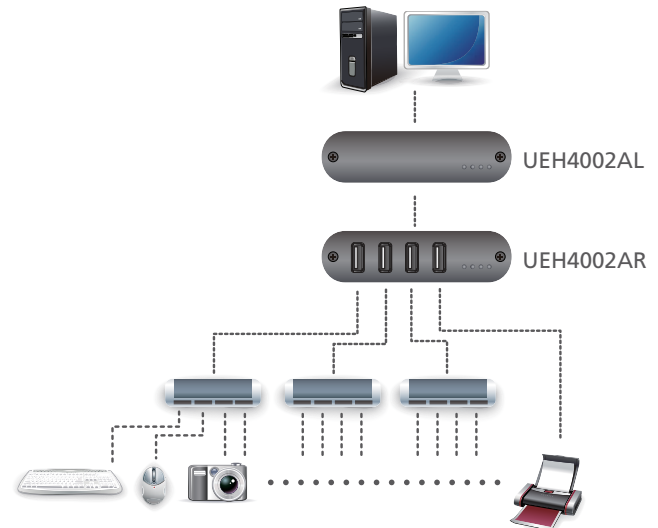

### Specifications

| Function                     | UEH4002AL                     | UEH4002AR                     |
|------------------------------|-------------------------------|-------------------------------|
| <b>Connectors</b>            |                               |                               |
| USB Port                     | 1 x USB Type B Female         | 4 x USB Type A Female         |
| Link                         | 1 x RJ45 Female               | 1 x RJ-45 Female              |
| Power                        | N/A                           | 1 x DC Power Jack             |
| <b>USB Specification</b>     |                               |                               |
|                              | USB 2.0 High/Full/Low Speed   | USB 2.0 High/Full/Low Speed   |
| <b>USB Devices Supported</b> |                               |                               |
|                              | N/A                           | 4 USB Devices                 |
| <b>Power Consumption</b>     |                               |                               |
|                              | Bus-Powered                   | Self-Powered<br>DC 5V, 15W    |
| <b>Environmental</b>         |                               |                               |
| Storage Temperature          | -20° to 70°C                  | -20° to 70°C                  |
| Humidity                     | 0 - 80% RH,<br>Non-condensing | 0 - 80% RH,<br>Non-condensing |
| Operating Temperature        | 0° to 50° C                   | 0° to 50° C                   |
| <b>Physical Properties</b>   |                               |                               |
| Housing                      | Metal                         | Metal                         |
| Weight                       | 0.36kg (L+R)                  |                               |
| Dimensions (L x W x H)       | 10.00 x 7.60 x 2.60<br>cm     | 10.00 x 7.60 x 2.60<br>cm     |

Product information is subject to change without prior notice.

#### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com

Publish Date: 08/2018 V2.0



© Copyright 2018 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.