

B4BE[E]-6-60 4G/5G Bracket Antenna

PANORAMA ANTENNAS

B4BE[E]-6-60



- Cost Effective 2G/3G/4G/5G coverage
- Wall, mast or panel mount
- Integrated low loss cable

The B4BE[E] antenna is a cost effective omni-directional broad band antenna for 4G/3G/2G and 5G devices from 617-960/1710-6000MHz and is suitable for external or internal installation.

The design of the mounting bracket enables simple wall mounting using the supplied screws and wall plugs or mast mounting using a pipe clip or cable ties (not supplied).


The omni-directional radiation pattern allows easy placement of the antenna in an elevated position.

The B4BE variant is supplied with integrated 5mm double shielded CS29 coaxial cable while the B4BEE variant is supplied with RG174 cable for shorter cable runs.

This antenna is an ideal solution for use in industrial and domestic environments with cellular modems/routers and Machine to Machine (M2M) wireless connectivity applications.

Technical Drawing

B4BE-6-60-5SP Shown

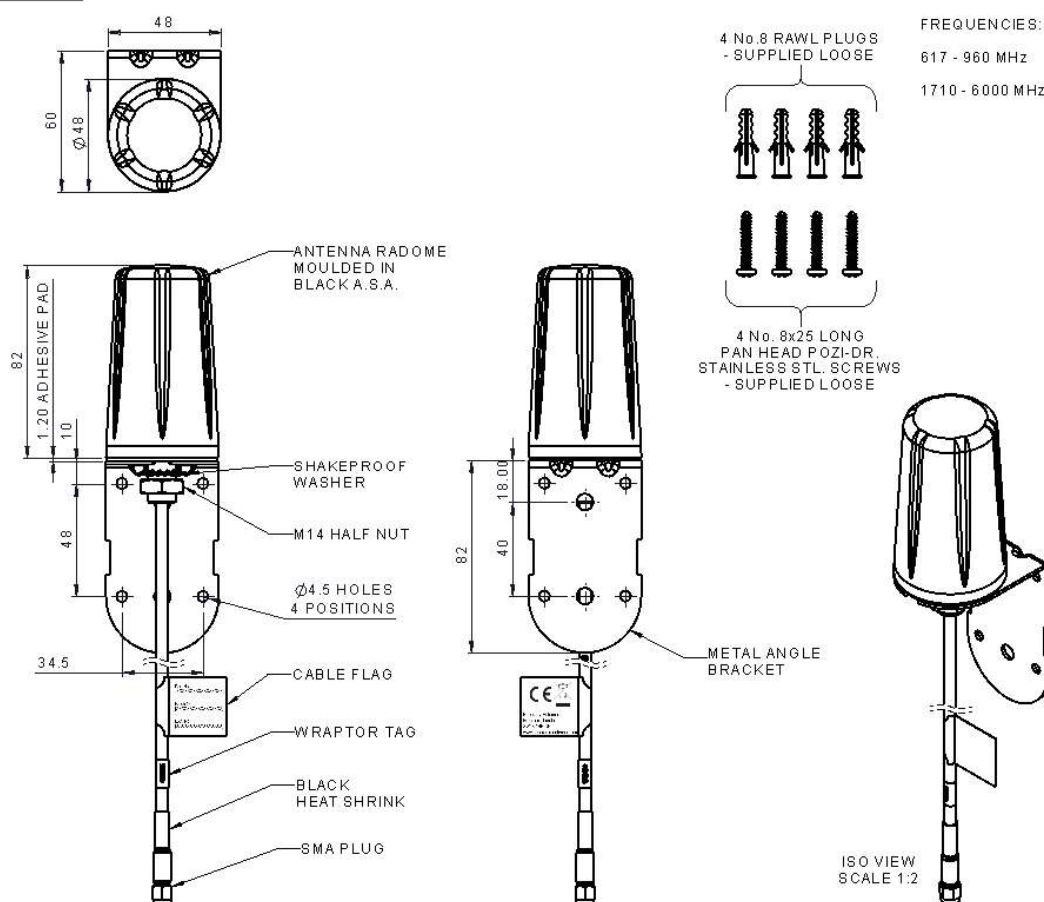


B4BE[E]-6-60 4G/5G Bracket Antenna

PANORAMA ANTENNAS

B4BE[E]-6-60

Product Data

Typical VSWR*

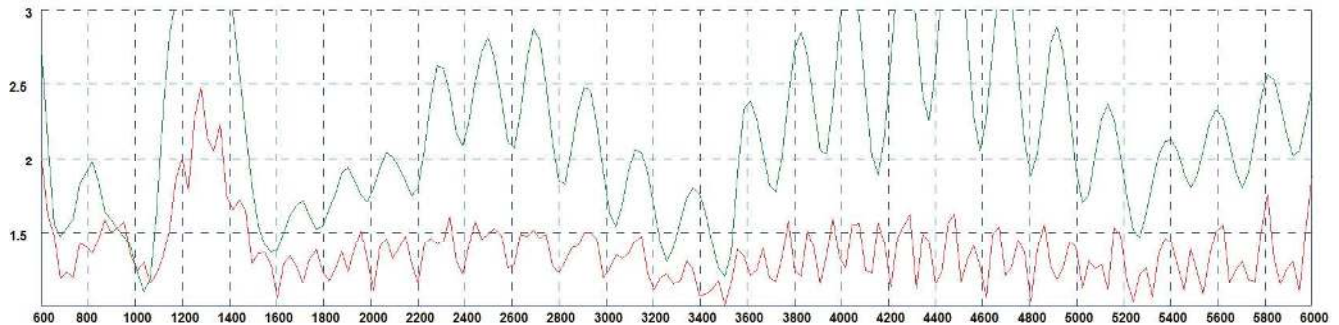

*Red Plot =VSWR measured on supplied bracket with 5m (16') of CS29 cable. Green Plot = VSWR measured on supplied bracket with 0.5m (1.5') of CS29 cable.

Part No.		B4BE-6-60-05SP	B4BE-6-60-5SP	B4BEE-6-60-2SP
Electrical Data				
Frequency Range (MHz)		617-960 / 1710-6000		
Operational Band		2G/3G/4G/5G		
Peak Realised Gain: Isotropic*	698-960MHz	2dBi		
	1710-2700 MHz	3.5dBi		
	3400-3800MHz	5dBi		
	4.9-6000Mhz	7dBi		
VSWR		<2.5:1		
Nominal Radiated Efficiency*		> 70%		
Polarisation		Vertical		
Pattern		Omni-directional		
Impedance		50Ω		
Max Input Power (W)		30		
Mechanical Data				
Dimensions (mm)	Height mounted	164 (6.46")		
	Diameter	48(1.89")		
Operating Temp (°C)		-40° / +85°C (-40° / 185°F)		
Material		ASA, aluminium, zinc plated steel		
Colour		Black & natural		
Ingress Protection		IP66		
Mounting Data				
Fixing		Wall or mast mount		
Mounting ScREW Diameter (mm)		4 (0.16")		
Weight (g)		188	372	
Cable Data				
Type		CS29 (double shielded RG58)	RG174	
Diameter (mm)		5 (0.19")	2.8 (0.1")	
Length (m)		0.5 (1.5')	5(17')	2 (6' 6")
Termination		SMA plug		

* Peak gain and efficiency simulated in CST microwave studio on a bracket excluding cable loss


B4BE[E]-6-60 4G/5G Bracket Antenna

PANORAMA ANTENNAS


B4BE[E]-6-60

Electrical Data


3D Plot (600 MHz)

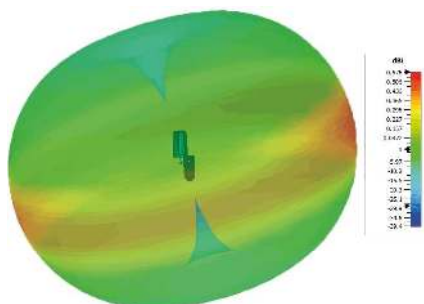


3D Plot (700MHz)

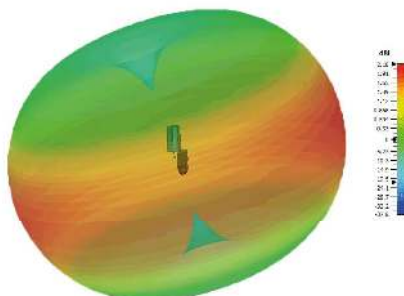


3D Plot (800MHz)

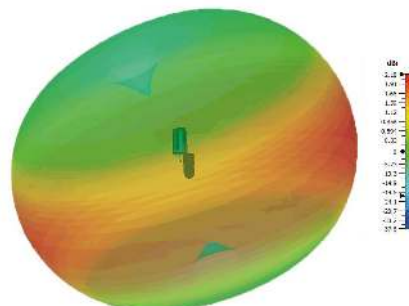


3D Plot (900MHz)

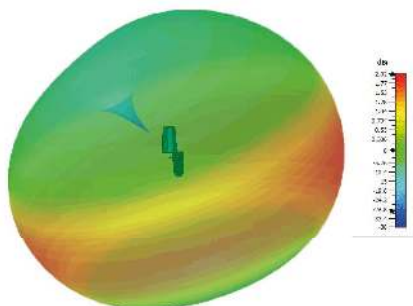


3D Plot (1800MHz)

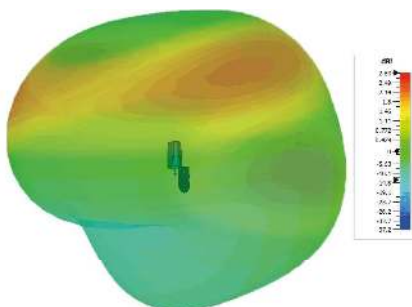


3D Plot (2100MHz)

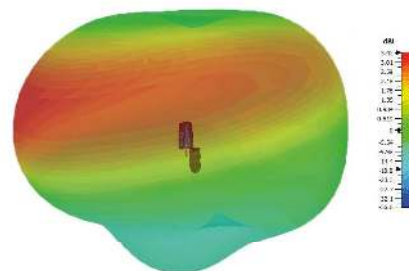


3D Plot (2600 MHz)

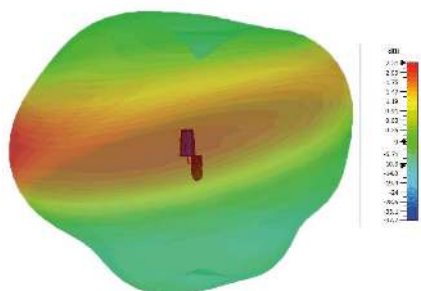

E Plane Plot (3600MHz)

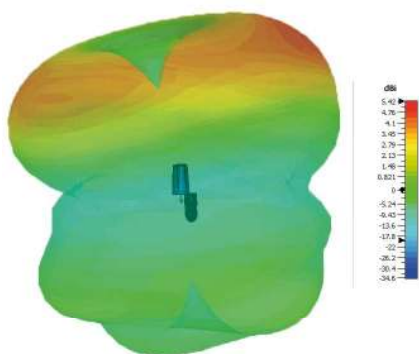

H Plane Plot (5400MHz)

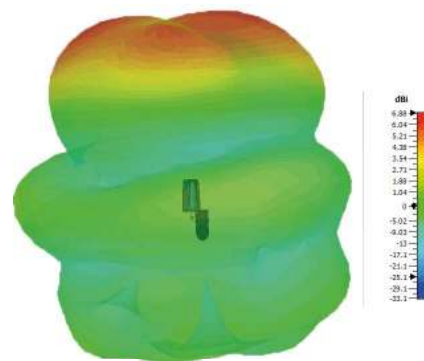

All measurements simulated in CST Microwave Studio without cable