

4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS

L[G]M[X]M4[X]-6-60[-24-58]



Low Profile 4x4 4G/5G MiMo

Up to 6 x 6 MiMo Dual Band WiFi

Optional GPS/GNSS Active Antenna 26dB LNA

The L[G]M[X]M4[X]-6-60[-24-58] range has been designed to provide 4x4 4G/5G MiMo performance from 617-960/1710-6000MHz in a robust low profile package. The flexible platform allows the main elements to be combined with a number of other functions including GPS/GNSS and up to 6x6 MiMo WiFi 2.4/5.0GHz.


The antenna is designed to be panel mounted and can be fitted on a conductive or non- conductive panel. Supplied with integrated flame retardant RG174 cables (Compliant to UNECE 118.01 and EN45545-2) and a halogen free flame retardant radome the antenna is suitable for many environments and applications.

The LGM variants have an integrated GPS/GNSS module supporting GPS, Glonass, Galileo, QZSS and Compass with 26dB LNA gain. This GPS module features advanced filtering for LTE B13/14 designed to minimise potential in band interference.

The antenna is available with a black or white radome which meets IK10 for vandal resistance and IP69K for Ingress protection.

Technical Drawing

LGMHM4-6-60-24-58 Shown

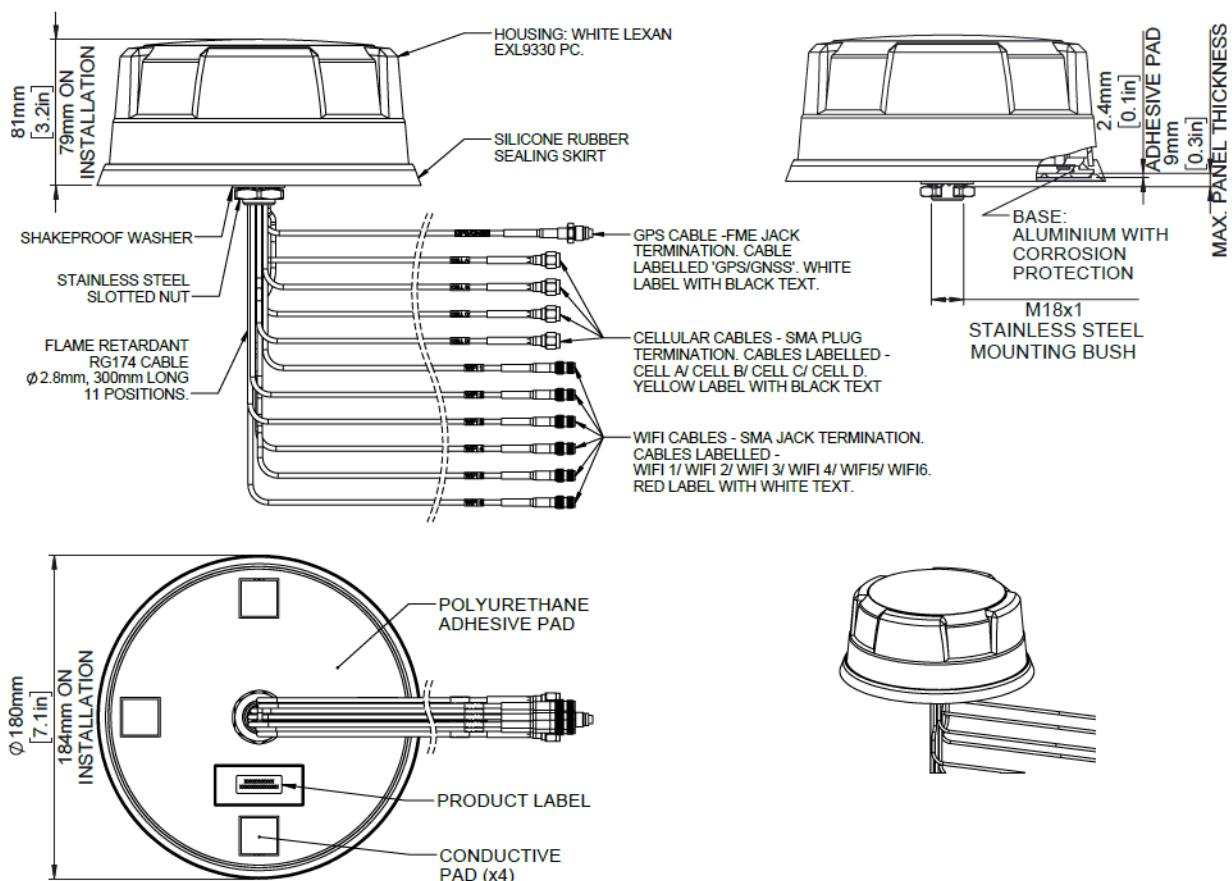

4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS

L[G]M[X]M4[X]-6-60[-24-58]

Part No.

LGMHM4-6-60-24-58 LGMHM4B-6-60-24-58 LGMQM4-6-60-24-58 LGMQM4B-6-60-24-58

Electrical Data				
Frequency Range (MHz)	4G/5G Elements	4x 617-960 / 1710-6000		
	WiFi Elements	6x 2.4/4.9-6GHz		4x 2.4/4.9-6GHz
Peak Gain: Isotropic : (dBi)†		617-960MHz	4	
	4G/5G Elements	1710-3800MHz	8	
		4900-6000MHz	9	
	WiFi Elements	2.4 GHz	9	
		4.9-6.0GHz	9	
Typical Efficiency **	4G/5G Elements	617-960MHz	>50%	
		1710-3800MHz	>75%	
		4900-6000MHz	>85%	
	WiFi Elements	>70%		
Isolation ***	4G/5G Elements	>10dB		
	Wifi Elements	>12dB		
Correlation Co-efficient	4G/5G Elements	< 0.2		
	WiFi Elements	<0.1		
Nominal Impedance			50Ω	
GPS/GNSS Data				
Frequency Range (MHz)			1562-1612	
VSWR			<2.0:1 ± 4MHz -	
Gain: LNA			26dB	
Out of band rejection			>40dB (@ > +/- 100MHz f)	
Typical Noise Figure			≤ 2.7dB	
Notch Filter rejection @787MHz			24dB	
Operating Voltage			3 - 5V DC	
Typcal Current (mA)			15	
Mechanical Data				
Dimensions (mm)	Height	80 (3.1")		
	Diameter	180 (7.1")		
Operating Temp			-40° / +80°C (-40° / +176°F)	
Colour		White	Black	White Black
Ingress Protection			IP69K	
Mounting Data				
Mounting type			Panel mount	
Max panel thickness (mm)			7 (0.27")	
Mounting hole (mm)			19 (3/4")	
Cable Data				
All Cables	Type	RG174 -FR (UN ECE118.01 Compliant)		
	Diameter (mm)	2.8 (0.1")		
	Length (m)	0.3 (1')		
Terminations				
4G/5G			SMA (m)	
WiFi			SMA (f)	
GPS/GNSS			FME (f)	

Panorama Antennas Ltd

Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

PANORAMA ANTENNAS

4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS

L[G]M[X]M4[X]-6-60[-24-58]

Part No.					
		LGMTM4-6-60-24-58	LGMTM4B-6-60-24-58	LGMDM4-6-60-24-58	LGMDM4B-6-60-24-58
Electrical Data					
Frequency Range (MHz)	4G/5G Elements	4x 617-960 / 1710-6000			
	WiFi Elements	3x 2.4/4.9-6GHz		2x 2.4/4.9-6GHz	
Peak Gain: Isotropic : (dBi)†		617-960MHz	4		
	4G/5G Elements	1710-3800MHz	8		
		4900-6000MHz	9		
	WiFi Elements	2.4 GHz	9		
		4.9-6.0GHz	9		
Typical Efficiency **	4G/5G Elements	617-960MHz	>50%		
		1710-3800MHz	>75%		
		4900-6000MHz	>85%		
	WiFi Elements	>70%			
	Isolation ***	4G/5G Elements	>10dB		
Wifi Elements		>12dB			
Correlation Co-efficient	4G/5G Elements	< 0.2			
	WiFi Elements	<0.1			
Nominal Impedance			50Ω		
GPS/GNSS Data					
Frequency Range (MHz)			1562-1612		
VSWR			<2.0:1 ± 4MHz -		
Gain: LNA			26dB		
Out of band rejection			>40dB (@ > +/- 100MHz f)		
Typical Noise Figure			≤ 2.7dB		
Notch Filter rejection @787MHz			24dB		
Operating Voltage			3 - 5V DC		
Typcal Current (mA)			15		
Mechanical Data					
Dimensions (mm)	Height	80 (3.1")			
	Diameter	180 (7.1")			
Operating Temp			-40°/ +80°C (-40° / +176°F)		
Colour		White	Black	White	Black
Ingress Protection			IP69K		
Mounting Data					
Mounting type			Panel mount		
Max panel thickness (mm)			7 (0.27")		
Mounting hole (mm)			19 (3/4")		
Cable Data					
All Cables	Type	RG174 -FR (UN ECE118.01 Compliant)			
	Diameter (mm)	2.8 (0.1")			
	Length (m)	0.3 (1')			
Terminations					
4G/5G			SMA (m)		
WiFi			SMA (f)		
GPS/GNSS			FME (f)		

4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS

L[G]M[X]M4[X]-6-60[-24-58]

Part No.		LGMM4-6-60	LGMM4B-6-60	LPMM4-6-60	LPMM4B-6-60
Electrical Data					
Frequency Range (MHz)	4G/5G Elements	4x 617-960 / 1710-6000			
Peak Gain: Isotropic : (dBi)†	4G/5G Elements	617-960MHz	4		
		1710-3800MHz	8		
		4900-6000MHz	9		
Typical Efficiency **	4G/5G Elements	617-960MHz	>50%		
		1710-3800MHz	>75%		
		4900-6000MHz	>85%		
Isolation ***	4G/5G Elements	>10dB			
Correlation Co-efficient	4G/5G Elements	< 0.2			
Nominal Impedance			50Ω		
GPS/GNSS Data					
Frequency Range (MHz)		1562-1612		-	
VSWR		<2.0:1 ± 4MHz		-	
Gain: LNA		26dB		-	
Out of band rejection		>40dB (@ > +/- 100MHz f)		-	
Typical Noise Figure		≤ 2.7dB		-	
Notch Filter rejection @787MHz		24dB		-	
Operating Voltage		3 - 5V DC		-	
Typcal Current (mA)		15		-	
Mechanical Data					
Dimensions (mm)	Height	80 (3.1")			
	Diameter	180 (7.1")			
Operating Temp		-40° / +80°C (-40° / +176°F)			
Colour		White	Black	White	Black
Ingress Protection		IP69K			
Mounting Data					
Mounting type		Panel mount			
Max panel thickness (mm)		7 (0.27")			
Mounting hole (mm)		19 (3/4")			
Cable Data					
All Cables	Type	RG174 -FR (UN ECE118.01 Compliant)			
	Diameter (mm)	2.8 (0.1")			
	Length (m)	0.3 (1')			
Terminations					
4G/5G		SMA (m)			
GPS/GNSS		FME (f)		-	

**Typical efficiency shown for single element of relevant type simulated in CST Microwave Studio on 600x600mm (23.6"x23.6") ground plane excluding cable loss.

*** Isolation shown is worst case across all element pairings measured on 600x600mm (23.6"x23.6") ground plane with 0.5m (1'5") of Cable.

† Typical peak gain shown for single element of relevant type simulated in CST Microwave Studio on 600x600mm (23.6"x23.6") ground plane excluding cable loss.


4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS


L[G]M[X]M4[X]-6-60[24-58]

Electrical Data


Typical VSWR - 4G/5G Elements*

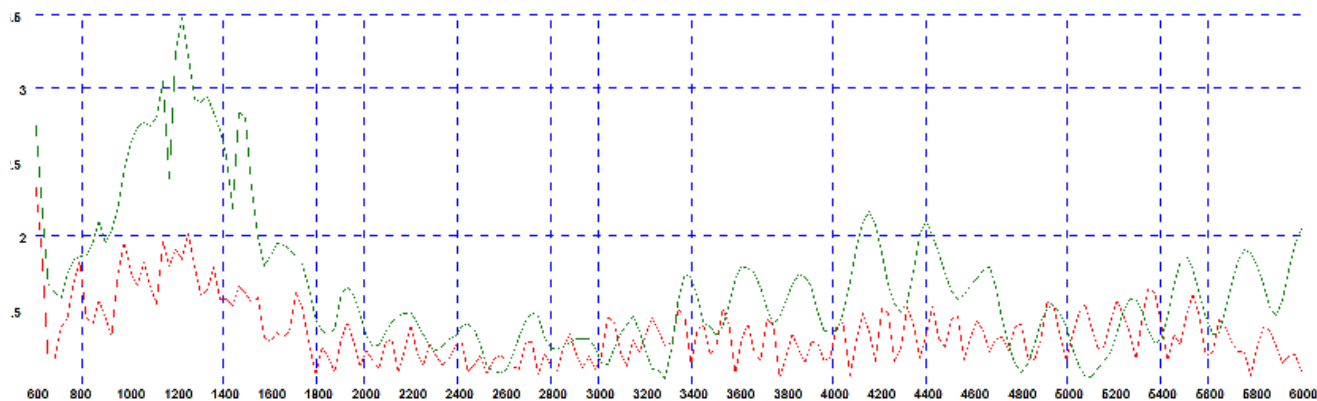

Typical Isolation - 4G/5G Elements*

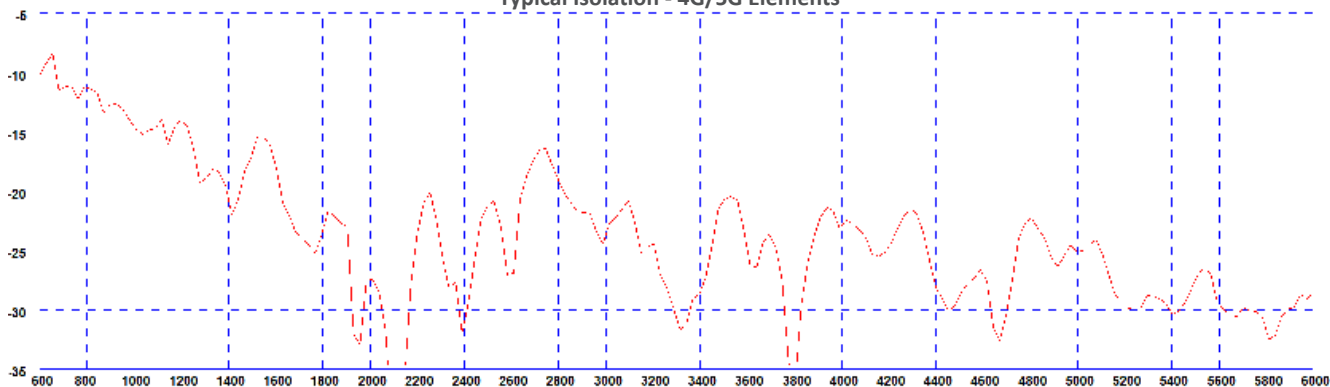

Typical VSWR - WiFi Elements*

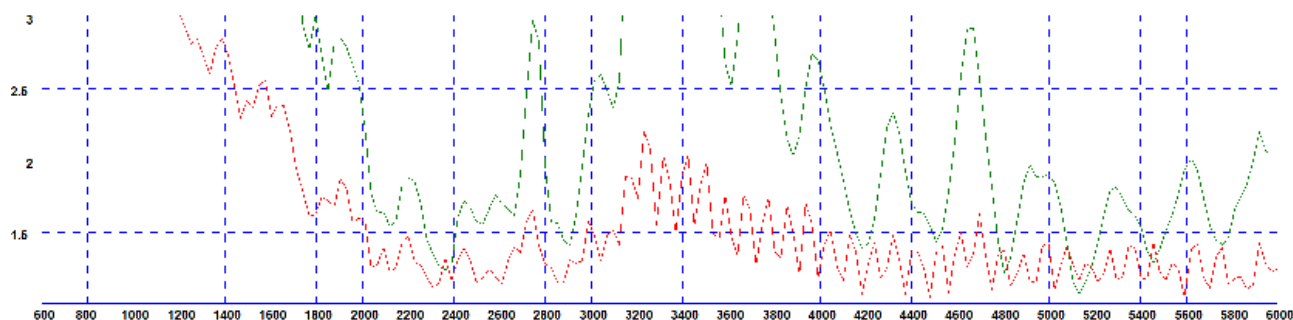


4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS


L[G]M[X]M4[X]-6-60[-24-58]

Typical Efficiency- 4G/5G Elements*

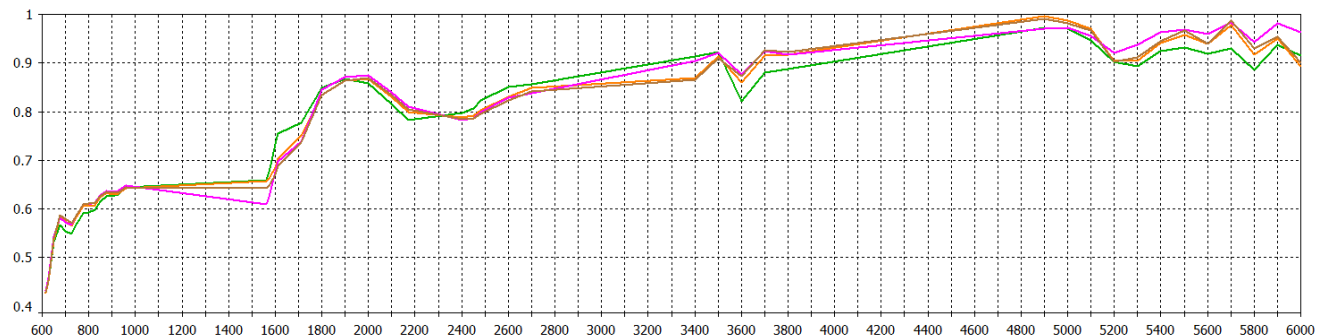


* Efficiency modelled with CST Microwave Studio with antenna mounted on 600x600mm (2'x2') ground plane and ignores cable losses

Typical Peak Gain - 4G/5G Elements*

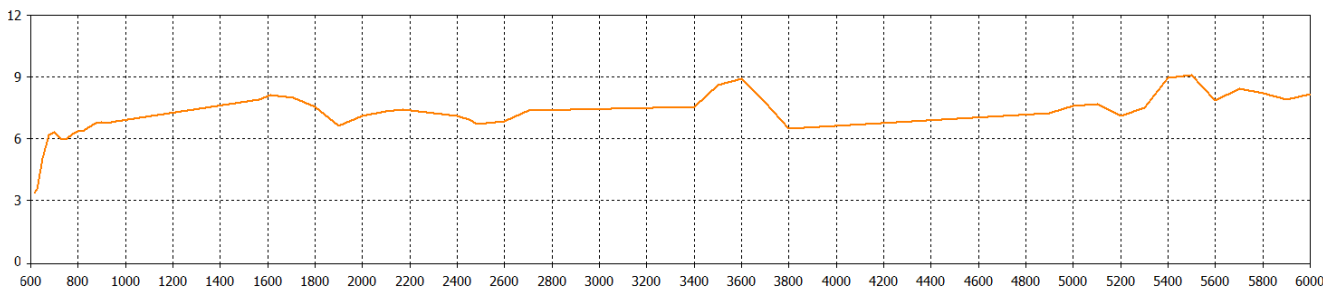


*Swept peak gain modelled with one element fed in CST Microwave Studio on a 600x600mm (2'x2') ground plane excluding cable loss

Typical Efficiency - WiFi Elements*

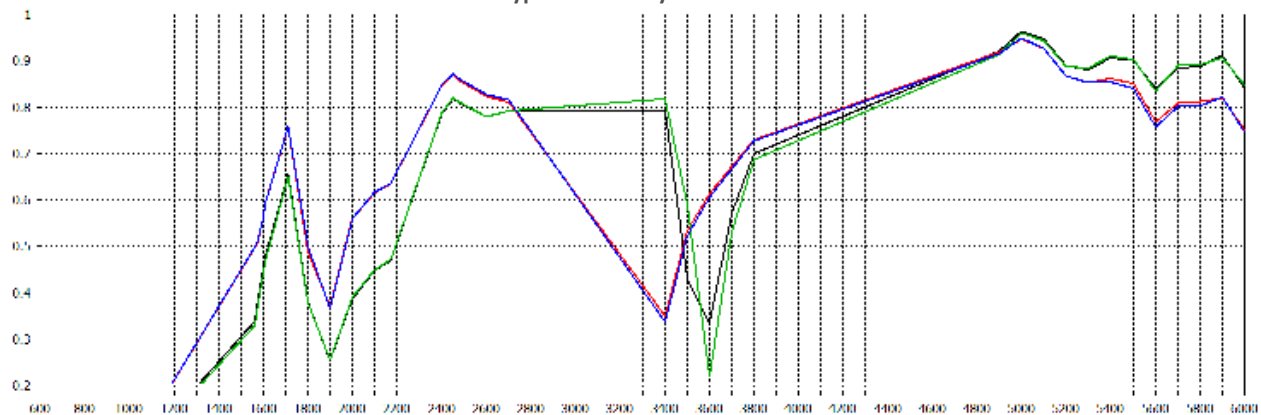

* Efficiency modelled for 4x4 MiMo Wifi version with CST Microwave Studio with antenna mounted on 600x600mm (2'x2') ground plane and ignores cable losses

Typical Swept Peak Gain - WiFi Elements*

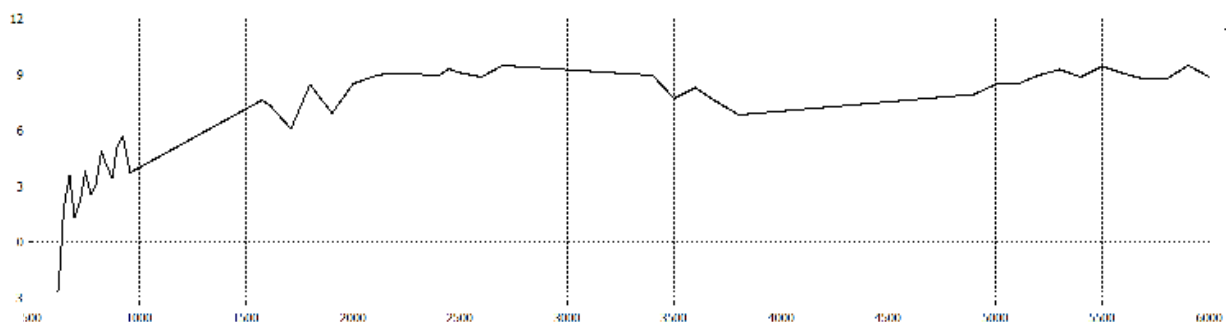

*Swept peak gain modelled with one element fed in CST Microwave Studio on a 600x600mm (2'x2') ground plane excluding cable loss


4x4 MiMo 4G/5G Dome Combination Antenna Range

PANORAMA ANTENNAS


L[G]M[X]M4[X]-6-60-[24-58]

4G/5G Pattern Data


Typical 3D Pattern LTE Elements Side 617MHz




Typical 3D Pattern - LTE Elements Top 617MHz




Typical 3D Pattern LTE Elements Side 700MHz




Typical 3D Pattern LTE Elements Top 700MHz




Typical 3D Pattern LTE Elements Side 800MHz




Typical 3D Pattern - LTE Elements Top 800MHz




Typical 3D Pattern LTE Elements Side 1800MHz




Typical 3D Pattern LTE Elements Top 1800MHz

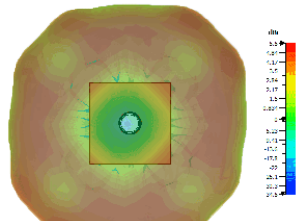


Typical 3D Pattern LTE Elements Side 2100MHz




Typical 3D Pattern - LTE Elements Top 2100MHz




Typical 3D Pattern LTE Elements Side 2600MHz




Typical 3D Pattern LTE Elements Top 2600MHz




Typical 3D Pattern LTE Elements Side 3600MHz




Typical 3D Pattern - LTE Elements Top 3600MHz



Typical 3D Pattern LTE Elements Side 5400MHz




Typical 3D Pattern LTE Elements Top 5400MHz




*Patterns are LGMQM4-6-60-24-58 modelled in CST Microwave Studio on a 600x600mm(2'x2') ground plane with all elements of each type fed.

WiFi Pattern Data


Typical 3D Pattern WiFi Elements Side 2450MHz




Typical 3D Pattern - WiFi Elements Top 2450MHz



Typical 3D Pattern WiFi Elements Side 5400MHz



Typical 3D Pattern WiFi Elements Top 5400MHz



*Patterns are LGMQM4-6-60-24-58 modelled in CST Microwave Studio on a 600x600mm(2'x2') ground plane with all elements of each type fed.

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

PANORAMA ANTENNAS