




# CAT6 F/UTP Cable

## 20m

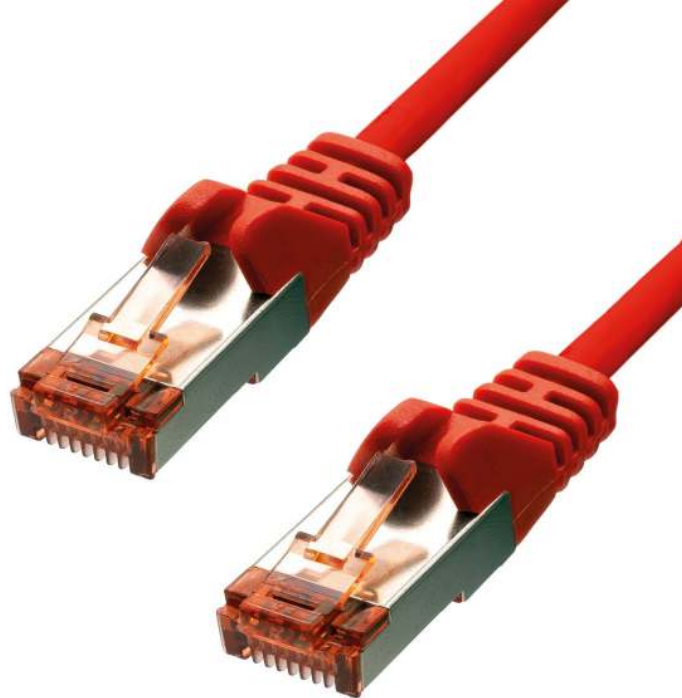

|                            |                          |
|----------------------------|--------------------------|
| Cable Standard             | CAT6                     |
| Cable Shielding            | F/UTP                    |
| Connector 1                | RJ-45                    |
| Connector 1 Gender         | Male                     |
| Connector 1 Form Factor    | Straight                 |
| Connector 2                | RJ-45                    |
| Connector 2 Gender         | Male                     |
| Connector 2 Form Factor    | Straight                 |
| Cable Length               | 20m                      |
| Conductor Type             | Stranded                 |
| Conductor Material         | Copper-clad Aluminum     |
| Jacket Material            | Polyvinyl chloride (PVC) |
| Connector Contacts Plating | 3U" Gold                 |
| AWG Wire Size              | 26                       |
| Outer Diameter             | 5.8mm                    |
| Product Color              | Red                      |
| Weight                     | 535g                     |
| Cabling Technology         | 10/100/1000Base-T(X)     |
| Networking Standard        | IEEE 802.3af             |
| PoE Compatability          | None                     |
| Data Transfer Rate         | 1000 Mbps                |
| Operating Temperature      | -10° - 60° C             |
| Storage Temperature        | -15° - 60° C             |
| Certification              | REACH, RoHS, CE          |
| Plug and Play              | Yes                      |

Part no. V-6FUTP-20R

The ProXtend CAT6 F/UTP CCA ethernet cables are produced with a copper-clad aluminum strands and an AWG of 26 to create a cost-effective product.

The cable is reinforced with strain relief and latch protection allowing for secure installation. The outer layer of the cable is wrapped in a foil screen that enables protection against electromagnetic interference (EMI).

CAT6

F/UTP

CCA

30 YEAR  
WARRANTY



See more products on  
**proxtend.com**

# Network cables


## CAT6 F/UTP CCA

The ProXtend CAT6 F/UTP CCA ethernet cables are produced with a copper-clad aluminum strands and an AWG of 26 to create a cost-effective product. The cable is reinforced with strain relief and latch protection allowing for secure installation. The outer layer of the cable is wrapped in a foil screen that enables protection against electromagnetic interference (EMI).

Supporting a variety of cable standards, lengths and shieldings, ProXtend is your one stop shop for ethernet cables ensuring that you are always able to find a cable that best suits your network requirements.



Latch protection  
for secure installation

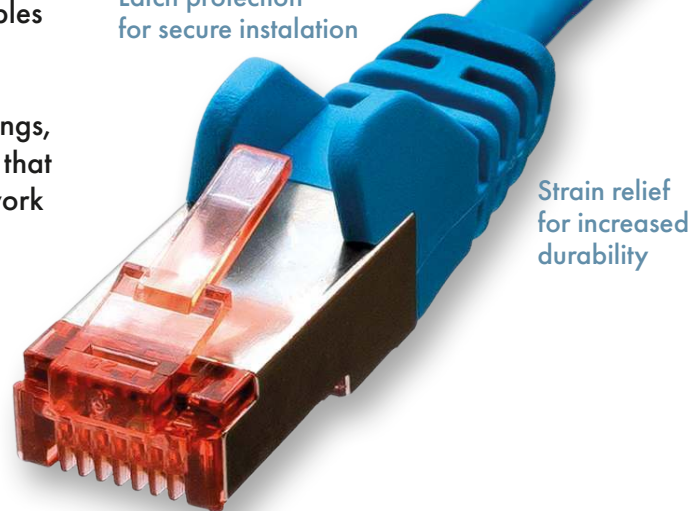

Strain relief  
for increased  
durability

3U" Gold plated RJ45 connectors

## A vast variety of length and colour options

|       | GREY         | WHITE        | BLACK        | BLUE          | GREEN         | ORANGE       | RED          | YELLOW       |
|-------|--------------|--------------|--------------|---------------|---------------|--------------|--------------|--------------|
| 20 cm | V-6FUTP-002G | V-6FUTP-002W | V-6FUTP-002B | V-6FUTP-002BL | V-6FUTP-002GR | V-6FUTP-002O | V-6FUTP-002R | V-6FUTP-002Y |
| 30 cm | V-6FUTP-003G | V-6FUTP-003W | V-6FUTP-003B | V-6FUTP-003BL | V-6FUTP-003GR | V-6FUTP-003O | V-6FUTP-003R | V-6FUTP-003Y |
| 0.5 m | V-6FUTP-005G | V-6FUTP-005W | V-6FUTP-005B | V-6FUTP-005BL | V-6FUTP-005GR | V-6FUTP-005O | V-6FUTP-005R | V-6FUTP-005Y |
| 1 m   | V-6FUTP-01G  | V-6FUTP-01W  | V-6FUTP-01B  | V-6FUTP-01BL  | V-6FUTP-01GR  | V-6FUTP-01O  | V-6FUTP-01R  | V-6FUTP-01Y  |
| 1.5 m | V-6FUTP-015G | V-6FUTP-015W | V-6FUTP-015B | V-6FUTP-015BL | V-6FUTP-015GR | V-6FUTP-015O | V-6FUTP-015R | V-6FUTP-015Y |
| 2 m   | V-6FUTP-02G  | V-6FUTP-02W  | V-6FUTP-02B  | V-6FUTP-02BL  | V-6FUTP-02GR  | V-6FUTP-02O  | V-6FUTP-02R  | V-6FUTP-02Y  |
| 3 m   | V-6FUTP-03G  | V-6FUTP-03W  | V-6FUTP-03B  | V-6FUTP-03BL  | V-6FUTP-03GR  | V-6FUTP-03O  | V-6FUTP-03R  | V-6FUTP-03Y  |
| 5 m   | V-6FUTP-05G  | V-6FUTP-05W  | V-6FUTP-05B  | V-6FUTP-05BL  | V-6FUTP-05GR  | V-6FUTP-05O  | V-6FUTP-05R  | V-6FUTP-05Y  |
| 7m    | V-6FUTP-07G  | V-6FUTP-07W  | V-6FUTP-07B  | V-6FUTP-07BL  | V-6FUTP-07GR  | V-6FUTP-07O  | V-6FUTP-07R  | V-6FUTP-07Y  |
| 10 m  | V-6FUTP-10G  | V-6FUTP-10W  | V-6FUTP-10B  | V-6FUTP-10BL  | V-6FUTP-10GR  | V-6FUTP-10O  | V-6FUTP-10R  | V-6FUTP-10Y  |
| 15 m  | V-6FUTP-15G  | V-6FUTP-15W  | V-6FUTP-15B  | V-6FUTP-15BL  | V-6FUTP-15GR  | V-6FUTP-15O  | V-6FUTP-15R  | V-6FUTP-15Y  |
| 20 m  | V-6FUTP-20G  | V-6FUTP-20W  | V-6FUTP-20B  | V-6FUTP-20BL  | V-6FUTP-20GR  | V-6FUTP-20O  | V-6FUTP-20R  | V-6FUTP-20Y  |



[www.proxtend.com](http://www.proxtend.com)

ProXtend

# Twisted pair Network Cables


A standard network cable contains eight strands twisted into four pairs.

The twisting of the pairs and an electronically conductive shield not only reduce the likelihood of cross-talk between neighboring pairs of conductors within the cable, but also cause the cable to be more resilient to interference from external magnetic altering fields, which can be caused by any cables that conduct electricity.



## Jacket

ProXtend supports three main types of materials used for network cable jackets: PVC (Polyvinyl Chloride), PE (Polyethylene) and LSZH, also known as LSOH (Low Smoke Zero Halogen). Although PVC cables are softer, flexible and easier to handle, the LSZH cables are firmer and less flexible due to their flame retardant compound. The halogen-free jacket of LSZH network cables does not produce dangerous gas, smoke or acid in case of fire and is in many cases becoming a requirement in systems where the protection of people and equipment from toxic and corrosive gasses is critical. The PE jacket is resistant to weathering and UV radiation, which makes it the most common option for outdoor cable systems.

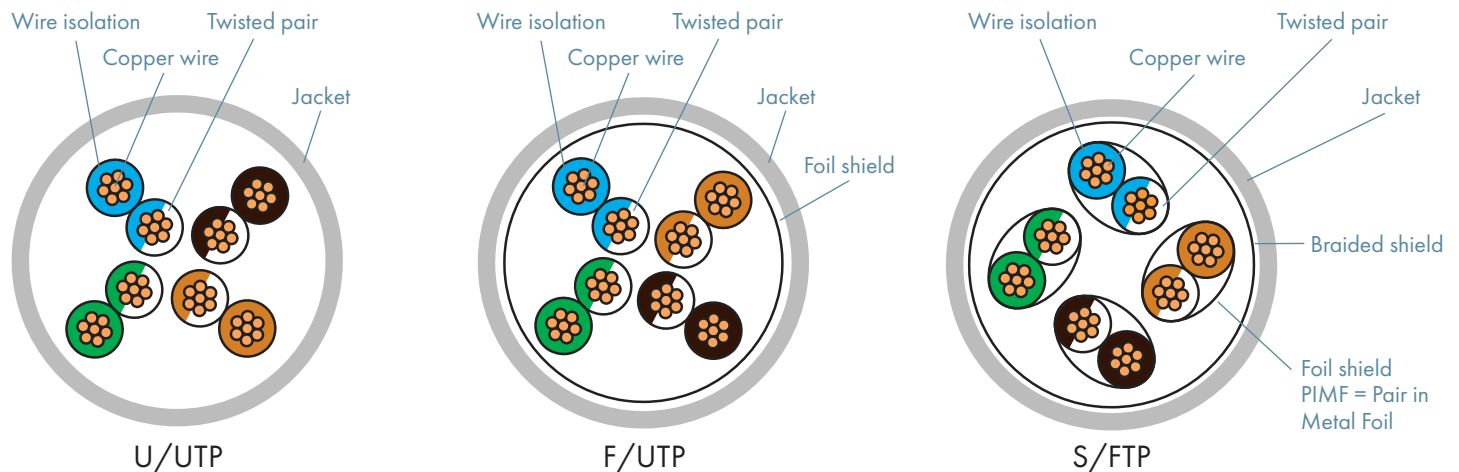

## Shielding

The two basic types of cables are shielded and unshielded. In contrast to the shielded cables, the unshielded cables offer a lesser quality transmission rate, which becomes noticeable at high transmission rates and over long lines. A shielded cable, or a twisted pair, is wrapped in a foil screen which protects the cable from electromagnetic interference (EMI). A cable's shielding can easily be deciphered once the naming convention is understood. The part of the name before the slash (/) signifies the shielding of the outer cable jacket which can be U (unshielded), F (foil shielded), S (braided shield), SF (braided and foil shielded); while the part of the name after the slash signifies the type of shielding of the twisted pairs (TP). The twisted pair shielding can be U (unshielded), F (foil shielded) and S (braided shield). As an example, a U/UTP cable translates to unshielded outer jacket/unshielded twisted pairs.

## Categories

Twisted pair network cables are standardized and divided into different categories based on performance.

| CATEGORY | MAX. DATA RATE | BANDWIDTH | APPLICATION                          |
|----------|----------------|-----------|--------------------------------------|
| CAT 5e   | 1 Gbps         | 100 MHz   | 1GBase-T                             |
| CAT 6    | 1 Gbps         | 250 MHz   | 1GBase-T, 155-MBit-ATM, 622-MBit-ATM |
| CAT 6a   | 10 Gbps        | 500 MHz   | 10GBase-T                            |
| CAT 7    | 10 Gbps        | 600 MHz   | 10GBase-T                            |