




P1

P2

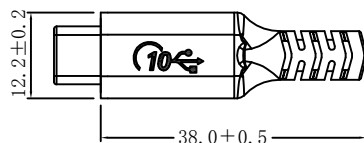

P1

P2

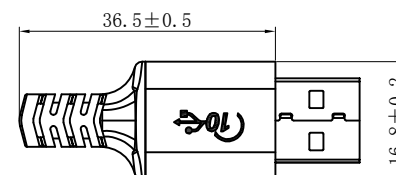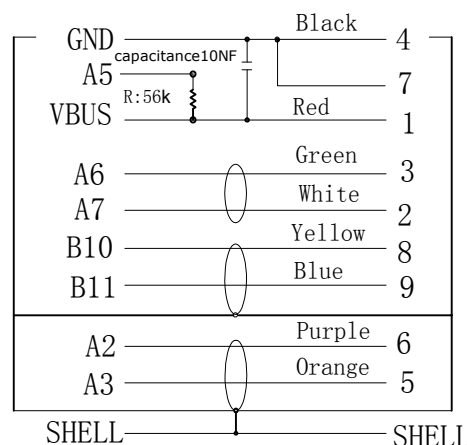

Centered black radius carving



Test Standard:

- A、DC 300V
 B、Insulation Resisance10MΩ
 C、Impedance of conduction 5Ω
 D、100% break, short circuit test
 E、Data transmission speed MAX 10Gbps,Current MAX 3A 60W, voltage drop MAX0.75V

Part No.	Length of finished product(L)	Length of cut cable	Length of jacket removed	Cut the mylar
USB3. 2AC05	500±20	500±5	15±1	4-5
USB3. 2AC1	1000±30	1000±5	15±1	4-5
USB3. 2AC15	1500±30	1500±5	15±1	4-5
USB3. 2AC2	2000±40	2000±5	15±1	4-5

8	5. 09. 02-1	PVC N18P Black 45P	g	12
7	5. 09. 01-0	Low density PE inner mold material	g	8
6	5. 10. 02. 174	USB3.0AM gray aluminum shell 18.5*17*8mm without highlight	pcs	1
5	5. 10. 02. 143	TYPE CM gray aluminum shell 19*12.2*6.35mm without highlight	pcs	1
4	5. 03. 001. 032	USB 3.0 AM three-wire, blue insulation, iron-nickel	pcs	1
3	5. 08. 122	3.1M Cable [3.0Verison] 31302# 22#+30#	pcs	1
2	6. 13. 151	USB TYPE CM With PCB 3.0V Pearl Nickel 10NF+56K	pcs	1
1	5. 01. 02. 092	(7/0.10T*1P+D+AL+MY)*2C+7/0.10T*1P+43/0.10T*2C+F+ADB16/3/0.10T OD:4.5±0.2 mm	mm	500
Item	Part No.	Material	Unit	Dosage

MANUFACTURE

TOLERANCE UNLESS OTHERWISE

X.	±0.50	X°	±5°
.X	±0.30	.X°	±2°
.XX	±0.10	.XX°	±1°
.XXX	±0.05	.XXX°	±0.5°

UNITS

mm

DRAWING

CUSTOMER PART NO.

SCALE

1:1

CHKD

DWG NO.

USB A To USB-C 10G cable

DATE


2022.12.20

APPD

Emil Olsen

PRODUCT NO.

VIEW



VER

AO

MODEL

USB3. 2ACxx

SHEET

1/1