

DS-KH6351-WTE1

Indoor Station with Metal Frame

HIKVISION



Key Feature

- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and capture pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras


Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch colorful TFT screen
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
WDR	/
Video compression standard	/
Focal length	/

Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200 captured pictures (with TF card); 200 alarm records 2 MB RAM (without TF card) reserved for events
Linked network camera capacity	16
Linked indoor extensions capacity	5
Linked doorphone capacity	17 IP doorphones Max.
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi standard	Wi-Fi 2.4 GHz 802.11 b/g/n

Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	1 (reserved)
USB	/
TF card	Max to 128 G
Alarm output	2 relays (30 VDC, 2A)
Power interface	1 (12 VDC power input)
General	
Button	0
Installation	Surface mounting
Indicator	0
Weight	With package: 600 g Without package: 340 g
Protective level	/
Working temperature	-10 ° C to 50 ° C (14 ° F to 122 ° F)
Working humidity	10% to 90%
Dimensions	180 mm × 123 mm × 21 mm (7" × 4.8" × 0.83")
Battery	/
Application environment	Indoor
Power consumption	≤ 3 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek
Material	Aluminum alloy and ABS plastic

Dimension

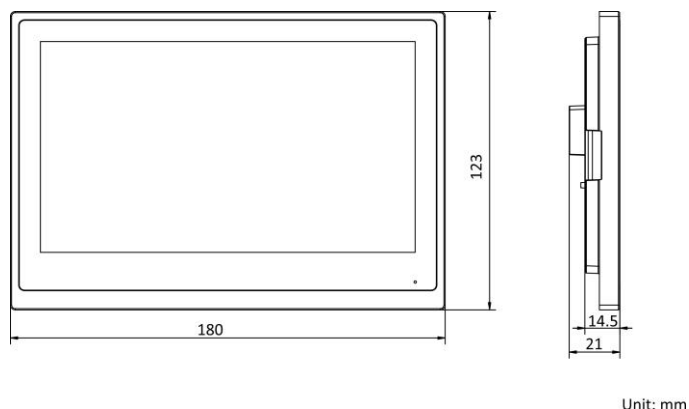

Available Model

DS-KH6351-WTE1

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

