



www.havitsmart.com

HAVIT



H2002E Instruction manual

CREATE
FOR GAME

Note:

The first time you use the headset, it is necessary to perform a proper configuration test, as every consumer's system is different

Audio setup: You can plug the single 4-section connector into the audio jack of your computer and the computer will display a bar with L and R. You can drag it to the side that may not be configured at the time of insertion to balance it left and right.

Microphone setup: You can add a single 4-section interface with an adapter cable to make it a dual 3-section interface and plug it into the audio port and microphone port of your computer device. After plugging in the device, you can first see if the in-line microphone switch is on, use the predefined configuration of reportk or turn on the sound system, check the volume and perform an audio test, check the microphone input recognition in the audio input options and configure it as Configure as needed!


Notes

- 1.Please enjoy music at a moderate volume to prevent adverse effects on the hearing.
- 2.Please be careful to wear when driving or cycling so as not to affect safety.
- 3.Product specifications are subjected to change without notice.
- 4.We can't guarantee the quality if disassemble the headphone without authorization.

Headphone Instruction manual H2002E

Headphone Specification


Speaker: Ø50mm
Impedance: 32±15%Ω
Sensitivity: 114dB±3dB
Frequency response: 20 hz to 20khz
Microphone: Ø6.0×2.7mm
Microphone sensitivity: -42±3dB
cord Length: 2.0m±10%
Plug: 3.5mm

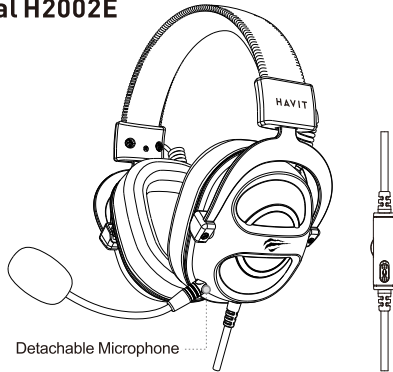

Detachable Microphone

Product sketch

Lightweight,extreme definition design and soft over-ear materials for long time to wear.

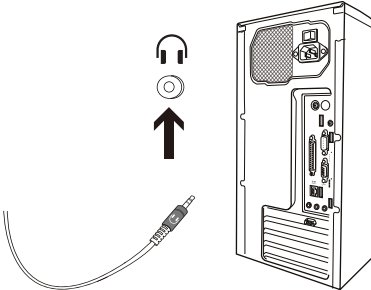

As shown above, it is recommended that headphone audio connector be inserted into the headphone holes behind the chassis.The front interface may not be able to output normally due to main board reasons.

Universal compatibility

The headset can be directly connected to computer, with the following equipment need to plug adapter :

