

DS-KAD7060EY-S 2-wire HD Distributor



- Excellent Product Design: 8 interface indicators show device status, 1 Reset button
- Excellent Product Design: DIN rail installation
- IN/ OUT: Support DS-KAD7060EY-S cascade
- CH1-CH6: Support access to DS-KAD7060EY to communication between multiple buildings


▪ Specification

Device interfaces	
Network interface	NA
Two-wire interface	8 ("IN""OUT" for cascading DS-KAD7060EY-S, CH1-CH6 for cascading DS-KAD7060EY)
Signal indicator	8
Power indicator	1
Reset	1
General	
Power supply	48 VDC
Power consumption	<10 W
Installation	DIN rail installation
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (W × H × D)	143.7 mm × 92.4 mm × 65.9 mm (5.66" × 3.64" × 2.59")

▪ Available Model

DS-KAD7060EY-S

▪ Dimension

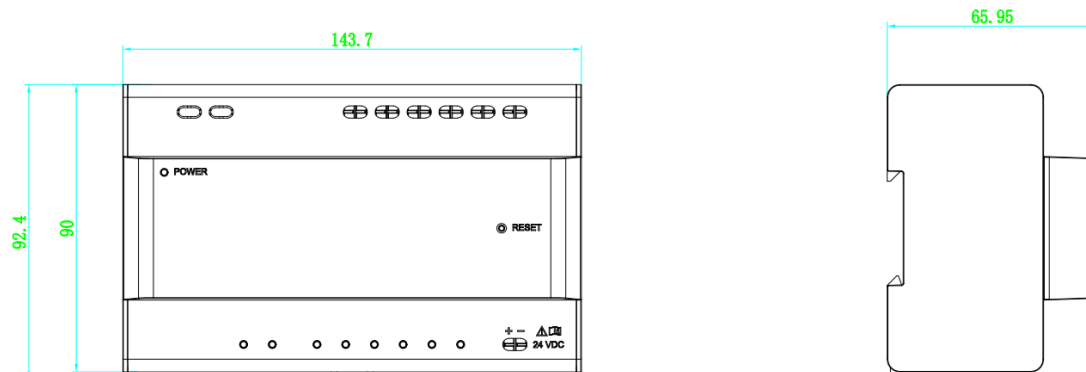

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq