

RG-ES200 Series

Smart Cloud Managed Switches

Unique Value for CCTV Network



Highlights

- Abundant models fit needs for access layer in SMB network
- Cost-Effective Smart Cloud Managed Switches
- IP Camera Recognition, Unique Value for CCTV Network
- Automatic Loop Prevention Ensures Service Continuity
- Lifetime management on Ruijie Cloud at anytime anywhere

Highlight Features

RG-ES200 Series Switches

Gigabit access switch fits the needs in SMB network



802.3at / 802.3af




Abundant Application Scenarios



Centralized Cloud Management

Cost-Effective Smart Cloud Managed Switches

ES200 adopts a light-weighted Cloud management design, providing faster response to support richer features.

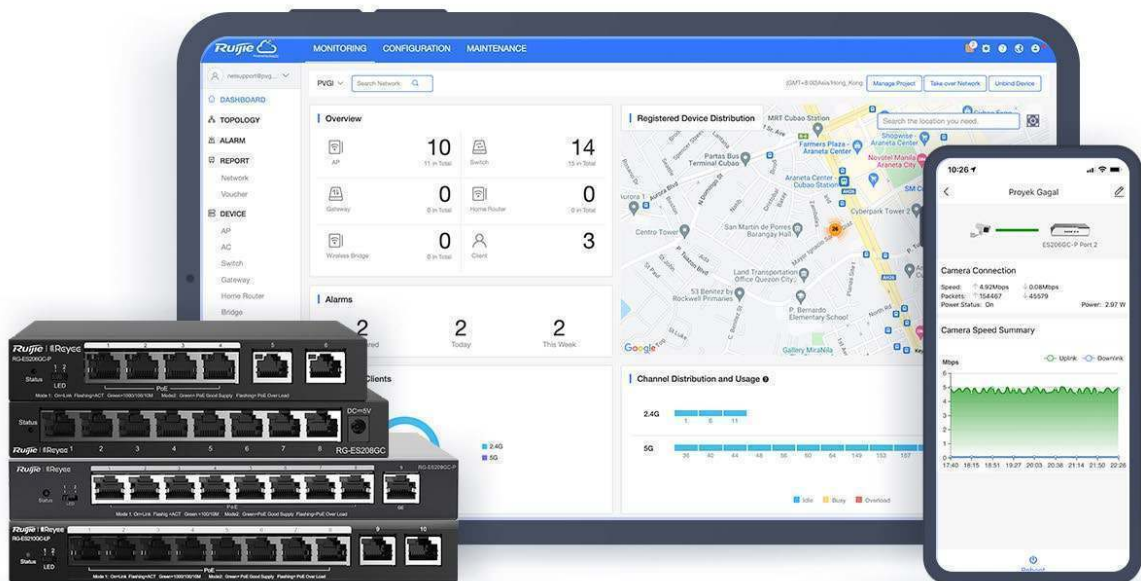

IP Camera/NVR recognition



Automatic Loop Prevention




Mobile VLAN Configuration



Intelligent PoE Adaptive

Highlight Features

Unique Value for CCTV Network

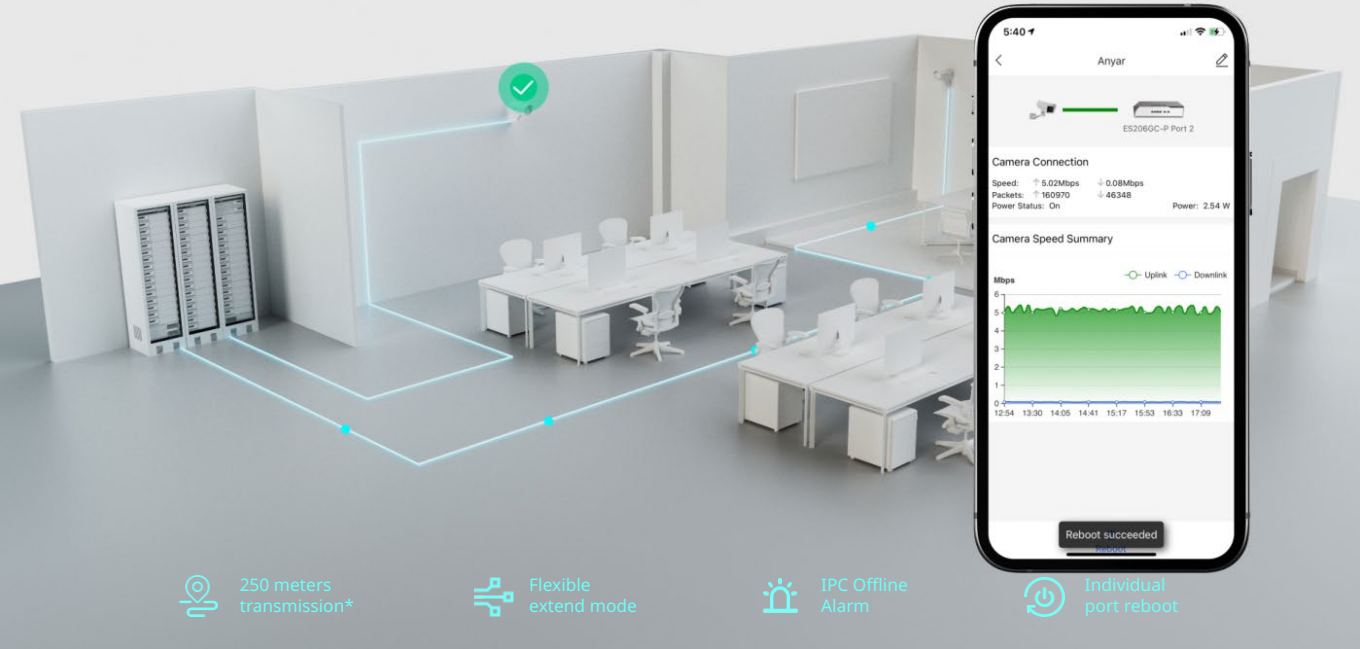

*Using CAT6 Ethernet cables, supporting PoE transmission up to 250 meters with a reduced speed of 10Mbps

Automatic Loop Prevention Ensures Service Continuity

Network stays connected when network loop happens



/ Highlight Features

Cloud, Make Your Business Easy

- SON, zero touch provisioning to Cloud
- Configure VLANs on Ruijie Cloud APP
- Monitor switch statistics at anytime anywhere
- Easy maintenance, save onsite time and cost



Specifications

Basic						
Model	RG-ES205GC-P	RG-ES205GC	RG-ES206GC-P	RG-ES206GS-P	RG-ES208GC	RG-ES209GC-P
10/100/1000Base-T ports	5	5	6	6	8	9
1000Base-X SFP ports	-	-	-	1 combo SFP	-	-
PoE/PoE+ ports	4	-	4	4	-	8
Max. PoE budget	54W	-	54W	54W	-	120W
Layer Type	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2
Switching capacity	10 Gbps	10 Gbps	12 Gbps	12 Gbps	16 Gbps	18 Gbps
Forwarding rate	7.44 Mpps	7.44 Mpps	8.93 Mpps	8.93 Mpps	11.90 Mpps	13.39 Mpps
Packet Buffer	1 Mbit	1 Mbit	1 Mbit	1.5Mbit	1.5 Mbit	1.5 Mbit
MAC address table	2000	2000	4000	4000	4000	4000
Maximum VLAN Support	16	16	16	16	16	16
Dimensions (W x D x H)	148 mm x 78 mm x 26 mm	119 mm x 75 mm x 24 mm	148 mm x 78 mm x 26 mm	148 mm x 78 mm x 26 mm	160 mm x 75 mm x 24 mm	202 mm x 108 mm x 28 mm
Weight (With package)	0.9 kg	0.36 kg	0.79 kg	1.2kg	0.49 kg	1.3 kg
MTBF	> 200,000	> 200,000	> 200,000	> 200,000	> 200,000	> 200,000
Warranty	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years
Software Features						
10/100/1000M Auto/Full/Half Duplex Negotiation	✓	✓	✓	✓	✓	✓
Flow Control	✓	✓	✓	✓	✓	✓
Storm Suppression	✓	✓	✓	✓	✓	✓
Management IP	10.44.77.200	10.44.77.200	10.44.77.200	10.44.77.200	10.44.77.200	10.44.77.200
VLAN Range	1 - 4094	1 - 4094	1 - 4094	1 - 4094	1 - 4094	1 - 4094
Port-based VLAN	✓	✓	✓	✓	✓	✓

Specifications

Software Features						
Model	RG-ES205GC-P	RG-ES205GC	RG-ES206GC-P	RG-ES206GS-P	RG-ES208GC	RG-ES209GC-P
STP / RSTP	-	-	-	-	-	-
QoS	-	-	-	-	-	-
ACL	-	-	-	-	-	-
DHCP Client	✓	✓	✓	✓	✓	✓
DHCP Snooping	✓	✓	✓	✓	✓	✓
Telnet	1 session	1 session	1 session	1 session	1 session	1 session
SSH	-	-	-	-	-	-
DNS Client	✓	✓	✓	✓	✓	✓
SNMP v1/v2/v3	-	-	-	-	-	-
Many-to-one Port Mirroring	✓	✓	✓	✓	✓	✓
Downlink Loop Protection	✓	✓	✓	✓	✓	✓
Loop Disabled Port	✓	✓	✓	✓	✓	✓
Disconnection Duration	2s	2s	2s	2s	2s	2s
Flow Control	✓	✓	✓	✓	✓	✓
Cable Testing	✓	✓	✓	✓	✓	✓
Web-based Management	✓	✓	✓	✓	✓	✓
HTTP	✓	✓	✓	✓	✓	✓
Cloud Management	✓	✓	✓	✓	✓	✓

Specifications

Hardware Features						
Model	RG-ES205GC-P	RG-ES205GC	RG-ES206GC-P	RG-ES206GS-P	RG-ES208GC	RG-ES209GC-P
Reset Button	Rear	Rear	Rear	Rear	Rear	Rear
Cable Hot-swappable	✓	✓	✓	✓	✓	✓
Power Supply Slot	Power adapter	Power adapter	Power adapter	Power adapter	Power adapter	Power adapter
Power Consumption	≤ 60W	≤ 3W	≤ 60W	≤ 60W	≤ 4W	≤ 130W
Power Supplies	54V DC adapter, 1.1A	5V DC adapter, 1A	54V DC adapter, 1.1A	54V DC adapter, 1.1A	5V DC adapter, 1A	54V DC adapter, 2.4A
EEE	-	-	-	-	-	-
Fan	-	-	-	-	-	-
Fan Adaptive Speed Adjustment	-	-	-	-	-	-
Acoustic Noise	Noiseless	Noiseless	Noiseless	Noiseless	Noiseless	Noiseless
Operating Temperature	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Operating Humidity	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH
Storage Humidity	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH
Port Surge	4 kV	4 kV	4 kV	6 kV	4 kV	4 kV
Operating Altitude (meters)	-500 to 5000	-500 to 5000	-500 to 5000	-500 to 5000	-500 to 5000	-500 to 5000
Certificate	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS

/ Specifications

Basic						
Model	RG-ES210GC-LP	RG-ES210GS-P	RG-ES216GC-V2	RG-ES218GC-P	RG-ES224GC-V2	RG-ES226GC-P
10/100/1000Base-T ports	10	10	16	16	24	24
1000Base-X SFP ports	-	1 combo SFP	-	2	-	2
PoE/PoE+ ports	8	8	-	16	-	24
Max. PoE budget	70W	120W	-	240W	-	370W
Layer Type	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2
Switching capacity	20 Gbps	20 Gbps	32 Gbps	36 Gbps	48 Gbps	52 Gbps
Forwarding rate	14.88 Mpps	14.8 Mpps	23.81 Mpps	26.78 Mpps	35.71 Mpps	38.69 Mpps
Packet Buffer	1.5 Mbit	1.5Mbit	4.1 Mbit	4.1 Mbit	4.1 Mbit	4.1 Mbit
MAC address table	4000	4000	8000	8000	8000	8000
Maximum VLAN Support	16	16	16	16	16	16
Dimensions (W x D x H)	202 mm x 108 mm x 28 mm	202 mm x 108 mm x 28 mm	440 mm x 165 mm x 44 mm	300 mm x 230 mm x 43.6 mm	440 mm x 165 mm x 44 mm	440 mm x 289 mm x 43.6 mm
Weight (With package)	1.38 kg	1.38kg	2.7 kg	3.5 kg	2.8 kg	4.2 kg
MTBF	> 200,000	> 200,000	> 200,000	> 200,000	> 200,000	> 200,000
Warranty	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years
Software Features						
10/100/1000M Auto/ Full/Half Duplex Negotiation	✓	✓	✓	✓	✓	✓
Flow Control	✓	✓	✓	✓	✓	✓
Storm Suppression	✓	✓	✓	✓	✓	✓
Management IP	10.44.77.200	10.44.77.200	10.44.77.200	10.44.77.200	10.44.77.200	10.44.77.200
VLAN Range	1 - 4094	1 - 4094	1 - 4094	1 - 4094	1 - 4094	1 - 4094
Port-based VLAN	✓	✓	✓	✓	✓	✓

Specifications

Software Features						
Model	RG-ES210GC-LP	RG-ES210GS-P	RG-ES216GC-V2	RG-ES218GC-P	RG-ES224GC-V2	RG-ES226GC-P
STP / RSTP	-	-	-	-	-	-
QoS	-	-	-	-	-	-
ACL	-	-	-	-	-	-
DHCP Client	✓	✓	✓	✓	✓	✓
DHCP Snooping	✓	✓	✓	✓	✓	✓
Telnet	1 session	1 session	1 session	1 session	1 session	1 session
SSH	-	-	-	-	-	-
DNS Client	✓	✓	✓	✓	✓	✓
SNMP v1/v2/v3	-	-	-	-	-	-
Many-to-one Port Mirroring	✓	✓	✓	✓	✓	✓
Downlink Loop Protection	✓	✓	✓	✓	✓	✓
Loop Disabled Port	✓	✓	✓	✓	✓	✓
Disconnection Duration	2s	2s	2s	2s	2s	2s
Flow Control	✓	✓	✓	✓	✓	✓
Cable Testing	✓	✓	✓	✓	✓	✓
Web-based Management	✓	✓	✓	✓	✓	✓
HTTP	✓	✓	✓	✓	✓	✓
Cloud Management	✓	✓	✓	✓	✓	✓

Specifications

Hardware Features						
Model	RG-ES210GC-LP	RG-ES210GS-P	RG-ES216GC-V2	RG-ES218GC-P	RG-ES224GC-V2	RG-ES226GC-P
Reset Button	Rear	Rear	Front	Front	Front	Front
Cable Hot-swappable	✓	✓	✓	✓	✓	✓
Power Supply Slot	Power adapter	Power adapter	Single, fixed power supply	Single, fixed power supply	Single, fixed power supply	Single, fixed power supply
Power Consumption	≤ 80W	≤ 130W	≤ 12W	≤ 280W	≤ 14W	≤ 443W
Power Supplies	54V DC adapter, 1.5A	54V DC adapter, 2.4A	100 - 240V AC, 6A	100 - 240V AC, 6A	100 - 240V AC, 0.6A	100 - 240V AC, 6A
EEE	-	-	-	-	-	-
Fan	-	-	-	Built-in, lower than 25 °C stop running	-	Built-in, lower than 25 °C stop running
Fan Adaptive Speed Adjustment	-	-	-	✓	-	✓
Acoustic Noise	Noiseless	Noiseless	Noiseless	< 45dB	Noiseless	< 45dB
Operating Temperature	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)	0°C to 50°C (32°F to 122°F)	0°C to 40°C (32°F to 104°F)	0°C to 50°C (32°F to 122°F)	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Operating Humidity	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH
Storage Humidity	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH
Port Surge	4 kV	6 kV	4 kV	4 kV	4 kV	4 kV
Operating Altitude (meters)	-500 to 5000	-500 to 5000	-500 to 5000	-500 to 5000	-500 to 5000	-500 to 5000
Certificate	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS

Package Contents

Device	RG-ES205GC-P	RG-ES205GC	RG-ES206GC-P	RG-ES206GS-P	RG-ES208GC	RG-ES209GC-P
Power Supply	Power Adapter	Power Adapter	Power Adapter	Power Adapter	Power Adapter	Power Adapter
Quick Start Guide	1	1	1	1	1	1
Warranty Card	1	1	1	1	1	1
Accessories	-	-	-	-	-	-
Package Weight	0.9 kg	0.36 kg	0.79 kg	0.79 kg	0.49 kg	1.3 kg
Package Dimension (w x d x h)	249 mm x 217 mm x 62 mm	178 mm x 158 mm x 52 mm	249 mm x 217 mm x 62 mm	232mm x 211 mm x 61mm	197 mm x 172 mm x 52 mm	305 mm x 289 mm x 64 mm

Device	RG-ES210GC-LP	RG-ES210GS-P	RG-ES216GC-V2	RG-ES218GC-P	RG-ES224GC-V2	RG-ES226GC-P
Power Supply	Power Adapter	Power Adapter	Power cable	Power cable	Power cable	Power cable
Quick Start Guide	1	1	1	1	1	1
Warranty Card	1	1	1	1	1	1
Accessories	-	-	Mounting bracket * 2, Foot pad * 4, Screws * 6	Mounting bracket * 2, Foot pad * 4, Screws * 8	Mounting bracket, Foot pad * 4, Screws * 6	Mounting bracket * 2, Foot pad * 4, Screws * 8
Package Weight	1.38 kg	1.38 kg	2.7 kg	3.5 kg	2.8 kg	4.2 kg
Package Dimension (w x d x h)	305 mm x 289 mm x 64 mm	262mm x 222 mm x 75mm	539 mm x 254 mm x 92 mm	419 mm x 301 mm x 123 mm	539 mm x 254 mm x 92 mm	539 mm x 406 mm x 114 mm



 **R**edefine your **e**asy network

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Building 19, Juyuanzhou Industrial Park, No.618
Jinshan Road, Cangshan District, Fuzhou, Fujian, China
Website: <https://www.ruijienetworks.com>