



APC NetShelter Rack PDU Advanced power distribution unit (PDU) 48 AC outlet(s) 0U Black

Brand : APC

Product code: APDU10250SM

Product name : NetShelter Rack PDU Advanced

- Switched Metered Outlet, 11.5kW, 3PH
- 415V, 20A, 520P6
- 48 Outlet
- Power metering via remote access
- High Density
- Availability
- Agility
- Manageability


APC NetShelter Rack PDU Advanced, Switched Metered Outlet, 11.5kW, 3PH, 415V, 20A, 520P6, 48 Outlet

APC NetShelter Rack PDU Advanced. PDU types: Metered, Metered-by-outlet, Switched, Rack capacity: 0U, Type: Three-phase. AC outlets quantity: 48 AC outlet(s), AC outlet types: C13 coupler, C15 coupler, C19 coupler, C21 coupler, Power plug: IEC 60309. LED indicators: Activity, Network, Power, Cable length: 1.8 m, Security algorithms: 128-bit AES, 192-bit AES, 256-bit AES, DES, MD5, SNMP, SNMPv2, SNMPv3. Monitoring: Current, Humidity, Power, Temperature, Voltage, Outlet control: Lock-out, Recycle, Turn off, Turn on, Firmware upgradeable via: Network, USB. Nominal input voltage: 400 V, Maximum current: 16 A, AC input frequency: 50 - 60 Hz



Design		Power	
PDU types *	Metered, Metered-by-outlet, Switched	Nominal input voltage *	400 V
Type	Three-phase	AC input frequency	50 - 60 Hz
Form factor	Rackmount	Maximum current *	16 A
Rack capacity *	0U	Nominal output voltage	230 V
Mounting	Vertical	Output voltage	230 V
Product colour	Black	Load capacity	11500 VA
Display	LCD	Number of phases	3
On/off switch	✓	Maximum total current draw per phase	16 A
Regulatory Approvals	CE, CSA C22.2 No 62368-1, EN 62368-1, FCC part 15 subpart B, UKCA, UL 62368-1	Power protection features	Overload
Ports & interfaces		Maximum power	11500 W
AC outlets quantity *	48 AC outlet(s)	Weight & dimensions	
Power plug	IEC 60309	Width	56 mm
AC outlet types *	C13 coupler, C15 coupler, C19 coupler, C21 coupler	Depth	75 mm
Ethernet LAN (RJ-45) ports	2	Height	1490 mm
USB ports quantity	1	Weight	7.7 kg
Features		Packaging data	
Daisy chain	✓	Package weight	9.7 kg
Reset button	✓	Package width	208 mm
LED indicators	Activity, Network, Power	Package depth	116 mm
Surge protection	✓	Package height	1720 mm
Colour-coded outlets	✓	Operational conditions	
Cable length	1.8 m	Operating temperature (T-T)	-5 - 60 °C
Security algorithms	128-bit AES, 192-bit AES, 256-bit AES, DES, MD5, SNMP, SNMPv2, SNMPv3	Storage temperature (T-T)	-25 - 65 °C
Password protection	✓	Operating relative humidity (H-H)	5 - 95%
		Storage relative humidity (H-H)	5 - 95%
		Operating altitude	0 - 3048 m
		Non-operating altitude	0 - 15240 m

Features		Operational conditions	
Compatible products	Compatible with most NetShelter SX enclosures and third-party racks	Operating temperature (T-T)	23 - 140 °F
Management features		Technical details	
Monitoring	Current, Humidity, Power, Temperature, Voltage	Sustainability certificates	RoHS
Outlet control	Lock-out, Recycle, Turn off, Turn on		
Firmware upgradeable	✓		
Firmware upgradeable via	Network, USB		

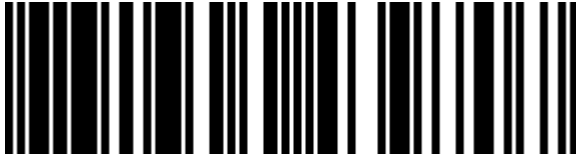

0731304439707



731304439707

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 04-MAY-2024. Prints or copies of Information are only valid on the printed Publication date