

AXIS TQ5001-E Wall-and-Pole Mount

Robust mount for PTZ cameras

With this wall-and-pole mount, installers can choose between using an RJ45 or IDC (insulation-displacement contact) connector for the installation. It features a built-in cable with an Ethernet IP66-rated RJ45 connector to facilitate installation and prevent water and dust from entering the camera. Made from impact-resistant, outdoor-ready material, AXIS TQ5001-E is suited for both indoor and outdoor environments. Flipping the mounting bracket makes it possible to turn AXIS TQ5001-E from a wall mount to a pole mount (AXIS Steel Straps TX30 are required). The mount is also suitable for corner mounting with an optional accessory.

- > **Robust, IK10-rated**
- > **For indoor and outdoor use**
- > **Versatile connection with IDC connector**
- > **Built-in IP66-rated RJ45 connector**
- > **5-year warranty**



AXIS TQ5001-E Wall-and-Pole Mount

Approvals

Product markings CSA, UL/cUL, UKCA, CE, KC, VCCI, RCM

Supply chain TAA compliant

EMC CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-6-1, EN 61000-6-2
Australia/New Zealand: RCM AS/NZS CISPR 32 Class A
Canada: ICES-3(A)/NMB-3(A)
Japan: VCCI Class A
Korea: KS C 9835, KS C 9832 Class A
USA: FCC Part 15 Subpart B Class A
Railway: IEC 62236-4

Safety CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3

Environment IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-27, IEC/EN 60529 IP66, IEC/EN 62262 IK10, NEMA 250 Type 4X, MIL-STD 810G 509.5

General

Supported products AXIS P55 Series
 AXIS P56 Series
 AXIS Q37 Series
 AXIS Q60 Series
 AXIS Q61 Series
 For a complete list of compatible cameras, go to axis.com/products/axis-tq5001-e-wall-and-pole-mount#compatible-products

Casing IP66-, NEMA 4X- and IK10-rated
 Aluminum casing
 Color: white NCS S 1002-B

Mounting Back: Cable hole
 Bottom: 3/4" (M25) conduit side entries

Connectors **Output:** IP66, RJ45 Ethernet (male)
Input: RJ45 Ethernet (female), IDC

Operating conditions -50 °C to 65 °C (-58 °F to 149 °F)
 Humidity 10–100% RH (non-condensing)

Storage conditions -40 °C to 65 °C (-40 °F to 149 °F)
 Humidity 10–100% RH (non-condensing)

Dimensions For the overall product dimensions, see the dimension drawing in this datasheet.

Weight 1960 g (4.3 lb)
Maximum load: 40 kg (88.2 lb)

Box content Mount, wall bracket, installation guide, cable ties, RJ45 mounting tool

Optional accessories AXIS ACI Conduit Adapters
 AXIS T91A64 Corner Bracket
 AXIS Steel Straps TX30 570 mm
 AXIS Steel Straps TX30 1450 mm
 For more accessories, go to axis.com/products

Warranty 5-year warranty, see axis.com/warranty

Part numbers Available at axis.com/products/axis-tq5001-e-wall-and-pole-mount#part-numbers


Sustainability

Substance control PVC free

Materials Screened for conflict minerals in accordance with OECD guidelines
 To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility axis.com/environmental-responsibility
 Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

Dimension drawing

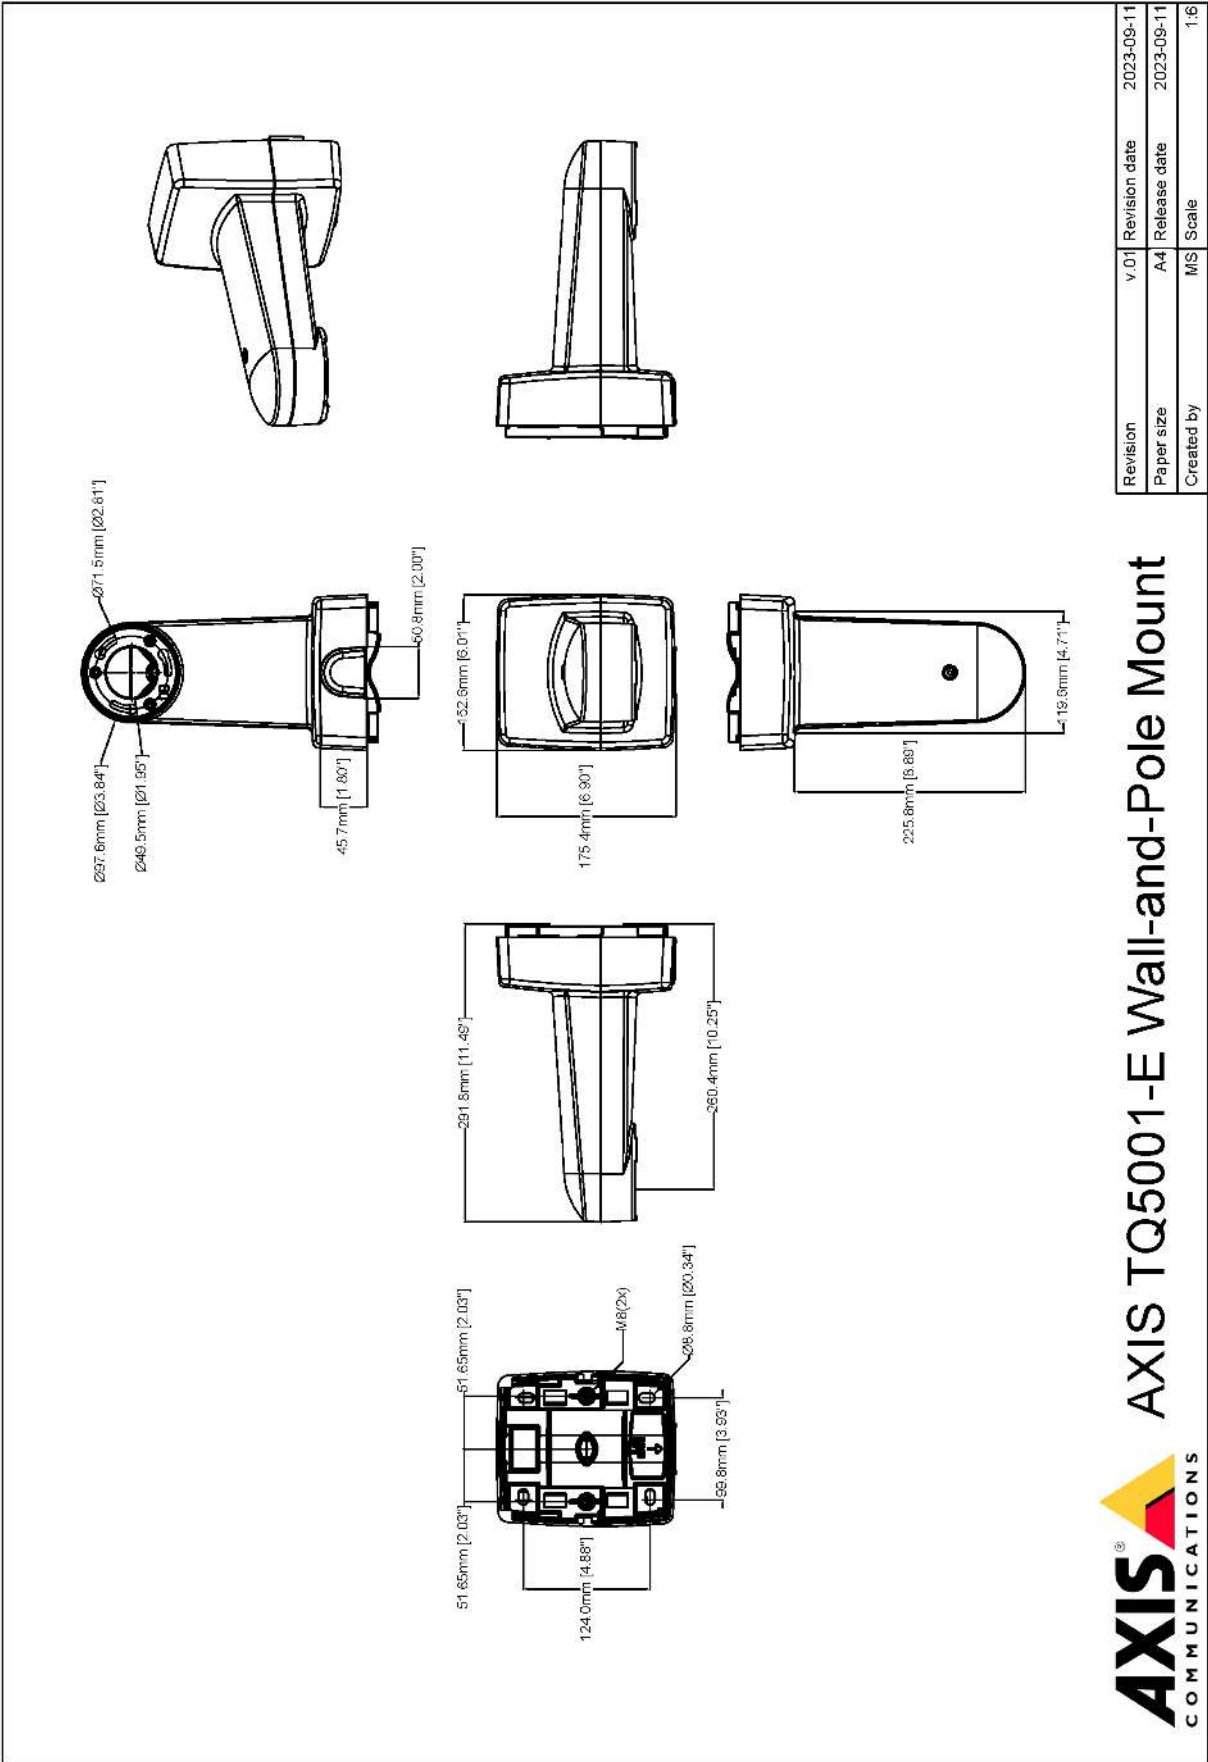

AXIS TQ5001-E Wall-and-Pole Mount

