

AXIS TP1001-E Wall-and-Pole Mount

Robust mount for dome cameras

With this wall-and-pole mount, installers can choose to use either an RJ45 or IDC (insulation-displacement contact) connector for the installation. It features a built-in cable with an Ethernet IP66-rated RJ45 connector to facilitate installation and prevent water and dust from entering the camera. Made from impact-resistant, outdoor-ready material, AXIS TP1001-E is suited for both indoor and outdoor environments. Flipping the mounting bracket makes it possible to turn AXIS TP1001-E from a wall mount to a pole mount (AXIS Steel Straps TX30 are required). The mount is also suitable for corner mounting with an optional accessory.

- > **Robust, IK10-rated**
- > **For indoor and outdoor use**
- > **Versatile connection with IDC connector**
- > **Built-in IP66-rated RJ45 connector**
- > **5-year warranty**



AXIS TP1001-E Wall-and-Pole Mount

Approvals

Product markings	CSA, UL/cUL, UKCA, CE, KC, VCCI, RCM
Supply chain	TAA compliant
EMC	CISPR 35, CISPR 32 Class A, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(A)/NMB-3(A) Japan: VCCI Class A Korea: KS C 9835, KS C 9832 Class A USA: FCC Part 15 Subpart B Class A Railway: IEC 62236-4
Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3
Environment	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-27, IEC/EN 60529 IP66, IEC/EN 62262 IK10, NEMA 250 Type 4X, MIL-STD 810G 509.5


General

Supported products	Cameras compatible with specific pendant kits with 1.5" NPS thread mount, such as: AXIS P3255-LVE camera AXIS Q3538-LVE camera AXIS P3727-PLC camera For a complete list of compatible cameras, go to axis.com/products/axis-tp1001-e-wall-and-pole-mount#compatible-products
Casing	IP66-, NEMA 4X- and IK10-rated Aluminum casing Color: white NCS S 1002-B
Mounting	Back: Cable hole Bottom: 3/4" (M25) conduit side entries
Connectors	Output: RJ45 Ethernet (male) Input: RJ45 Ethernet (female), IDC
Operating conditions	-50 °C to 65 °C (-58 °F to 149 °F) Humidity 10–100% RH (non-condensing)
Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 10–100% RH (non-condensing)
Dimensions	For the overall product dimensions, see the dimension drawing in this datasheet.
Weight	2164 g (4.8 lb) Maximum load: 40 kg (88.2 lb)
Box content	Mount, wall bracket, installation guide, cable ties, RJ45 mounting tool
Optional accessories	AXIS ACI Conduit Adapters AXIS T91A64 Corner Bracket AXIS Steel Straps TX30 570 mm AXIS Steel Straps TX30 1450 mm For more accessories, go to axis.com/products
Warranty	5-year warranty, see axis.com/warranty
Part numbers	Available at axis.com/products/axis-tp1001-e-wall-and-pole-mount#part-numbers

Sustainability

Substance control	PVC free
Materials	Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to axis.com/about-axis/sustainability
Environmental responsibility	axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

Dimension drawing

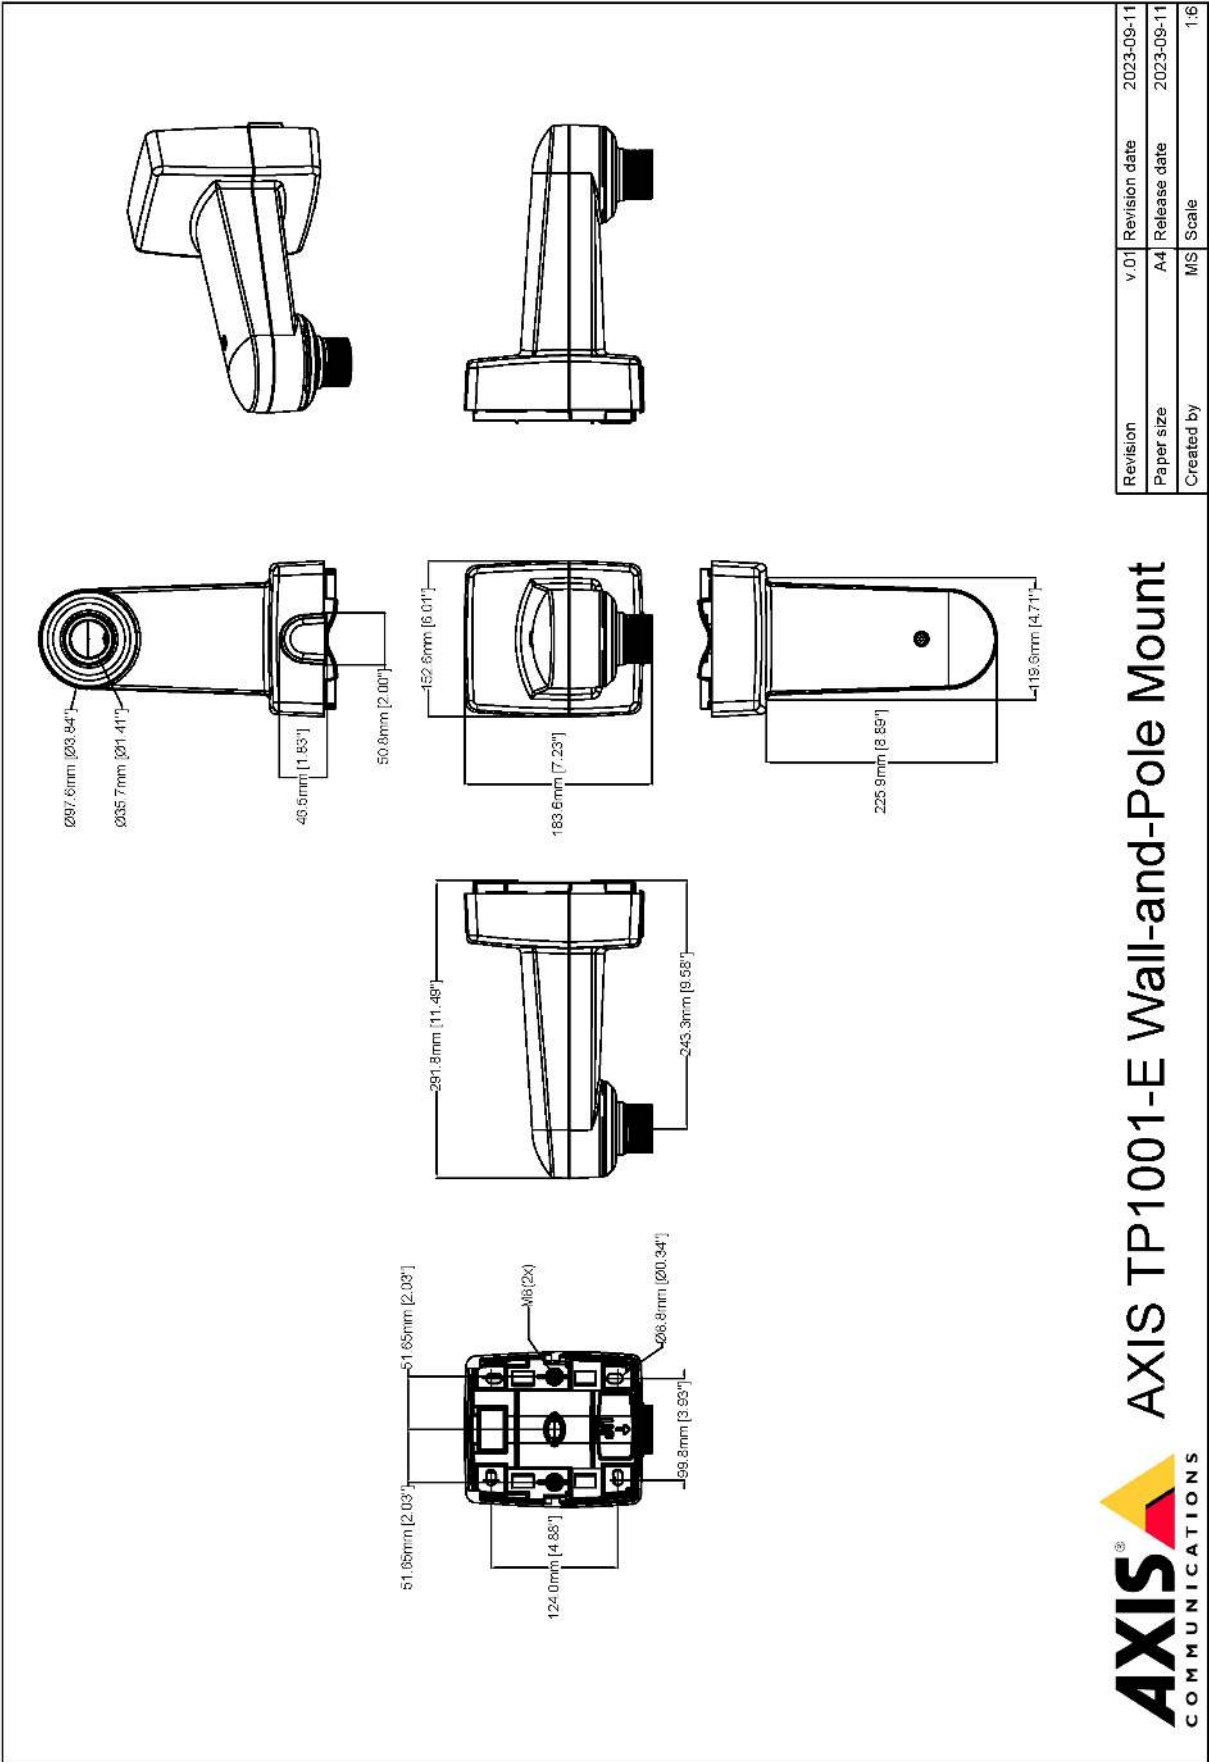

www.axis.com

