


AXIS TQ5301-E Corner Mount

Outer corner mount for Axis PTZ cameras

With a stylish design, this compact, all-in-one, outdoor-ready mount blends seamlessly into most indoor and outdoor environments. It offers flexible installation and can be mounted on either the left or right side to suit specific needs.

- > **Aesthetically appealing design**
- > **Mountable on either left or right side**
- > **Room for connectivity devices**
- > **Robust, IK10-rated**
- > **Outdoor and indoor-ready**

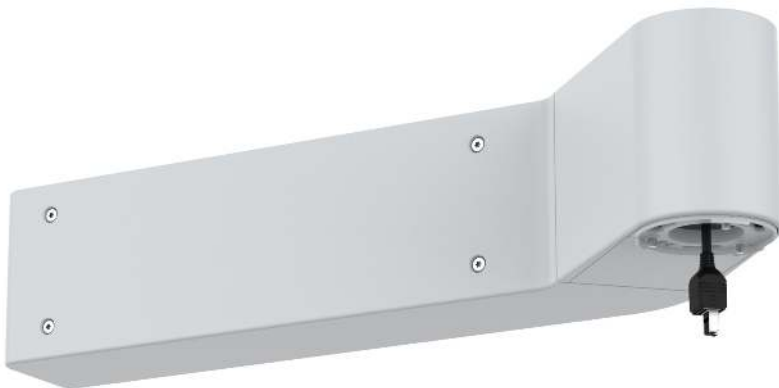

AXIS TQ5301-E Corner Mount

Approvals

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,
IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78,
IEC/EN 60529 IP66, IEC/EN 62262 IK10

General

Supported products

AXIS M5074
AXIS M5075
AXIS M5075-G
AXIS M5526-E
AXIS P5654-E Mk II
AXIS P5655-E
AXIS P5676-LE
AXIS Q6020-E
AXIS Q6074
AXIS Q6074-E
AXIS Q6075
AXIS Q6075-E
AXIS Q6078-E
AXIS Q6135-LE
AXIS Q6215-LE
AXIS Q6225-LE
AXIS Q6300-E
AXIS Q6325-LE
AXIS Q6355-LE
AXIS Q6358-LE
AXIS D2122-VE
AXIS D2123-VE

For a complete list of compatible cameras, go to axis.com/products/axis-tq5301-e-corner-mount#compatible-products

Casing

IP66- and IK10-rated

Plastic casing

Color: white NCS S 1002-B

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting.

This product can be repainted.

Connectors

Output: IP66, RJ45 Ethernet (male)

Input: RJ45 Ethernet (female), IDC

Operating conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 10–100% RH (condensing)

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 5–95% RH (non-condensing)

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

Effective Projected Area (EPA): 0.35 m² (1.15 ft²)

Weight

4635 g (10.2 lb)

Box content

Mount, installation guide, wall bracket, connector guard, cable ties, cable coupler

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

3-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-tq5301-e-corner-mount#part-numbers

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials

Renewable carbon-based plastic content: 70% (biobased)






Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability

Environmental responsibility

axis.com/environmental-responsibility

Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

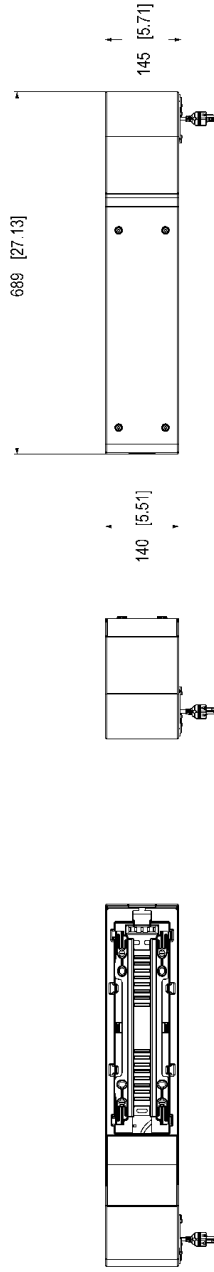

140 [5.51]


145 [5.71]

689 [27.13]



103 [4.06]
232 [9.13]

Bracket for TQ5301-E Corner Mount.

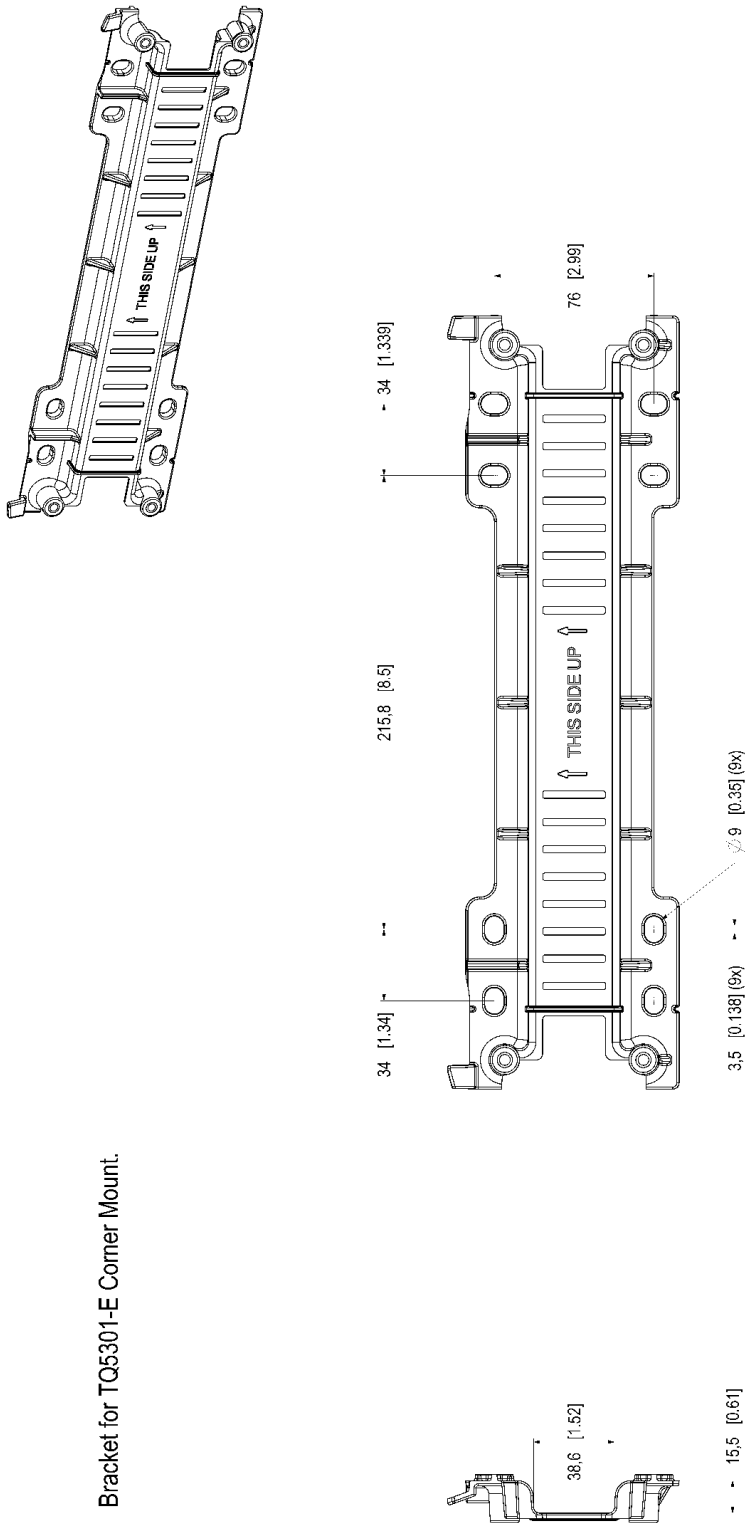

Axis Communications AB	2025-08-29	1.3	1.1
AXIS TQ5301-E	2025-08-29	1.3	1.1
10226549	2025-08-29	1.3	1.1

AXIS TQ5301-E Corner Mount

