


ROLINE UTP Cable Cat.5e (Class D), Stranded Wire, 300 m

Product No.	21.15.0520
Manufacturer	ROLINE
Manufacturer No.	21.15.0520
EAN (single piece)	7611990137183

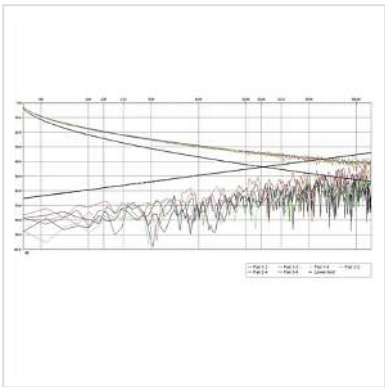

- Structured building wiring
- Impedance: 100 Ohm
- 3P verified
- Colour: Grey
- Construction 21.15.0520: 8 lines, copper, stranded wire AWG24
- Diagram: attenuation/near end crosstalk

For a structured cabling system we recommend to use the following components:
ROLINE Cat.5e UTP Cable, Solid Wire, AWG24: 21.15.0512 (100 m), 21.15.0511 (300 m)
ROLINE Cat.5e Flush/Surface Mount Wall Jack, unshielded: 25.16.8506 (white), 25.16.8501 (ivory)/25.16.8406 (white), 25.16.8401 (ivory)
ROLINE Cat.5e 19" Patch Panel, 24 Ports, unshielded: 26.11.0349 (black), 26.11.0347 (light grey)
ROLINE Cat.5e UTP Patch Cord, grey, 5 m: 21.15.0505

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

Technical specifications	
Manufacturer	ROLINE

Product group	Twisted Pair Cable
Product type	installation cable
Colour	grey
Length	300 m
Contents	300 m
Shield type	UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 24
Conductor type	Wire
Cable LSOH	No
Material (external cable mantle)	PVC
Weight	10.33 kg