


DIGITUS Modular patch panel, 24-port, equipped with 24x DN-93615

DN-91410-24
EAN 4016032505730

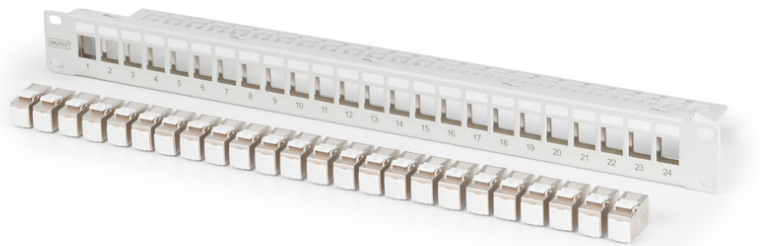

Modular Patch Panel, shielded, with 24x DN-93615 24-port, 1U, rack mount, grey RAL 7035

- Keystone mount version: Straight
- Application areas: 483 mm (19") distribution cabinet
- Standards: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for 483 mm (19") rack mounting
- Suitable for shielded Digitus® Keystone modules and connectors
- Central earthing connection
- Technical features:
- Housing material: 1.5 mm SPCC cold-rolled sheet steel, powder-coated
- Material standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401

- Material earthing bar: galvanized steel
- Physical properties:
- Operating temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Operating temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Color: Grey RAL7035
- equipped with 24x DN-93615 Keystone modules

Attributes

- Color: light grey, RAL 7035
- Ports: 24
- Units: 1
- Category: CAT 6A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:





Safety notes

- Protect product from moisture

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schöffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com