



HP 764 300-ml Matte Black Ink Cartridge

Brand : HP
Product code: C1Q16A

Product name : 764 300-ml Matte Black Ink Cartridge



- Designed for enterprise workgroups producing high-quality, professional colour and black-and-white drawings.
 - Ink cartridge
- 764 300-ml Matte Black Ink Cartridge

HP 764 300-ml Matte Black Ink Cartridge:

Designed for enterprise workgroups producing high-quality, professional colour and black-and-white drawings.

HP 764 Ink Cartridges produce crisp, clear results. Designed together with your HP DesignJet printer as an optimised printing system, Original HP inks can help reduce downtime and improve productivity. Fast-drying prints help you keep pace.

HP 764 300-ml Matte Black Ink Cartridge. Compatibility: HP DesignJet T3500 Production eMFP series, Print technology: Thermal inkjet, Printing colours: Black. Width: 283 mm, Depth: 41 mm, Height: 118 mm. Package width: 283 mm, Package depth: 41 mm, Package height: 118 mm. Master (outer) cases per pallet: 102 pc(s), Products per pallet: 510 pc(s), Layers per pallet: 6 pc(s). Pallet dimensions (W x D x H): 1016 x 1219.2 x 919.48 mm, Pallet size (EU): 1016 x 1219.2 x 919.48 mm




Performance		Logistics data	
Compatibility *	HP DesignJet T3500 Production eMFP series	Master (outer) cases per pallet	102 pc(s)
Print technology	Thermal inkjet	Pallet dimensions (W x D x H)	1016 x 1219.2 x 919.48 mm
Printing colours	Black	Products per pallet	510 pc(s)
Country of origin	Singapore	Layers per pallet	6 pc(s)
Weight & dimensions		Pallet size (EU)	1016 x 1219.2 x 919.48 mm
Width	283 mm	Products per pallet (EU)	510 pc(s)
Depth	41 mm	Pallet gross weight	248 kg
Height	118 mm	Quantity per pack	1 pc(s)
Weight	450 g	Pallet weight (EU)	248 kg
Packaging data		Technical details	
Package width	283 mm	Box contents	Ink cartridge
Package depth	41 mm	Total carbon footprint (kg of CO2e)	0.8
Package height	118 mm	Master (outer) cases per pallet layer	17 pc(s)
Package weight	490 g	Other features	
Operational conditions		UNSPSC-code	44103105
Operating temperature (T-T)	5 - 40 °C		
Operating relative humidity (H-H)	20 - 80%		
Storage temperature (T-T)	-25 - 55 °C		



0887758703687



887758703687

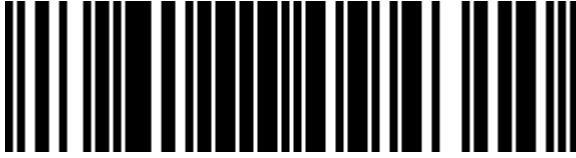

0196188094310



196188094310

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.