



APC GVSUPS20K0B4HS uninterruptible power supply (UPS) Double-conversion (Online) 20 kVA 20000 W

Brand : APC

Product code: GVSUPS20K0B4HS

Product name : GVSUPS20K0B4HS


20kW, 400V, 20.0kWatts / 20.0kVA, 400V, 3PH, 36.0A, IP20

APC GVSUPS20K0B4HS. UPS topology: Double-conversion (Online), Output power capacity: 20 kVA, Output power: 20000 W. AC outlet types: Hard Wire 5-wire (3PH + N + G). Battery technology: Sealed Lead Acid (VRLA), Battery voltage: 480 V. Form factor: Tower, Product colour: White, Display type: LED. Compliance certificates: RoHS, Certification: IEC 62040-1-1, IEC 62040-2, OSHPD



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery voltage	480 V
Output power capacity *	20 kVA	Design	
Output power *	20000 W	Form factor *	Tower
Waveform *	Sine	Product colour *	White
Input operation voltage (min) *	384 V	Display type	LED
Input operation voltage (max) *	480 V	International Protection (IP) code	IP20
Input frequency *	40/70 Hz	Compatibility	Schneider Electric's lithium ion battery solution
Output operation voltage (min)	340 V	Operational conditions	
Output operation voltage (max)	460 V	Operating temperature (T-T)	0 - 40 °C
Output frequency	50/60 Hz	Storage temperature (T-T)	-15 - 40 °C
Maximum current	54 A	Operating relative humidity (H-H)	0 - 95%
Number of input phases	3	Operating altitude	0 - 1005.84 m
Number of output phases	3	Non-operating altitude	0 - 3048 m
Power factor	0.99	Certificates	
Crest factor	2.5:1	Compliance certificates	RoHS
ECO mode	✓	Certification	IEC 62040-1-1, IEC 62040-2, OSHPD
Output voltage Total Harmonic Distortion (THD)	3%	Packaging content	
Input current Total Harmonic Distortion (THD)	3%	Management card included	✓
Noise level	55 dB	Weight & dimensions	
Power protection features	Overload, Short circuit	Width	521 mm
Audible alarm(s)	✓	Depth	847 mm

Ports & interfaces		Weight & dimensions	
AC outlet types	Hard Wire 5-wire (3PH + N + G)	Height	1485 mm
SmartSlot	✓	Weight	200 kg
SmartConnect port	✗	Packaging data	
Battery		Package width	640 mm
Battery technology	Sealed Lead Acid (VRLA)	Package depth	990 mm
		Package height	1680 mm
		Package weight	200 kg
		Logistics data	
		Harmonized System (HS) code	85078000

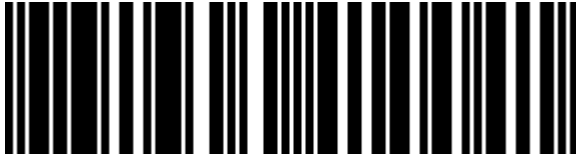

0731304410041




731304410041



8592978317249



4064575130681

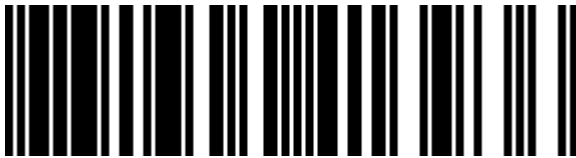

0731304413936



731304413936

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.