




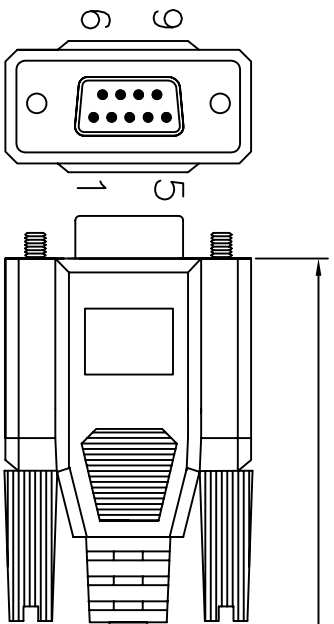


DB 9F (NICKEL PLATED)
BEIGE MOLDING

ITEM NO.	Length	Tolerance	STICKER
AK 7252	1800mm	30mm	8716065114935
AK 7253	3000mm	30mm	8716065114942
AK 7254	5000mm	50mm	8716065114959

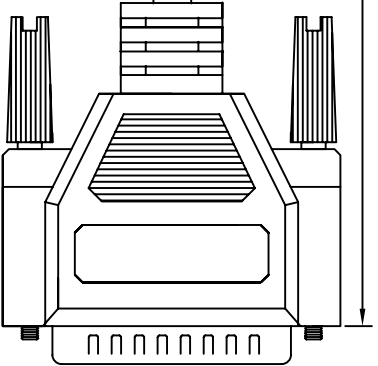

DB 25M(NICKEL PLATED)
BEIGE MOLDING

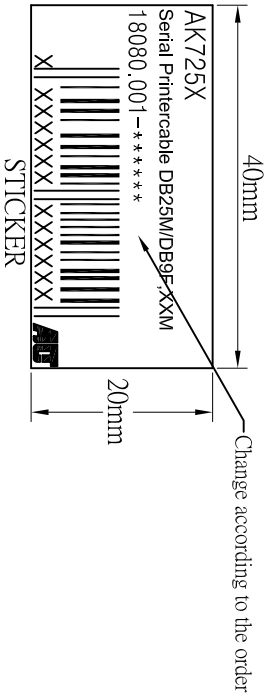


- NOTE:
1. CABLE:NON-UL 28#*8C+1+AL,OD=5.0mm,BEIGE COLOR,PVC JACKET.
 2. LENGTH: L
 3. CONNECTOR:DB 9F*1PCS,DB25M*1PCS,(BLUE INSULATOR,NICKEL PLATED)
 4. MOLD:"IBM" MOLDING(BEIGE COLOR)
 5. SCREW: #4-40 UNC*4 SCREW
 6. CONTACTS:

DB 9F	2	3	1	4	5	7+8	6	9	64
DB 25M	2	3	4+5	6	7	8	20	22	64 DRAIN
 7. OPEN/SHORT TEST: 100% TEST.
- INSULATION: MIN. 5M.

RoHS Compliant

Company	IBV		Goods Code		Draw		FC001 WJF		Date	2009.10.14	
ITEM NO.	AK 725X		Drawing Evidence		Check				Date		
Goods NO.									Date		
Original NO.	S-*****	Unit(mm)			Approval				Date		

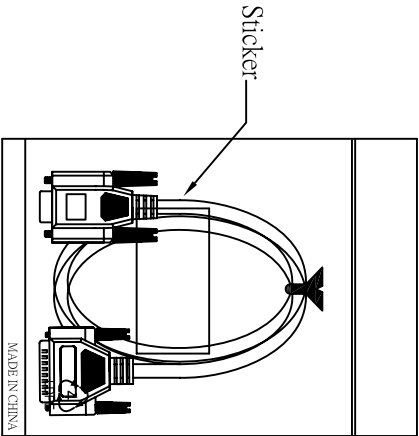

1PCS/PE BAG(0.06*190*300mm)+Sticker



D		
C		
B	REVISED THE CONTACTS& ADDING PACKAGING INFO	10.04.26.HOS
VER. A	REVISE	Date