

REV	DATE	MODIFICATION	DRAWN
	25/12/09		

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.

DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.

INSULATION RESISTANCE: 100 M Ω .

TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.

DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:






HOUSING: POLYCARBONATE, UL94V-2 OR UL94V-0.

COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.

CONTACT BLADE: COPPER ALLOY.

CONDUCTOR : STRANDED & SOLID WIRE , 24AWG, 26 AWG.

GOLD PLATING: 3u"-50u",ARE AVAILABLE.

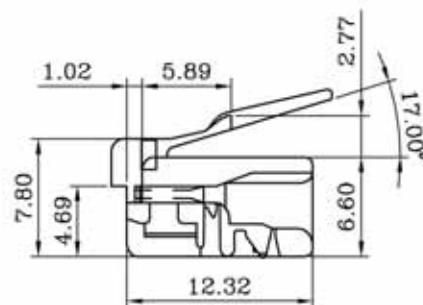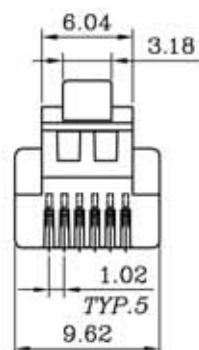

BLADE:	A				
Drawing			CABLE TYPE	ROUND	
Mark	✓		Mark	✓	
GOLD PLATING					50u"
Mark					✓

ACE						
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL	DWG NO.			
		PC	TD104M			
.X±0.20	.X*±5°	TITLE				
.XX±0.10	.XX*±2°					
APPROVAL	CHECKED	DRAWN	SCALE	2/1	SHEET	1/1
沈红波	钟均江		LiJing	PROJ.		REV