



HP E24m G4 computer monitor 60.5 cm (23.8") 1920 x 1080 pixels Full HD Black, Silver

Brand : HP

Product code: 40Z32AS

Product name : E24m G4

60.5cm (23.8") Full HD 1920 x 1080 Edge LED IPS, 16:9, 300cd/m², 16.7M, 5ms, 178°/178°, 1000:1

HP E24m G4 computer monitor 60.5 cm (23.8") 1920 x 1080 pixels Full HD Black, Silver:

Connect with Confidence. Conference with Ease.


Conference and connect with ease with the Zoom Certified HP E24m G4 USB-C Conferencing Monitor that has an integrated 5MP, tilt-adjustable webcam, front-firing speakers, and dual mics. Work effortlessly and simplify your set up with one USB-C® cable^[1] that delivers data, video, and up to 65W of laptop charging.

HP E24m G4. Display diagonal: 60.5 cm (23.8"), Display resolution: 1920 x 1080 pixels, HD type: Full HD, Response time: 5 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in speaker(s). Built-in USB hub. VESA mounting, Height adjustment. Product colour: Black, Silver



Display		Ports & interfaces	
Display diagonal *	60.5 cm (23.8")	DisplayPorts quantity	2
Display resolution *	1920 x 1080 pixels	DisplayPort version	1.2
HD type *	Full HD	Audio input	✓
Native aspect ratio *	16:9	Audio output	✓
Panel type *	IPS	Headphone connectivity	3.5 mm
Backlight type	Edge LED	HDCP	✓
Touchscreen *	✗	Ergonomics	
Display brightness (typical)	300 cd/m ²	VESA mounting *	✓
Response time *	5 ms	Panel mounting interface	100 x 100 mm
Anti-glare screen	✓	Cable lock slot *	✓
Screen shape *	Flat	Height adjustment *	✓
Supported graphics resolutions	640 x 480 (VGA), 720 x 400, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1440 x 900 (WXGA+), 1600 x 900, 1680 x 1050 (WSXGA+), 1920 x 1080 (HD 1080)	Adjustable height (max)	15 cm
		Pivot	✓
Contrast ratio (typical) *	1000:1	Pivot angle	-90 - 90°
Contrast ratio (dynamic)	10000000:1	Swivelling	✓
Maximum refresh rate *	75 Hz	Swivel angle range	-45 - 45°
Viewing angle, horizontal	178°	Tilt adjustment	✓
Viewing angle, vertical	178°	Tilt angle range	-5 - 23°
Display number of colours *	16.7 million colours	Power	
Pixel pitch	0.2745 x 0.2745 mm	Power consumption (typical) *	3.7 W
Pixel density	93 ppi	Power consumption (standby) *	0.5 W
Digital horizontal frequency	30 - 85 kHz	Power consumption (max)	150 W
Digital vertical frequency	50 - 75 Hz	AC input voltage	100 - 240 V
Display diagonal (metric)	60.45 cm	AC input frequency	50 - 60 Hz
Surface hardness	3H	Power supply type	Internal
Colour depth	8 bit	Operational conditions	
		Operating temperature (T-T)	5 - 35 °C


Display		Operational conditions	
Colour gamut standard	sRGB	Operating relative humidity (H-H)	20 - 80%
Colour gamut	99%	Weight & dimensions	
Performance		Width (with stand)	539.4 mm
Flicker-free technology	✓	Depth (with stand)	216 mm
Low Blue Light technology	✓	Height (with stand)	530.7 mm
HP segment	Business	Weight (with stand)	7.39 kg
Multimedia		Width (without stand)	539.4 mm
Number of speakers	2	Depth (without stand)	47 mm
RMS rated power	10 W	Height (without stand)	355.6 mm
Built-in speaker(s) *	✓	Packaging data	
Megapixel (approx.)	5 MP	Package width	603 mm
Built-in microphone	✓	Package depth	192 mm
Built-in camera *	✓	Package height	421 mm
Design		Package weight	10.3 kg
Market positioning *	Business	Sustainability	
Product colour *	Black, Silver	Sustainability certificates	ENERGY STAR
Detachable stand	✓	Other features	
Ports & interfaces		Country of origin	China
Built-in USB hub *	✓	Certification	Australian-New Zealand MEPS; BIS; BSMI; CB; CCC; CE; CECP; CEL; CEL Grade 1; cTUVus; EAC; ENERGY STAR®; E-standby; FCC; ISO 9241-307; KC/KCC; NOM; PSB; RCM; SEPA; TCO Certified; TCO Certified Edge; TUV-S; VCCI; Vietnam MEPS; WEEE; ISC; Mexico Energy; ICE; UAE; TGM; TUV-GS; Ukraine certificates; NRCS of South Africa; Belarus Energy
USB Type-A downstream ports quantity	4		
USB Type-C downstream ports quantity	1		
USB Type-C DisplayPort Alternate Mode	✓		
HDMI *	✓		
HDMI ports quantity	1		
HDMI version	1.4		
		Logistics data	
		Harmonized System (HS) code	85285210

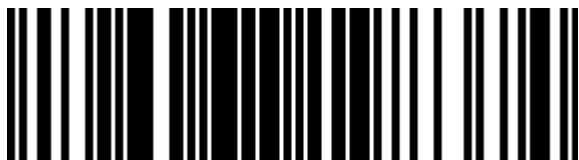

0196068198374




196068198374

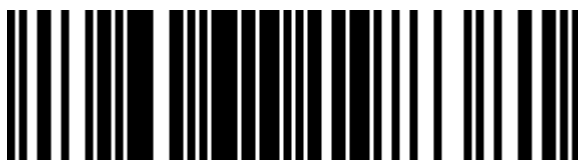

0196068198381




196068198381

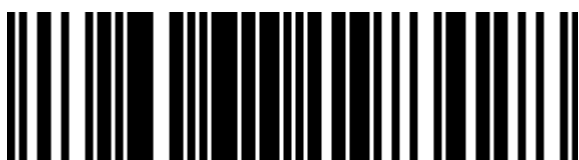


0196068198428




196068198428

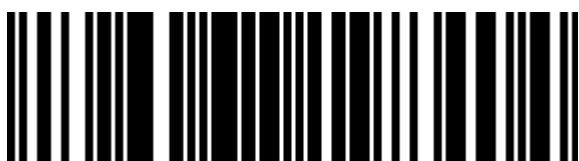

0196068198404




196068198404

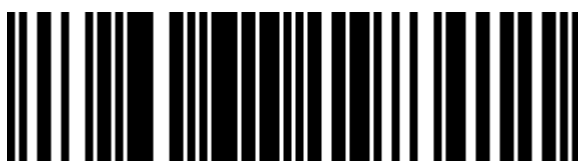

0196068198411



196068198411

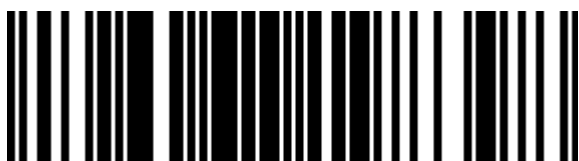

0196068198398



196068198398



5715063337707

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 12-APR-2026. Prints or copies of Information are only valid on the printed Publication date